


Hinge Kit
 will brace for grease duct lag into
 Block welded to duct.

High temp clean out door
 Duct drying exciting window plated
 with 16ga galv steel
 Intake Hood

24ga galv steel
 Ducting

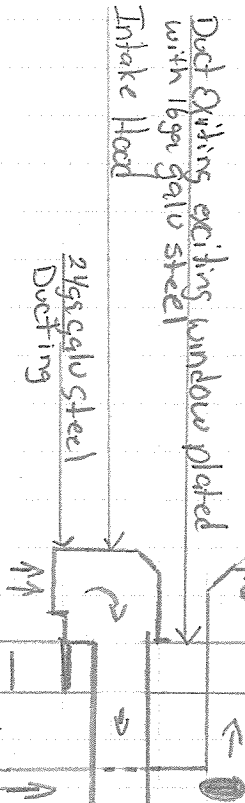


Lower roof Flat

3" Air space behind Hood

Block wall

2x4 wood stud wall with 5/8 rated
 Sheetrock

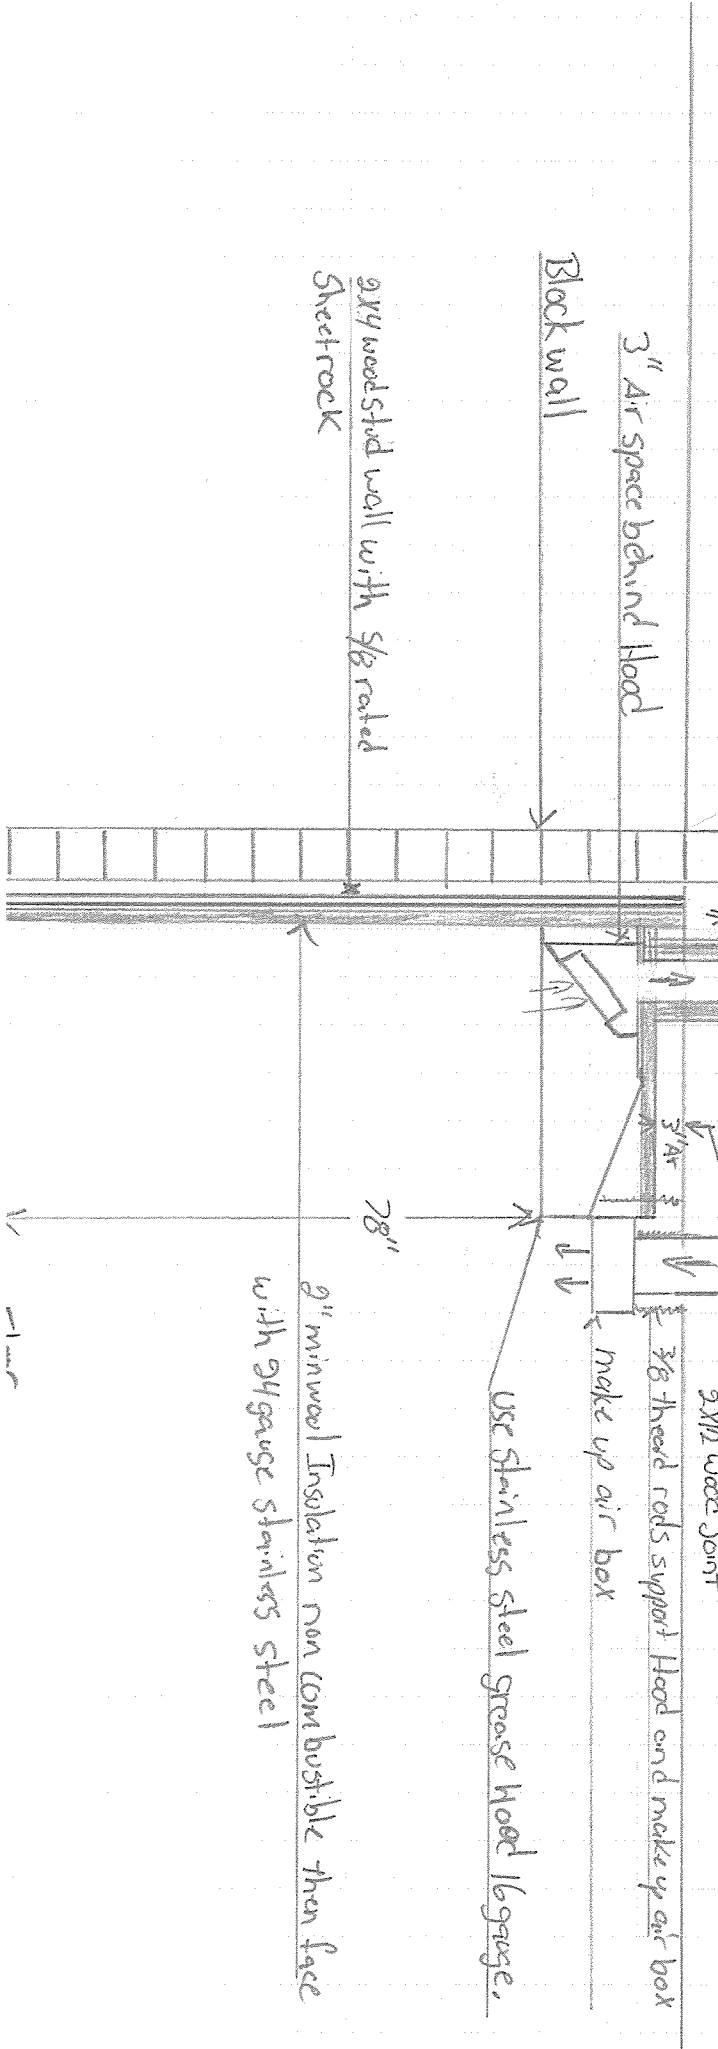

Flat roof

Use fan

615' 3m grease duct wrap from Need
 to About wooden floor 18\"/>

3" Air space top of 2" min wool board non combustible
 and floor

2x12 wood joint

3/8 threaded rods support Hood and make up air box
 make up air box

Use stainless steel grease Hood 16 gauge.

2" min wool Insulation non combustible than face
 with 24 gauge stainless steel

78"