

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
 Division of Health Engineering, Station 10 SHS
 (207) 287-5672 FAX (207) 287-4172

Town, City, Plantation
PORTLAND (PEAKS ISLAND)



Street, Road Subdivision
96 LEDGEWOOD STREET

Owner's Name
18 PLEASANT STREET ASSOCIATES

SITE PLAN

Scale 1" = 50 Ft.
 or as shown

SITE LOCATION PLAN
 (Attach Map from Maine Atlas Recommended)

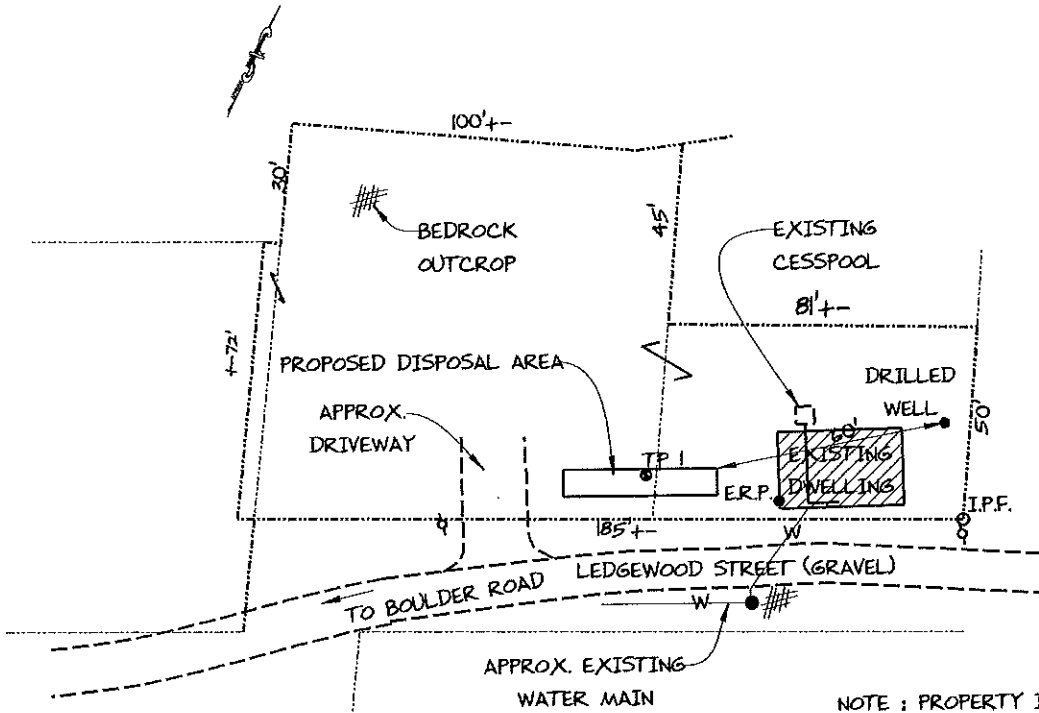

REDUCTION IN SETBACKS BETWEEN A SINGLE FAMILY BEDROCK WELL AND THEIR OWN FIRST TIME, LESS THAN 1000 GPD DISPOSAL FIELD

DEPTH OF WELL CASINGS OR LINER SEAL BELOW GROUND LEVEL	REDUCTION IN THE MINIMUM 100 FT. SETBACK DISTANCE
>40 FEET TO 55 FEET	100 DOWN TO 90 FEET
>55 FEET TO 70 FEET	100 DOWN TO 80 FEET
>70 FEET TO 85 FEET	100 DOWN TO 70 FEET
>85 FEET	100 DOWN TO 60 FEET

NOTE: PROPERTY INFORMATION APPROXIMATED PER TOWN TAX MAP AND AERIAL PHOTOGRAPH. VERIFY LOT LINES TO ASSURE PROPER SETBACKS

SOIL DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole TP 1 Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil _____

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0			DARK BROWN	
10		FRIABLE	YELLOWISH BROWN	
20	FINE SANDY LOAM		LIGHT OLIVE BROWN	FEW, DISTINCT
30		FIRM	OLIVE BROWN	COMMON, DISTINCT
40	LIMIT OF EXCAVATION			
50				

Soil Classification 3 Profile	Condition C	Slope 2 %	Limiting Factor 15"	<input checked="" type="checkbox"/> Ground Water <input type="checkbox"/> Restrictive Layer <input type="checkbox"/> Bedrock <input type="checkbox"/> Pit Depth
--	-----------------------	---------------------	-------------------------------	--

Observation Hole _____ Test Pit Boring
 " Depth of Organic Horizon Above Mineral Soil _____

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10				
20				
30				
40				
50				

Soil Classification Profile _____	Condition _____	Slope _____ %	Limiting Factor " _____	<input type="checkbox"/> Ground Water <input type="checkbox"/> Restrictive Layer <input type="checkbox"/> Bedrock <input type="checkbox"/> Pit Depth
--------------------------------------	--------------------	------------------	----------------------------	---

Albert Frick
 Site Evaluator Signature

352
 SE *

1/24/17
 Date