



- Window Schedule:
- Upstairs
 - 30" x 60" Marvin Integrity
 - Egress Casements
 - U Factor 0.27 - 0.28
 - Solar Heat Gain (SHGC) 0.27
 - Kitchen
 - 30"x48" Marvin Integrity
 - Double hung
 - U Factor 0.28 - 0.29
 - Solar Heat Gain (SHGC) 0.28

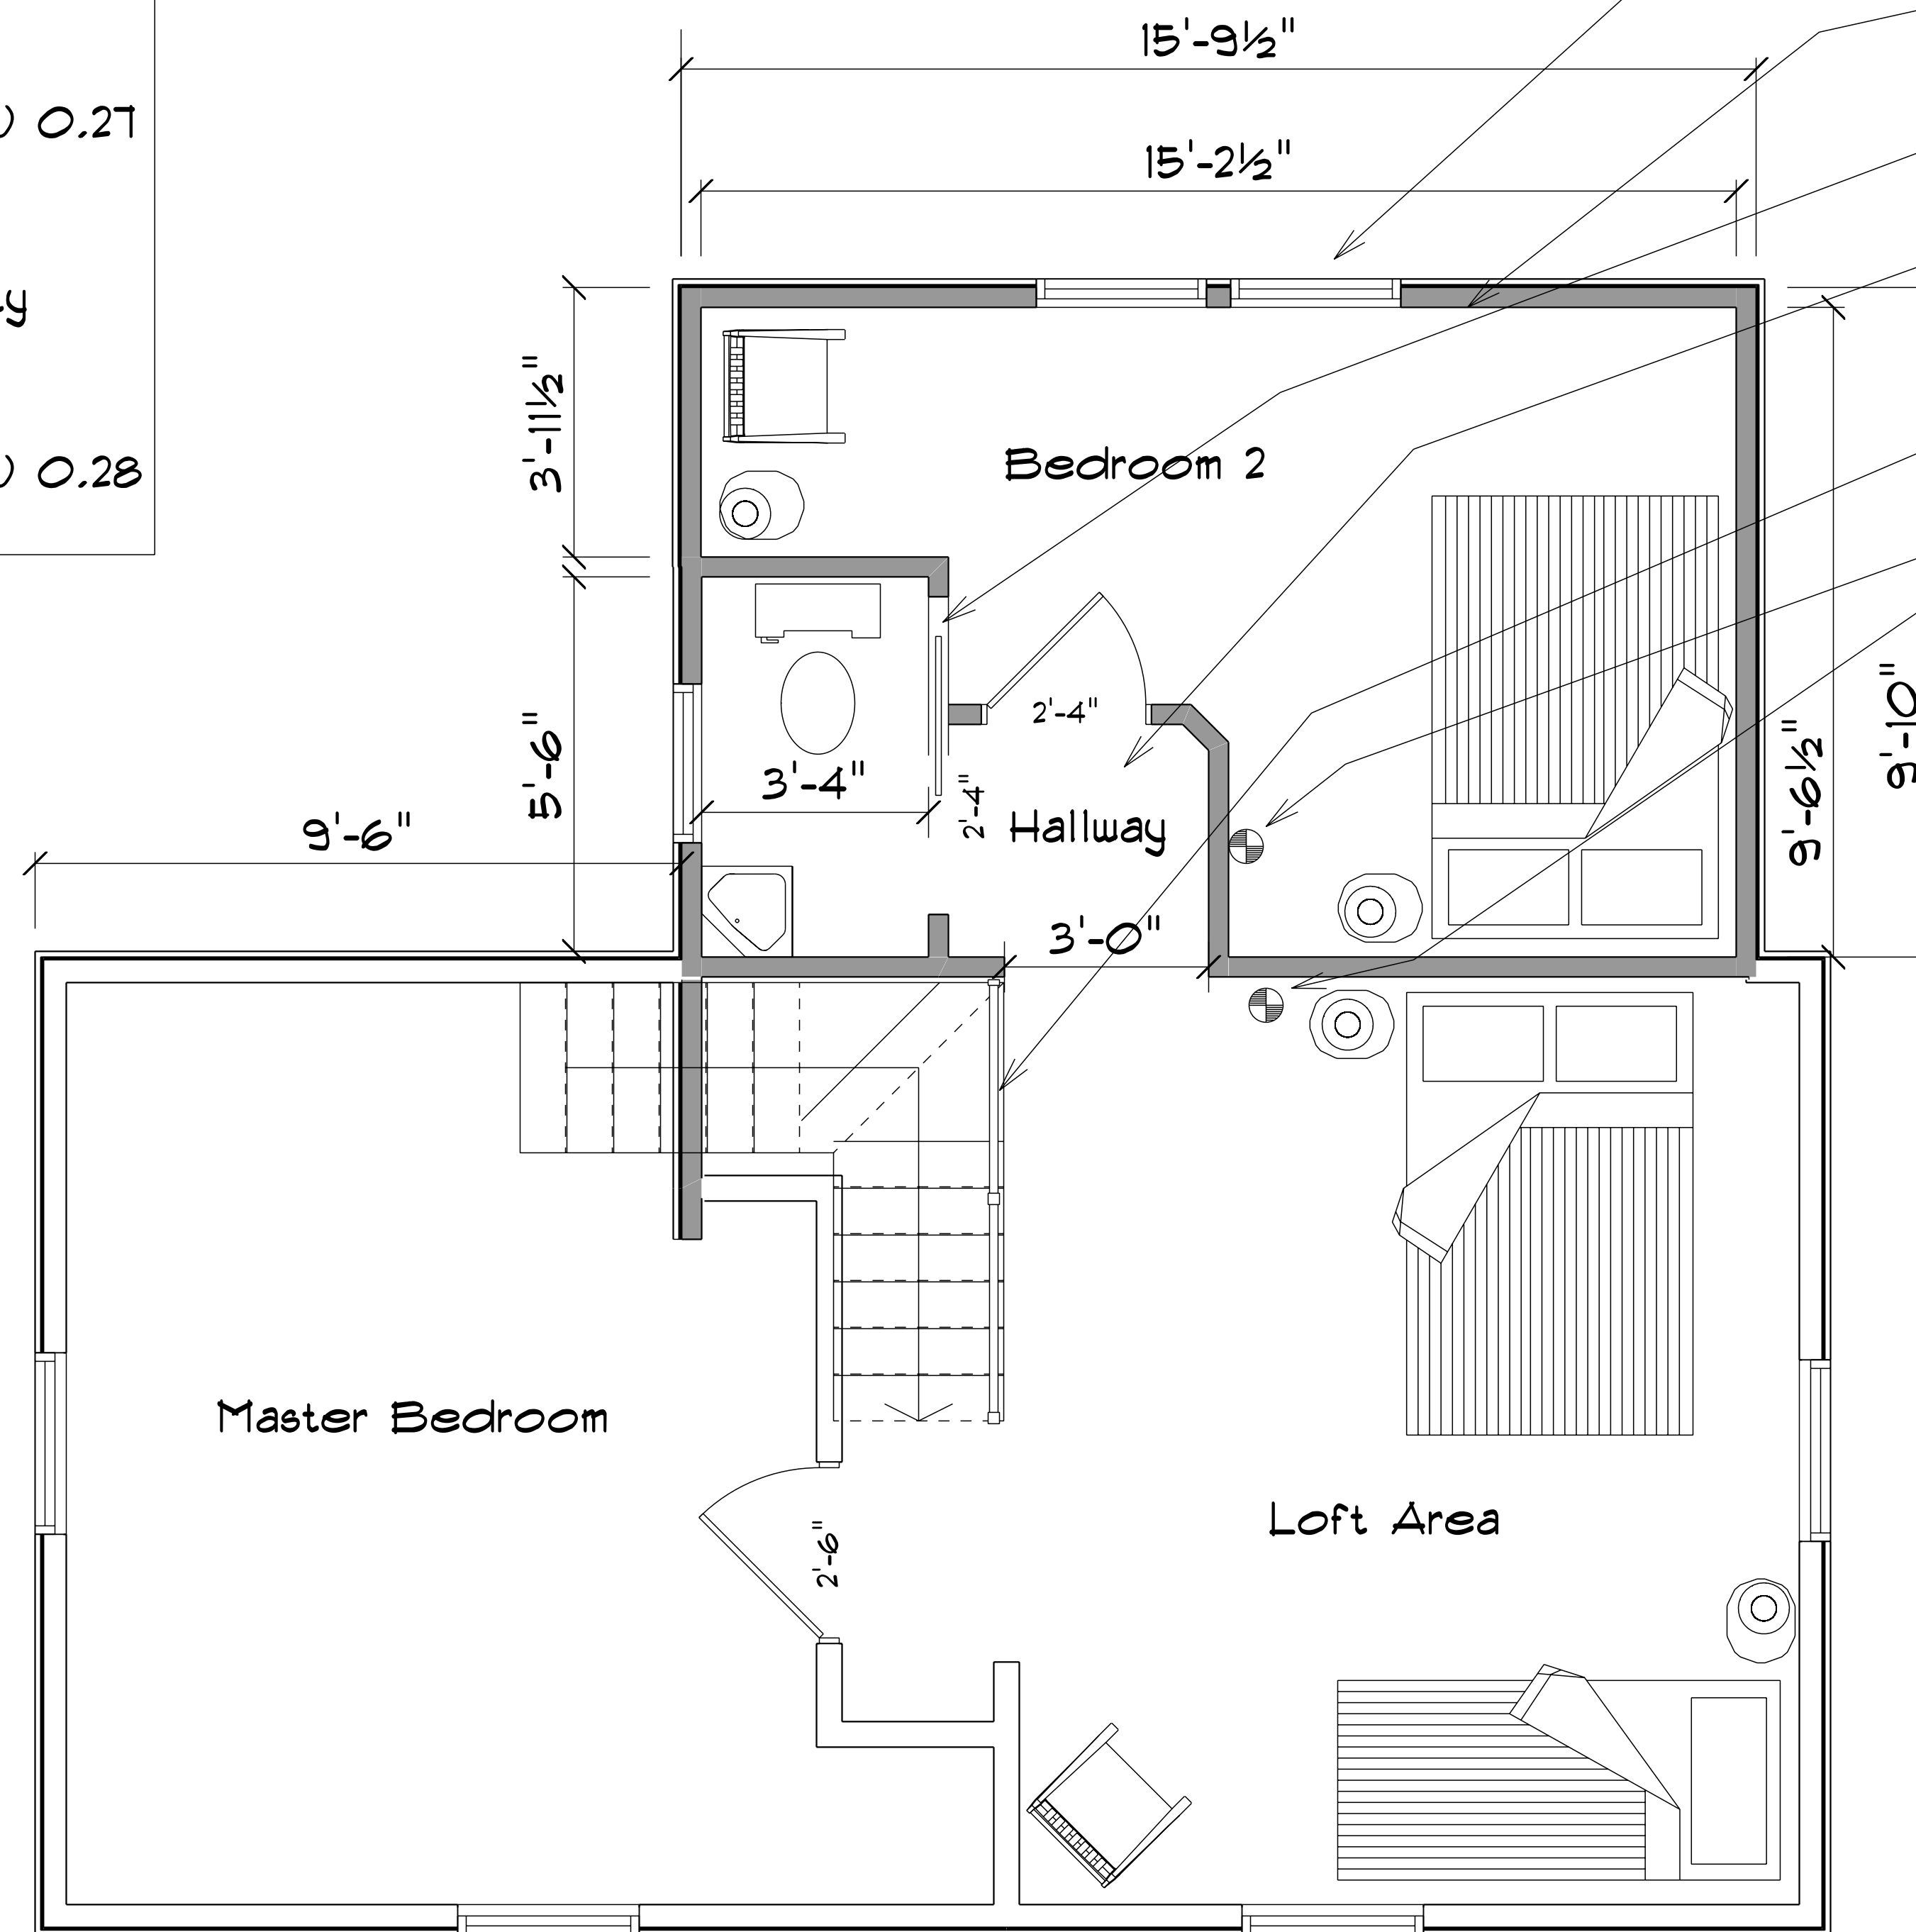

- Notes:
- Egress window at new gable wall
 - 3/4" pine wall sheathing at bedroom
 - 1/2" drywall at bathroom
 - Shed dormer provides headroom at bathroom and hallway.
 - Existing stairs to remain
 - Smoke detectors at bedroom and loft

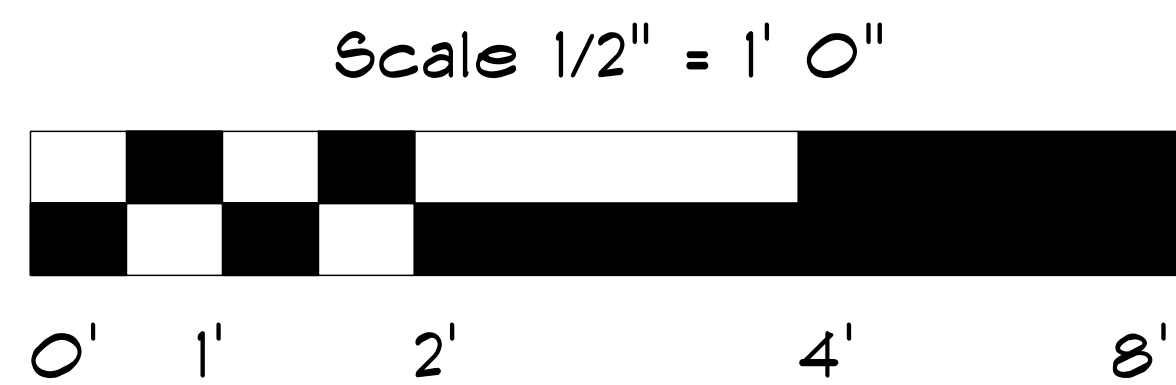

Second Floor- Gable Dormer
SCALE: 1/2" = 1'-0"