

Submittal Data: System 30RLX ASU30RLX & AOU30RLX



Job Name: Melissa and Eric Conrad Location: 152 Brackett Ave, Peaks Island
 Purchaser: Same
 Engineer: n/a
 Submitted To: City of Portland For: Reference Approval Construction
 Submitted By: Goggin Energy
 Unit Designation: Schedule No. Model No.:

Capacities:

Cooling	30,600 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	32,000 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	9.5
SEER	17.5
EER <i>Cooling/Heating</i>	10.0/10.7
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	49/ 42/ 37/ 33
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	49/ 42/ 37/ 33
Weight	31 lbs.


Outdoor Unit:

Noise Level <i>Cooling/Heating</i>	54/55
Recommended Fuse Size	30A
Min. Ampacity	13.1A
MCA	22A
Running Current <i>Cooling</i>	13.2A
Running Current <i>Heating</i>	10.5A
Weight	137 lbs.

Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	164 ft.
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

OUTLINE AND DIMENSIONS

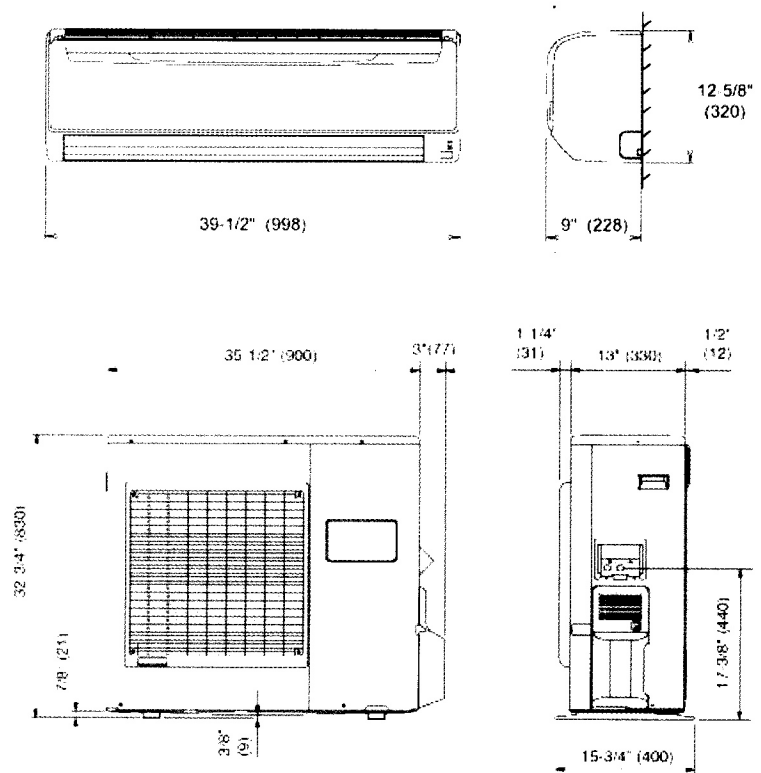

Standard Features:

- Six year compressor warranty
- Two year parts warranty
- Digital wireless remote control
- 4-way automatic louvers
- Min Heat (50F heating set point)
- Built in Low Ambient
- Auto Restart/ Reset
- 24 hour timer
- Optional Wired Remote Control
- Dry mode
- Refrigerant R410A
- Quiet Mode

Note::