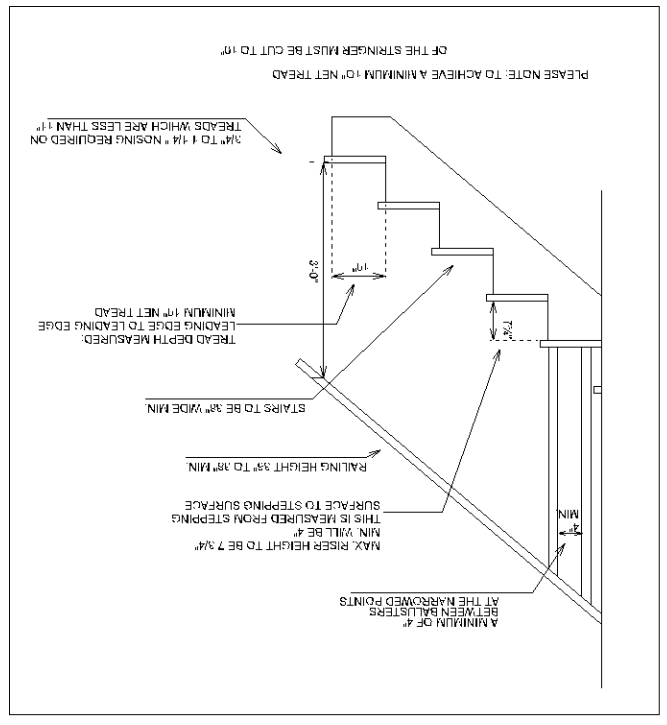

FASTENING SCHEDULE (SEE TABLE 2304.9.1 ME.S. RESIDENTIAL CONSTRUCTION CODE FOR COMPLETE DETAILS)

(SEE NOTES A + M FOR ALL FASTENING NOTES)

NOTES	LOCATION	FASTENING	CONNECTION
SEE NOTE: F		P/NEL S DNG (TO FRAMNO)	SEE NOTE: F
SEE NUTE: F		P/NEL S DNG (TO FRAMNO)	SEE NUTE: F
SEE NOTE: C		SUBFLOOR-UNDERLAYMENT TO FRAMING SINGLE FLOOR CONSIDERATION 3/4" OR LESS	SEE NOTE: C
SEE NOTE: P SEE NOTE: N SEE NOTE: C , J		& PARTICLE BOARD WOOD STRUCTURAL PANELS 2-3/8"-0 1/2" YAL	SEE NOTE: P SEE NOTE: N SEE NOTE: C , J
&d, SEE NOTE: D, &d, SEE NOTE C		2" 1& GAGE &d O/C &d	&d, SEE NOTE: D, &d, SEE NOTE C
		1-3/4" 1& 3AGE WOOD STRUCTURAL PANELS 19"2" - 3/4"	
		3 - 3"&, 14 GAGE STAPLES &d COMMON	LEDGER STRIP
		3 - 3"&, 14 GAGE STAPLES &d COMMON	JOIST TO SAND JOIST
		3 - 3"&, 14 GAGE STAPLES &d COMMON	&Y RIDGE BEAM ROOF RAFTER TO
		3 - 3"&, 14 GAGE STAPLES &d COMMON	&Y RIDGE BEAM ROOF RAFTER TO
		3 - 3"&, 14 GAGE STAPLES &d COMMON	TOENAIL
		3 - 3"&, 14 GAGE STAPLES &d COMMON	JACK RAFTERS TO HIP
		3 - 3"&, 14 GAGE STAPLES &d COMMON	JACK RAFTERS TO HIP
		3 - 3"&, 14 GAGE STAPLES &d COMMON	TOE NAIL
		4 - 3"&, 14 GAGE STAPLES &d COMMON	COLLAR TIE TO RAFTER
		3 - 3"&, 14 GAGE STAPLES &d COMMON	FACE NAIL
	AT EACH &PLICE FACE YALL AT ENDS	3 - 3"&, 14 GAGE STAPLES 2 - &d COMMON	BULLT-UP GIRDER & BEAMS
	STAGGERED ON OPPOSITE SIDES FACE NAIL AT TOP & BOTTOM	3" 14 GAGE STAPLE @ 24" O/C 3"&d, 13" NAIL @ 24" OC &d COMMON 24" OC	BULLT-UP GIRDER & BEAMS
	1&" O/C 12" O/C 24" OC	3"&d, 13" NAIL 12" OC 24" OC	BULLT-UP JOINER STUDS
		3"&, 13" NAIL &d COMMON	EACH STUD & PLATE
		2 - 3"&, 13" NAIL 2 - 3"&, 13" NAIL	1" DIAGONAL BRACE TO
	TOENAIL	3 - 3"&, 13" NAIL 3 - &d COMMON	PARTNER TO PLATE
		3 - 3"&, 13" NAIL 3 - &d COMMON	SEE SECT. 2&06.10.1 TABLE 2&06.10.1)

NOTE: LETTER

NOTES	LOCATION	FASTENING	CONNECTION
SEE NOTE: F		4 - 3"&, 14 GAGE STAPLES 4 - 3"&, 13" NAIL	SEE SECT. 2&06.10.1, TABLE 2&06.10A)
COMMON NAIL - REF TO TABLE 2304.9.1	FACE NAIL	4 - 3"&, 14 GAGE STAPLES 4 - 3"&, 13" NAIL	4 - 3"&, 14 GAGE STAPLES 4 - 3"&, 13" NAIL
		3 - 16d COMMON 4 - 3"&, 13" NAIL	DELING JOISTS TO PARALLEL RAFTERS
	TOENAIL	4 - &d COMMON	CONTINUOUS HEADER TO STUD
COMMON NAIL - REF TO TABLE 2304.9.1	TOE NAIL	5 - 3"&, 14 GAGE STAPLE &- 3"&, 13" NAIL	CEILING JOISTS TO PLATE
	16" OC NLONG EDGE	16d COMMON	CONTINUOUS HEADER, 2 PCS.
	FACE NAIL	3 - 3"&, 14 GAGE STAPLES 2 - 16d COMMON	AND INTERSECTIONS TOP PLATES, LAPS
	TOE NAIL	3"&, 14 GAGE STAPLE @ 6" O/C 3"&d, 13" NAIL @ 6" O/C	RIM JOIST TO TOP PLATE
	TOE NAIL	3 - 3"&, 14 GAGE STAPLES 3 - 3"&, 13" NAIL	OR RAFTERS TO TOP PLATE BLOCKING BETWEEN JOISTS
	LAP SJ, OE	12 - 3" 1& GAGE STAPLE T/P, FACE NAIL 12 - 3"&, 13" NAIL & - 16d COMMON	DOUBLE TOP PLATES
	TYPICAL FACE NAIL	3" 14 GAGE STAPLE @ 12" OC 3"&d, 13" NAIL @ 12" OC 16d @ 16" OC	DOUBLE TOP PLATES
	FACE NAIL	3"&, 14 GAGE STAPLE @ 6" OC 3"&d, 13" NAIL @ 6" OC 16d @ 24" OC	DOUBLE STUDS
	END NAIL	3 - 3"&, 14 GAGE STAPLES 2 - 16d COMMON 3 - 3"&, 13" NAIL	STUD TO SOLE PLATE
	TOE NAIL	3 - 3"&, 14 GAGE STAPLES 4 - &d COMMON 4 - 3"&, 13" NAIL	
	END NAIL	3 - 3"&, 14 GAGE STAPLES 3 - 16d COMMON 4 - 3"&, 13" NAIL	TOP PLATE TO STUD
	BRACED WALL PANEL	3" 14 GAUGE STAPLE @ 12" O/C 3"&d, 13" NAIL @ 12" OC 16d @ 16" OC	AT BRACED WALL PANEL SOLE PLATE TO JOIST OR BLOCKING
	TYPICAL FACE NAIL	3" 14 GAUGE STAPLE @ 12" OC 3"&d, 13" NAIL @ 8" OC 16d @ 16" OC	OR BLOCKING SOLE PLATE TO JOIST
	TOENAIL EACH END	3 - 3"&, 14 GAGE STAPLES 3 - 3"&, 13" NAIL 3 - &d COMMON	BRIDGING TO JOIST
	TOENAIL	3 - 3"&, 14 GAGE STAPLES 3 - 3"&, 13" NAIL 3 - &d COMMON	JOIST OR SILL OR GIRDER

NOTES

A FOR 1/2 INCH SHEATHING & 1-1/4 INCH LENGTH FOR 25/32 INCH SHEATHING
B COMPRESSION-RESISTANT ROOFING NAILS W/ 7/16 INCH DIA. HEAD & 1-1 /4 INCH LENGTH
FASTENERS SPACED 3 INCHES OC AT EXTERIOR EDGES AND 6 INCHES OC AT INTERMEDIATE SUPPORTS
C COMPRESSION-RESISTANT STAPLES WITH NOMINAL 7/16 INCH CROWN AND 1-1/4 INCH LENGTH FOR
CORROSION-RESISTANT STAPLES WITH NOMINAL 7/16 INCH CROWN AND 1-1/4 INCH LENGTH FOR
D COMMON OR DEFORMED SHANK
E DEFORMED SHANK
F COMMON
G FASTENERS SPACED 3 INCHES OC AT EDGES & INCHES AT INTERMEDIATE SUPPORTS FOR SUBFLOOR AND
H FASTENERS SPACED 4 INCHES OC AT EDGES & INCHES AT INTERMEDIATE SUPPORTS FOR ROOF SHEATHING
I WALL SHEATHING AND 3 INCHES OC AT EDGES & INCHES AT INTERMEDIATE SUPPORTS FOR ROOF SHEATHING
J 1/2 INCH SHEATHING AND 1-1/2 INCH LENGTH FOR 25/32 INCH SHEATHING. FASTENERS SPACED
K CASING OR FINISH NAILS SPACED 6 INCHES ON PANEL EDGES, 12 INCHES AT INTERMEDIATE SUPPORTS.
L PANEL SUPPORTS AT 24 INCHES. CASING OR FINISH NAILS SPACED 6 INCHES ON PANEL EDGES, 12 INCHES AT INTERMEDIATE SUPPORTS.
M FOR ROOF SHEATHING APPLICATIONS, 8d NAILS ARE MINIMUM REQUIRED FOR WOOD STRUCTURAL PANELS
N STAPLES SHALL HAVE A MINIMUM CROWN WIDTH OF 7/16 INCH
O FOR ROOF SHEATHING APPLICATIONS, FASTENERS SPACED 4 INCHES ON CENTER AT EDGES, 8 INCHES AT INTERMEDIATE SUPPORTS.
P FASTENERS SPACED 4 INCHES OC AT EDGES, 8 INCHES AT INTERMEDIATE SUPPORTS FOR SUBFLOOR AND
WALL SHEATHING AND 3 INCHES OC AT EDGES, 6 INCHES AT INTERMEDIATE SUPPORTS FOR ROOF SHEATHING.

WALLS. REFER TO SECTION 2305. NAILS FOR WALL SHEATHING ARE PERMITTED TO BE COVERED BY OR LASING
SPANS ARE 48 INCHES OR MORE. FOR NAILING OF WOOD STRUCTURAL PANEL AND PARTICLEBOARD DIAPHRAMS, NO SHEAR
NAILS SPACED AT 3 INCHES ON CENTER AT EDGES (12 INCHES AT INTERMEDIATE SUPPORTS EXCEPT AT SUPPORTS, WHERE
COMMON BOX NAILS ARE PERMITTED TO BE USED EXCEPT WHERE OTHERWISE INDICATED