City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:		Phone:	W/ 31/50	Permit No:
Owner Address:	Lessee/Buyer's Name:	Ýhone:	Business		PERMIT ISSUED
Contractor Name:	Address:	Phone	:		Permit Issued: JUL 2 2 1999
Past Use:	Proposed Use:	COST OF WORK	ζ:	PERMIT FEE: \$ 30.00	JUL & & 1000
3 family		FIRE DEPT. A Signature:	Approved Denied	INSPECTION: Use Group \$2 Type \$ BOC \$496 Signature: The Local Section 1.	Zone: CBL:
Proposed Project Description: 6x14 deck replacing exis	iting rear pourch	PEDESTRIAN A Action: A I	Approved	S DISTRICT (PAD.) with Conditions:	Zoning Approval: Special Zone or Reviews: Shoreland Wetland Flood Zone
Permit Taken By: \$P	Date Applied For:	Signature:		Date:	□ Subdivision □ Site Plan maj □ minor □ mm □
2. Building permits do not include plu	not started within six (6) months of the date of				☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
			W	PERMIT ISSUED /ITH REQUIREMENTS	Historic Preservation Not in District or Landmark Does Not Require Review Requires Review Action:
authorized by the owner to make this ap if a permit for work described in the app	CERTIFICATION accord of the named property, or that the proposed oplication as his authorized agent and I agree to oblication is issued, I certify that the code official sonable hour to enforce the provisions of the control	o conform to all applicable I's authorized representati	e laws of th we shall hav	is jurisdiction. In addition	on, Defiled
SIGNATURE OF APPLICANT	ADDRESS:	July 12, 19 DATE:	99	PHONE:	
RESPONSIBLE PERSON IN CHARGE	OF WORK, TITLE			PHONE:	CEO DISTRICT
	White-Permit Desk Green-Assessor's C	anary-D.P.W. Pink-Pu	blic File	lvory Card-Inspector	

7/26/99 - Olere Colled for P/10/ Near Settrack) - Refered him quard Pails/ hendrails/ Treads &	COMMENTS Comments Comments Comments
100 Cottook - Rodered Sim	Margo S. @8695. Discurd forting / archas!
Que IP- Il be le Il trocks	Pises 1- no other Treation by owner,
Le Will Call B-4 Pareire Tule	1 - 7/26 - orner Called marge Johnwhil.
17/29/99- 1120/17 to site tubes and m	red structure has been reduced From original
in size gr	SECU CIRCUITO (INT) COOL (INDICATE)
- Size GIO	
	Inspection Record Type Date
	~J.F."
	Framing:
	Plumbing:
	Final:
	Other:

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building):	24 DESUMDSCORP ST	
Total Square Footage of Proposed Structure	60	oo saft
Tax Assessor's Chart, Block & Lot Number	Owner:	Telephone#:
Chart# 428 Block# L Lot#003	Zebert Low	871-0701
Owner's Addressfield Personnesset St Rolling, Mc 04103	Lessee/Buyer's Name (If Applicable)	Cost Of Work: Fee
Los Hand, ME O4103		\$ 500% \$30
Proposed Project Description:(Please be as specific as possible)	A 6'X14' DECK PERIOR	iva exsisting
Pent Dosch.		
Contractor's Name, Address & Telephone	<	Rec'd By
Current Use: 3 - fam	Proposed Use: Samo	
Separate permits are required	for Internal & External Plumbing, HVAC and Electrical insta	llation.

•All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. • All plumbing must be conducted in compliance with the State of Maine Plumbing Code.

•All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.

DEPT. OF BUILDING INSPECTION

CITY OF PORTLAND, ME

You must Include the following with you application:

1) ACopy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available

3) A Plot Plan/Site Plan

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to

enforce the provisions of the codes/applicable to this permi	ut.	
Signature of applicant:	Date: 7	انداوم

Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter. Additional Site review and related fees are attached on a separate addendum



Inspection Services Michael J. Nugent Manager Department of Urban Development Joseph E. Gray, Jr. Director

CITY OF PORTLAND




Building or Use Permit Application
Attached Single Family Dwellings/Two-Family Dwelling
Multi-Family or Commercial Structures and Additions Thereto

As an applicant for a building permit, you are about to enter into a relationship with our Office. We welcome any questions, comments or suggestions that will make the process more efficient. Attached you will find an application and some samples of the submissions you will provide at application time. Please read <u>ALL</u> of the information and if you need any further assistance please call 874-8703 or 874-8693.

Minor or Major site plan review will be required for the most of the above proposed projects.



Existing House

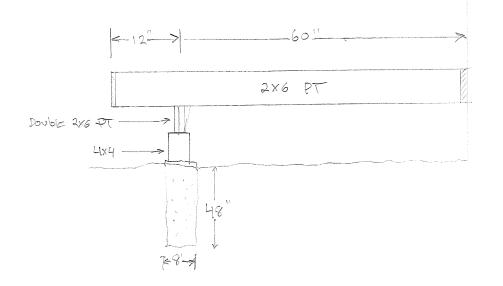

•
BUILDING PERMIT REPORT
DATE: 17 July 99 ADDRESS: 24 Presum pscott ST - CBL: 428-1-653
REASON FOR PERMIT: 10 TE PLATE OF THE PLATE
BUILDING OWNER: ROBER POOR
PERMIT APPLICANT:
USE, GROUP R. 2 BOCA 1996 CONSTRUCTION TYPE 5 B
CONDITION(S) OF APPROVAL
This permit is being issued with the understanding that the following conditions are met:
Approved with the following conditions: */ *// */3 *29 * 32 *34 # 3/
Refore concrete for foundation is placed, approvals from the Development to the second and the second approvals from the Development to the second approval
24 hour notice is required prior to inspection)
percent material that passes through a No. 4 steve. The trial shall extend the beauty and that the top of the drain is not
thickness shall be such that the bottom of the triain is not inspect that the bottom of the bottom of the triain is not inspect that the bottom of the bot
less than 6 inches above the top of the footing. The top of the footing of the fo
and the state of controlled filler membrate matched. The paper of
shall be protected with an approved meet interest and a shall be covered with not less than 6" of the same material. Section 1813.5.2 shall be covered with not less than 6" of the same material. Section 1813.5.2 shall be covered with not less than 6" of the same material. Section 1813.5.2
4. Foundations anchors shall be a minimum of 1/2 in diameter, 7 into me foundations
maximum 6' o.c. between bolts. (Section 2505.17)
5. Waterproofing and dampproofing shall be defined from freezing. Section 1908.0 6. Precaution must be taken to protect concrete from freezing. Section 1908.0 6. Precaution must be taken to protect concrete from freezing. Section 1908.0
It is strongly recommended that a registered rand surveyor check that 20 data
proper setbacks are maintained.
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 of 1-1 shall be oppositely spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating.
spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hoth interior spaces and the attic area by means of ½ inch - side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side.
Section 407.0 of the BOCA/1996) Section 407.0 of the BOCA National Mechanical
O All chimneys and vents shall be installed and maintained as per Chapter 12 of the Chyproline
Code/1993). Chapter 12 & NFFA 211
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 127.10 Sound transmission control in residential building shall be done in accordance with the sound transmission control in residential building shall be done in accordance with the sound transmission control in residential building shall be done in accordance with the so
numose of minimizing the possibility of an accidental tall from the structures,
except Use Group R which is 30°. In occupancies in 350 Storp 1727
open guards shall have balusters or be of solid material such that a sphere with a diameter of 4 cannot pass intough any open open guards shall have balusters or be of solid material such that a sphere with a diameter of 4 cannot pass intough any open open guards shall have an omamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group F not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group F not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group F not have an ornamental pattern that would provide a ladder effect.
not have an omamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 364 but no utside diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 3 shall not be less than 30", but not more than 38".) Handrails shall be on both sides of stairway. (Section 1014.7)
1/" and not greater than 2". (Sections 1021 & 1022.0) - Illimation 5
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0) 13. Stair construction in Use Group R-3 & R-4is a minimum of 10" trend and 7 ½" maximum rise. All other Use Group minimum 11" tread,
7" maximum rise. (Section 1014.0)
The minimum headroom in all parts of a stairway shall not be less than do meles. (a) The minimum headroom in all parts of a stairway shall not be less than do meles. (b) I we able to be operable window or exterior door
Every cleaning room below the fourth story in buildings of Ose Gloup's it may be accounted by owledge or separate tools.
annioved for emergency egress of rescue. The units must be approved for emergency egress of rescue. The units must be approved for emergency egress of rescue. The units must be approved for emergency egress of rescue. The units must be approved for emergency egress of rescue. The units must be approved for emergency egress of rescue.
Agrees of rescale Windows Hom steeping rooms shirt and the steeping rooms
egress or rescue windows from sleeping rooms shall have a minimum net clear opening neight dimension of 24 metals of 1018.6) minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6) minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
16 Fach anartment shall have access to two (2) septimes, remaining the second 1010 1)
from the apartment to the building extends with construction having a fire rating of at least one (1) hour, including fire doors with sent closer s.
Over 3 ctories in height requirements for mo many so the contraction of the contraction o
(Over 3 stones in legal requirements). The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic
18. The boiler shall be protected by enclosing with (1)hour fire rated construction including the doors and country.

exunguishment. (1able 302.1.1)

19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19.

1	
/	
/	installed and maintained at the following locations):
;	In the immediate vicinity of bedrooms
	 In all bedrooms
	• In each story within a dwelling unit, including basements
:	In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive
:	power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
20.	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
	(Section 921.0)
21.	The Fire Alarm System shall maintained to NFPA #72 Standard.
22.	The Sprinkler System shall maintained to NFPA#13 Standard.
23.	All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the
	City's Building Code. (The BOCA National Building Code/1996)
24.	Section 25-135 of the Municipal Code for the City of Portland states, 'No person or utility shall be granted a permit to excavate or open any
	street or sidewalk from the time of November 15 of each year to April 15 of the following year".
25.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a
	design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection
	Services.
26.	Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
27.	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all
-	electrical (min. 72 hours notice) and plumbing inspections have been done.
28.	All requirements must be met before a final Certificate of Occupancy is issued.
₹ 29.	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building
. 20	Code/1996). Variation of massay within a building shall be done in accordance with the Citate No. 1 in 10. 1 of 1 POCANY in 12.5 1 in 1.
30.	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
(21)	Disease and and implement the attached I and I so Zaning annot require the Newdeck Shall Not be closer to The PENY
31. 32.	Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements. Let the Than The old Porch, Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
33.	Glass and glazing shall meet the requirements of Chapter 24 of the building code.
¥ 34.	If The pier foundation is New The piers must rest on a footing!
A 37.	- 1 10 /FICE 100 10 10 10 10 10 10 10 10 10 10 10 10

Littles Building Inspector LittleDougall, PFD Marge Schmuckal, Zoning Administrator

PSH 12-14-98

3:5.

36.

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

16 2×2 PT 3/2 5/4"×6 PT Guardrai L LHandrai L FASTRES

•

Side Reg. 8 shows 22/8" CAN Not be closento Larryviod

Persumpscot ST

25 To sidewalte