


ROOF FRAMING PLAN

SCALE: 1/4"=1'-0"

NEW STRUCTURE EXISTING FRAMING REMOVED EXISTING STRUCTURE ┖┍╼╼╼╼╒╕┎╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼╼ -----_____ SLOPE 10:12 FLAT AREA SLOPE 6:12 _ _ _ _ _ _ _ ROOF PLAN



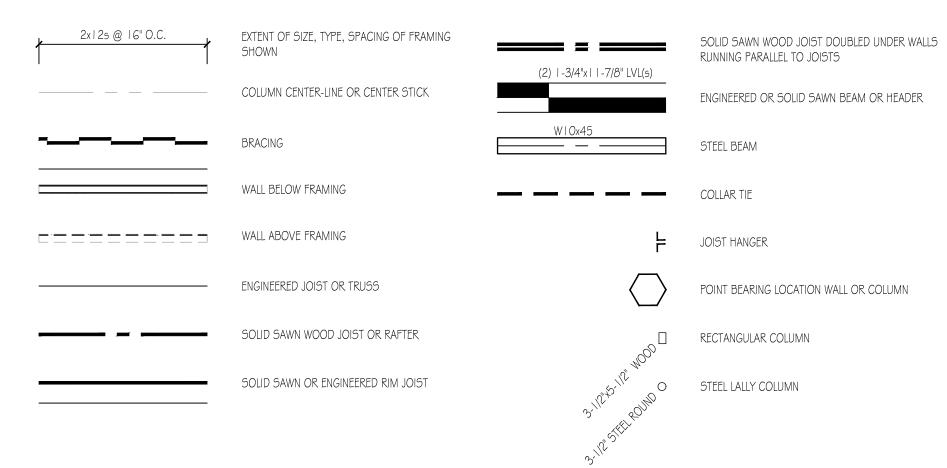

STRUCTURAL DESIGN CRITERIA:

1. Building Code: This Building is Designed to Comply with the 2009 Edition of the International Building Code IBC 2009. The 2005 Edition of ASCE-7, "Minimum Design Loads for Buildings and Other Structures.

2. Design Loads:

Wind Load (Per IBC Section 1609): Basic Wind Speed V = 110 MPHWind Exposure Factor = BImportance Factor I = 1.0Components and Cladding A. Net Design Wind Pressure For a Wall Element: I. at non-salient areas - Pnet = ± 25 psf 2. at salient areas - Pnet = ±29 psf Live Load: 50 PSF Plus Snow Drift Loading Where Applicable (Per Section 1608)

Snow Exposure Factor Ce = 1.0 Snow Thermal Factor Ct = 1.1 Importance Factor = 1.0

Dead Load: - 12 PSF Occupancy Category = II Soil Site Class 'D' I(E) = I.O

S(DS) = .326S(D1) = .115Seismic Design Category = B Basic Seismic Force Resisting System Light Framed Wall Systems Using Shear Panels.

- 12 PSF

1st Floor Area - 40 PSF 2nd Floor Area - 30 PSF

ALL DIMENSIONS AND CONDITIONS MUST BE VERIFIED IN THE FIELD. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER BEFORE PROCEEDING WITH THE AFFECTED PART OF THE WORK.

THE STRUCTURE IS DESIGNED TO BE SELF SUPPORTING AND STABLE AFTER THE BUILDING IS COMPLETE. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCE TO ENSURE SAFETY OF THE STRUCTURE AND PERSONNEL DURING ERECTION. THIS INCLUDES THE ADDITION OF THE NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS OR TIEDOWNS. SUCH MATERIAL SHALL REMAIN THE PROPERTY OF THE CONTRACTOR AFTER COMPLETION OF THE PROJECT.

ALL APPLICABLE FEDERAL, STATE, AND MUNICIPAL REGULATIONS SHALL BE FOLLOWED, INCLUDING THE FEDERAL DEPARTMENT OF LABOR OCCUPATIONAL SAFETY AND HEALTH ACT.

IT IS THE OWNER'S SOLE RESPONSIBILITY TO EMPLOY ONE OR MORE SPECIAL INSPECTORS (IF REQUIRED) TO PROVIDE INSPECTIONS IN COMPLIANCE WITH ALL APPLICABLE REQUIREMENTS OF IBC 2009.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATE DESIGN AND CONSTRUCTION OF ALL FORMS, SHORING AND TEMPORARY BRACING DURING THE PROGRESS OF THE PROJECT.

ALL STRUCTURAL STEEL WORK SHALL CONFORM TO THE RECOMMENDATIONS AND REQUIREMENTS CONTAINED IN THE "MANUAL OF STEEL CONSTRUCTION, ALLOWABLE STRESS DESIGN", AISC NINTH EDITION (INCLUDING AISC CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES), AND "STRUCTURAL STEEL WELDING CODE - STEEL", (AWS DI.I, LATEST EDITION).

STRUCTURAL STEEL ROLLED SHAPES, PLATES AND BARS SHALL CONFORM TO THE FOLLOWING: a) ASTM A992, GRADE 50: ALL WIDE FLANGE SECTIONS, FY=50 b) ASTM A36: OTHER ROLLED SHAPES, PLATES AND BARS, FY=36 ASTM A36: THREADED AND OTHER STEEL RODS

First Floor Header Schedule							
Opening Size	Location	Gırder	Number of	Number of			
		Members	Members	Jack Studs			
0" to 3'-6"	Exterior Wall	2x6s	2	2			
3'-6" to 4'-6"	Exterior Wall	2x8s	2	2			
4'-6" to 5'-6"	Exterior Wall	2x10s	2	2			
5'-6" to 6'-6"	Exterior Wall	2x12s	2	2			
6'-6" to 8'-0"	Exterior Wall	2x12s	3	2			
0" to 3'-6"	Interior Wall	2x6s	2	2			
3'-6" to 5'-0"	Interior Wall	2x8s	2	2			
5'-0" to 6'-0"	Interior Wall	2x10s	2	2			
6'-0" to 7'-0"	Interior Wall	2x12s	2	2			
7'-0" to 8'-0"	Interior Wall	2x12s	3	2			
	Second Flo	or Header	Schedule				

Opening Size	Location	Gırder	Number of	Number of	
		Members	Members	Jack Studs	
0" to 4'-0"	Exterior Wall	2x6s	2	2	
4'-0" to 5'-0"	Exterior Wall	2x8s	2	2	
5'-0" to 6'-0"	Exterior Wall	2x10s	2	2	
6'-0" to 7'-0"	Exterior Wall	2x12s	2	2	
7'-0" to 8'-0"	Exterior Wall	2x12s	3	2	
0" to 3'-6"	Interior Wall	2x6s	2	2	
3'-6" to 5'-0"	Interior Wall	2x8s	2	2	
5'-0" to 6'-0"	Interior Wall	2x10s	2	2	
6'-0" to 7'-0"	Interior Wall	2x12s	2	2	

NOTE:

THE CONTRACTOR/OWNER ASSUMES ALL RESPONSIBILITY
FOR LOCAL CODE COMPLIANCE.
ALL DRAWINGS, PLANS, SKETCHES ETC. ARE PROVIDED TO OUR
CLIENTS BASED UPON INFORMATION PROVIDED BY THE CLIENT
AND DRAWN IN ACCORDANCE WITH COMMON BUILDING PRACTICES
AND LOCAL CODES. NONE OF THE EMPLOYEES OF CDT
ARE NOT REGISTERED ARCHITECTS, ENGINEERS OR LAND


BY CLIENT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS. IF DIMENSIONS AND SPECIFICATIONS ARE NOT VERIFIED BY CLIENT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS CDT WILL BE HELD HARMLESS
CDT ASSUMES NO LIABILITY FOR CHANGES
AND/OR REVISIONS MADE TO PLANS BY CLIENT AND/OR CONTRACTOR.

7'-0" to 8'-0" Interior Wall 2x | 2s

- SURVEYORS, ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED

 I. Contractor/owner responsible for securing all necessary permits.
 - 2. Contractor/owner will Comply with all applicable codes and ordinances.
 - 3. Contractor/owner to verify all site grades and dimensions.





Building Addition 522 Washington Ave Schneider Property

			П)			
	ВУ	JJO	JJO				
	NO REMARKS	ISSUED FOR PERMIT	ISSUED FOR PERMIT	MODIFIED ROOF FRAMING			
	ON	Α	В	ပ			
	DATE	09-24-15	05-23-16	09-18-16			
	CODE:			IRC	20	96	
	TOWN				POR	RTLA	ΝI
	DA	TE:	•		09-	24-	15
	sc	ALI	E:		As	No	te

ROOF & ROOF FRAMING PLANS

FILE: SHEET: A1-05

DRAWN:

TITLE: