OCCUPANCY SENSOR SCHEDULE

TYPE	DESCRIPTION	SENSOR TECHNOLOGY	SENSOR VOLTAGE	MANUFACTURER (OR APPROVED EQUAL)			NOTES
				SENSOR	POWER PACK	COVERAGE AREA	
$\bigcirc_1$	WALL SWITCH SENSOR: SINGLE CIRCUIT W/ MANUAL CONTROL AND SELF ADAPTIVE TECHNOLOGY	PASSIVE INFRARED & ULTRASONIC	LINE	HUBBELL #LHMTS1	N/A	56'x50'	PROGRAM FOR AUTO ON, AUTO OFF AFTER 20 MINUTES
$\bigcirc_2$	CEILING MOUNT SENSOR	PASSIVE INFRARED	LINE	HUBBELL #LHATSI	N/A	56'x50'	PROGRAM FOR AUTO ON, AUTO OFF AFTER 2 MINUTES
$\bigcirc_3$	CEILING MOUNT SENSOR W/ SELF ADAPTIVE TECHNOLOGY	PASSIVE INFRARED & ULTRASONIC	LOW	HUBBELL #OMNIDT2000RP	MP POWER PACK	45'x45'	PROVIDE WITH RELAY CONTACTS FOR HVAC CONTROLS SYSTEM USE. AUTO OFF AFTER 20 MINUTES

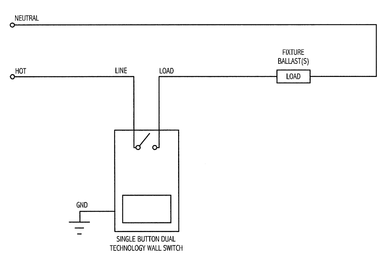

E1 OCCUPANCY SENSOR DIAGRAM
TYPE 1 SINGLE LEVEL SWITCHING $\bigcirc_1$

NOT TO SCALE



E5 OCCUPANCY SENSOR DIAGRAM
TYPE 2 DUAL LEVEL SWITCHING $\bigcirc_2$

NOT TO SCALE

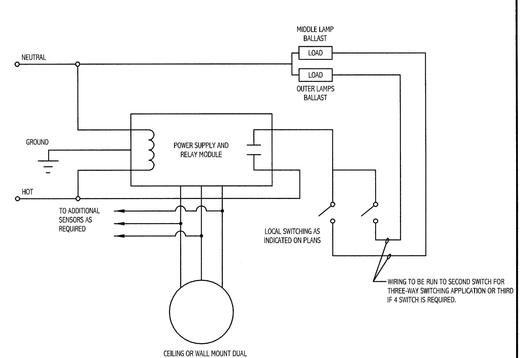

A1 OCCUPANCY SENSOR DIAGRAM
TYPE 3 DUAL LEVEL SWITCHING $\bigcirc_3$

NOT TO SCALE

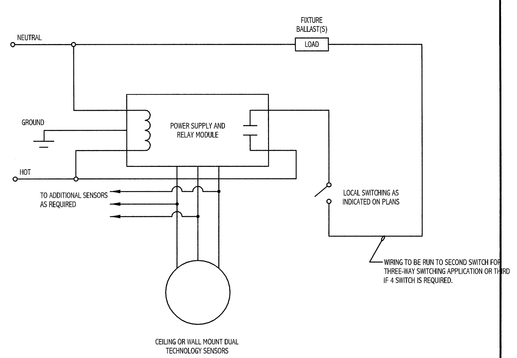

A5 OCCUPANCY SENSOR DIAGRAM
TYPE 3 SINGLE LEVEL SWITCHING $\bigcirc_3$

NOT TO SCALE

LIGHT FIXTURE SCHEDULE

TYPE	DESCRIPTION	MANUFACTURER	LAMPS	MOUNTING	NOTES
A	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F24T5 3500K	CEILING RECESSED	PROVIDE W/ STEP DIMMING BALLAST (.95 BF)
AE	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F24T5 3500K	CEILING RECESSED	PROVIDE W/ STEP DIMMING BALLAST (.95 BF) AND 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
A1	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F24T5 3500K	CEILING RECESSED	PROVIDE W/ STEP DIMMING BALLAST (1.15 BF)
A1E	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F24T5 3500K	CEILING RECESSED	PROVIDE W/ STEP DIMMING BALLAST (1.15 BF) AND 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
B	2'x4' SPECIFICATION GRADE RECESSED TROFFER W/ PATTERN A12 ACRYLIC LENS 120/277V	COLUMBIA 4PS SERIES	2-F28T5 3500K	CEILING RECESSED	
B1	2'x2' SPECIFICATION GRADE RECESSED TROFFER W/ PATTERN A12 ACRYLIC LENS 120/277V	COLUMBIA 4PS SERIES	2-F14T5 3500K	CEILING RECESSED	
B2	2'x2' SPECIFICATION GRADE RECESSED TROFFER W/ PATTERN A12 ACRYLIC LENS. UL LISTED FOR DAMP LOCATION 120/277V	COLUMBIA 4PS SERIES	2-F14T5 3500K	CEILING RECESSED	
C	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F28T5 3500K	CEILING RECESSED	
CE	2x4 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F28T5 3500K	CEILING RECESSED	PROVIDE W/ 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
C1	2x2 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F14T5 3500K	CEILING RECESSED	
C1E	2x2 HIGH EFFICIENCY RECESSED FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F14T5 3500K	CEILING RECESSED	PROVIDE W/ 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
C2	2x4 HIGH EFFICIENCY SURFACE FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F28T5 3500K	CEILING SURFACE	
C2E	2x4 HIGH EFFICIENCY SURFACE FIXTURE W/ OPAL ACRYLIC SHIELDING 120/277V	COLUMBIA EPC24-2 SERIES	2-F28T5 3500K	CEILING SURFACE	PROVIDE W/ 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
D	8" COMPACT FLUORESCENT DOWNLIGHT WITH SPECULAR CLEAR ALZAK REFLECTOR AND ELECTRONIC BALLAST.	PRESCOLITE CFT8 SERIES	2-26W TRIPLE TUBE 3500K	CEILING RECESSED	
DE	8" COMPACT FLUORESCENT DOWNLIGHT WITH SPECULAR CLEAR ALZAK REFLECTOR AND ELECTRONIC BALLAST. 120/277V	PRESCOLITE CFT8 SERIES	2-26W TRIPLE TUBE 3500K	CEILING RECESSED	PROVIDE W/ 2-LAMP EMERGENCY BATTERY BALLAST W/ SELF-TESTING DIAGNOSTICS
D1	8" COMPACT FLUORESCENT DOWNLIGHT WITH SPECULAR CLEAR ALZAK REFLECTOR AND ELECTRONIC BALLAST. 277V	PRESCOLITE CFT8 SERIES	2-26W TRIPLE TUBE 3500K	CEILING RECESSED	PROVIDE W/ ELECTRONIC DIMMING BALLAST DIMMABLE TO 5%
D2	6" COMPACT FLUORESCENT OPEN APERTURE WALL WASH WITH SPECULAR CLEAR ALZAK REFLECTOR AND ELECTRONIC BALLAST 120/277V	PRESCOLITE CFT6 SERIES	1-26W TRIPLE TUBE	CEILING RECESSED	
D3	6" LED OPEN APERTURE DOWNLIGHT W/ SPECULAR FINISH AND TRIM RING GASKET 120/277V	PRESCOLITE D4LED SERIES	(10)1WATT LED 5500K	RECESSED IN CANOPY	COORDINATE INSTALLATION W/ CANOPY DETAILS AND STRUCTURE.
F	6" COMPACT FLUORESCENT WALL WASH WITH SPECULAR CLEAR ALZAK REFLECTOR AND ELECTRONIC BALLAST 120/277V	PRESCOLITE CFT6 SERIES	1-32W TRIPLE TUBE 3500K	CEILING RECESSED	
G	4' INDIRECT/DIRECT WALL BRACKET W/ OPAL LENS, EMERGENCY BALLAST, AND ULTRASONIC OCCUPANCY SENSOR 120/277V	LUMAX CDD SERIES	2-F32T8 3500K	WALL MOUNT	MOUNT 7'6" AFF IN STAIRWELLS. COORD. W/ ARCHITECTURAL.
H	4' INDUSTRIAL REFLECTOR W/ MINIMUM 10% UPLIGHT. PROVIDE W/ WIRE GUARD 120/277V	COLUMBIA KL SERIES	2-F28T5 3500K	SURFACE/ CHAIN HUNG 7'-6" AFF	
H1	4' FLUORESCENT SLIM WALL MOUNT FIXTURE 120/277V	COLUMBIA W SERIES	1-F28T5 3500K	SURFACE WALL MOUNT ABOVE CLOSET DOOR	
J	8" APERTURE VERTICAL LAMP LENSED METAL HALIDE DOWNLIGHT W/ UL LISTING FOR WET LOCATION. 120/277V	PRESCOLITE RHD8 SERIES	1-70W METAL HALIDE	CEILING RECESSED	
K	PARKING STRUCTURE LIGHT FIXTURE W/ BIRD SHROUD. PROVIDE W/ 15W QUARTZ RESTRIKE 120/277V	KIM PGL4 SERIES	1-175W METAL HALIDE	22" PENDANT MOUNT	
K1	PARKING STRUCTURE LIGHT FIXTURE W/ BIRD SHROUD. PROVIDE W/ 15W QUARTZ RESTRIKE 120/277V	KIM PGL4 SERIES	1-175W METAL HALIDE	22" PENDANT MOUNT	
L	PARKING STRUCTURE LIGHT FIXTURE W/ BIRD SHROUD. PROVIDE W/ 15W QUARTZ RESTRIKE 120/277V	KIM PGL4 SERIES	1-175W METAL HALIDE	CEILING SURFACE	
L1	PARKING STRUCTURE LIGHT FIXTURE W/ BIRD SHROUD. PROVIDE W/ 15W QUARTZ RESTRIKE 120/277V	KIM PGL4 SERIES	1-175W METAL HALIDE	CEILING SURFACE	
M	NONMETALLIC INCANDESCENT VAPORTITE JELLY JAR FIXTURE W/ STANDARD GLASS GLOBE & GUARD 120V	HUBBELL N/V SERIES	1-25W MED. BASE CFL 3500K	WALL MOUNT 60" AFF	
M1	NONMETALLIC INCANDESCENT VAPORTITE JELLY JAR FIXTURE W/ HEAT RESISTANT GLASS GLOBE & GUARD 120V	HUBBELL N/V SERIES	100W A-12 ROUGH SERVICE	WALL MOUNT 60" AFF	
N	4' FLUORESCENT NARROW STRIP FIXTURE W/ ASSYMETRIC REFLECTOR 120/277V	COLUMBIA CN SERIES	1-F28T5 3500K	SURFACE	INSTALL IN ARCHITECTURAL SOFFIT. COORDINATE W/ ARCH. PLANS.
N1	2' FLUORESCENT NARROW STRIP FIXTURE W/ ASSYMETRIC REFLECTOR 120/277V	COLUMBIA CN SERIES	1-F14T5 3500K	SURFACE	INSTALL IN ARCHITECTURAL SOFFIT. COORDINATE W/ ARCH. PLANS.
	SINGLE FACE LED EXIT SIGN. RED LETTERS W/ WHITE HOUSING AND BRUSHED ALUMINUM FACE. PROVIDE W/ MAINTENANCE FREE BATTERY AND SELF TESTING DIAGNOSTICS. 120/277V	CORNER STONE DURAMAX SERIES	LED	CEILING OR WALL 6" BELOW CEILING	
	DUAL FACE LED EXIT SIGN. RED LETTERS W/ WHITE HOUSING AND BRUSHED ALUMINUM FACE. PROVIDE W/ MAINTENANCE FREE BATTERY AND SELF TESTING DIAGNOSTICS. 120/277V	CORNER STONE DURAMAX SERIES	LED	CEILING OR WALL 6" BELOW CEILING	
	EMERGENCY LIGHTING UNIT W/ MAINTENANCE FREE BATTERY AND SELF TESTING DIAGNOSTICS 120/277V	PRESCOLITE N/V SERIES	2-5.4W HALOGEN	WALL 6" BELOW CEILING	PROVIDE W/ CAPACITY FOR ADDITIONAL 2-5.4W REMOTE HEADS

NOTE:

1. SEE GI001 FOR PROJECT GENERAL NOTES
2. SEE SHEET E-001 FOR LEGEND AND GENERAL NOTES.

REV.	DESCRIPTION	DATE

ISSUED FOR G.M.P. & PERMITTING
4-3-09

CURRENT ISSUE STATUS:

PROJECT NORTH

SMRT
ARCHITECTURE
ENGINEERING
PLANNING
INTERIOR DESIGN
COMMISSIONING
144 Fore Street,P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-1070
www.smrtinc.com

MARTIN'S POINT HEALTH CARE
MEDICAL OFFICE BUILDING
PORTLAND, MAINE

LIGHTING FIXTURE SCHEDULE

SHEET TITLE:

SCALE:	NONE	DATE:	
PROJECT MANAGER:	SLB	GRAPHIC SCALE:	0" 1"
JOB CAP/DRAWN:	TCM/CDS		
A/E OF RECORD:	DIT	SHEET No.	
SMRT CAD FILE:	EL601-08139	EL601	
PROJECT No.	08139		

©COPYRIGHT 2008 SMRT INC

PROGRESS PRINT