




1 BITUMINOUS PAVEMENT - DRIVEWAY  
NOT TO SCALE

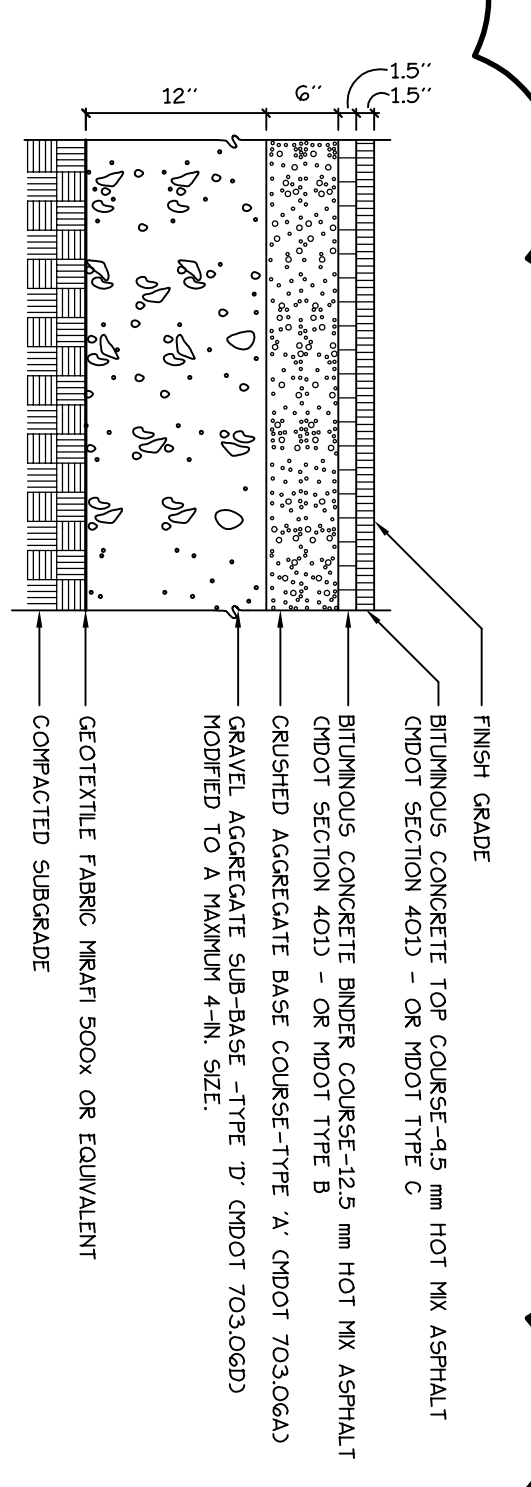


2 BITUMINOUS PAVEMENT - GARAGE  
NOT TO SCALE

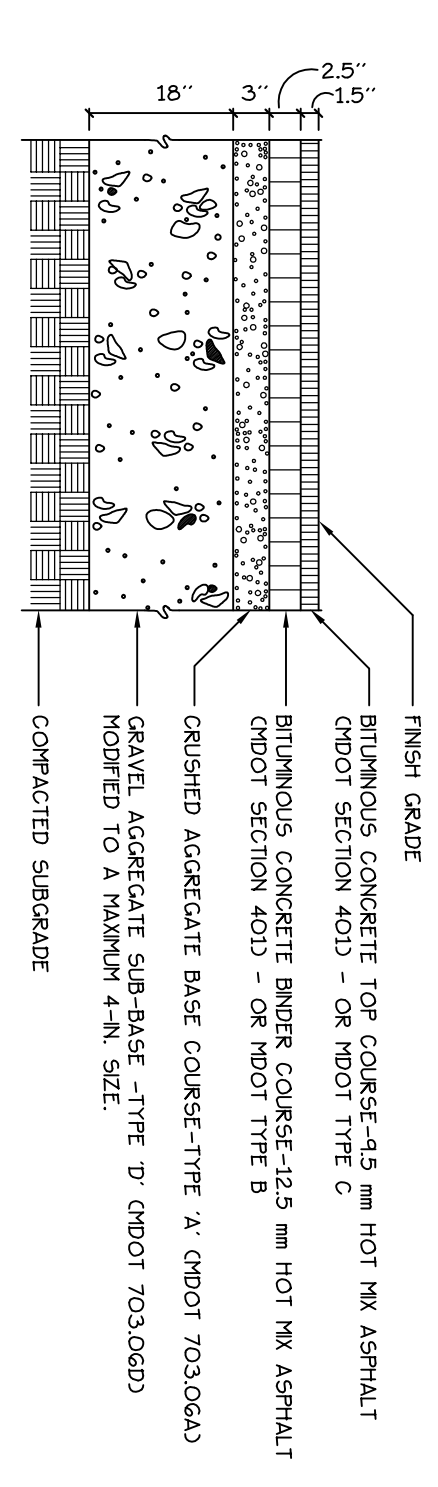


3 BITUMINOUS PAVEMENT - PUBLIC RIGHT-OF-WAY  
NOT TO SCALE

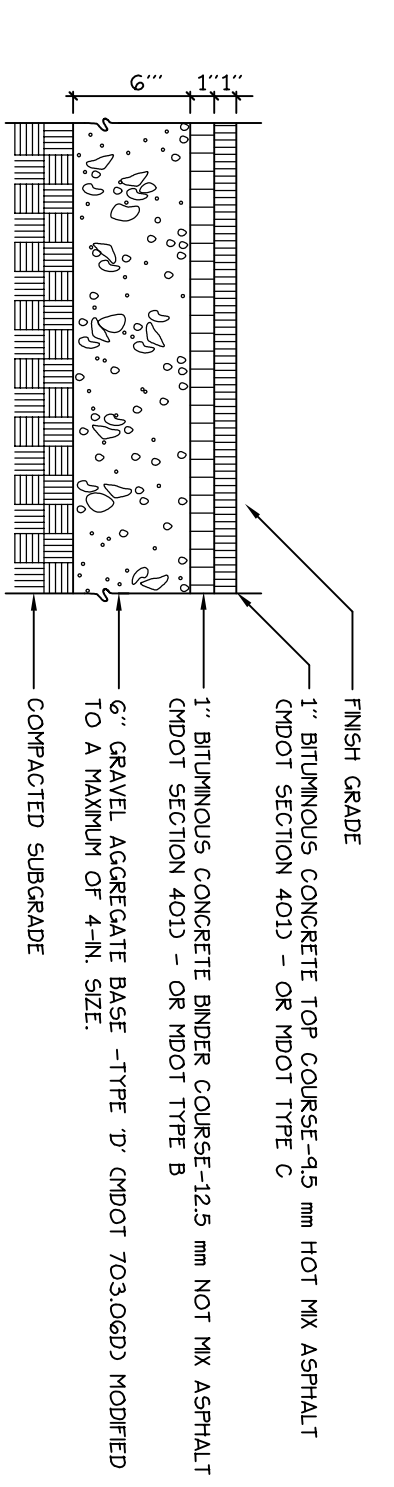


4 BITUMINOUS SIDEWALK  
NOT TO SCALE

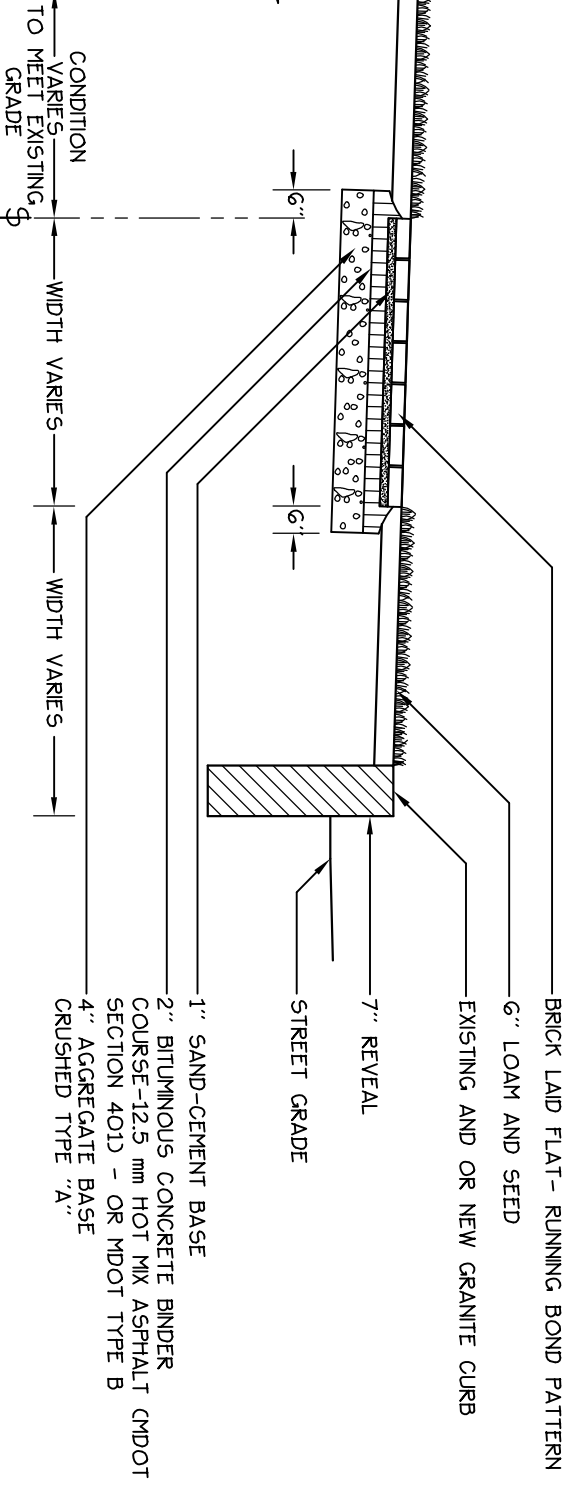


5 BRICK SIDEWALK WITH ESPLANADE AND GRANITE CURB  
NOT TO SCALE

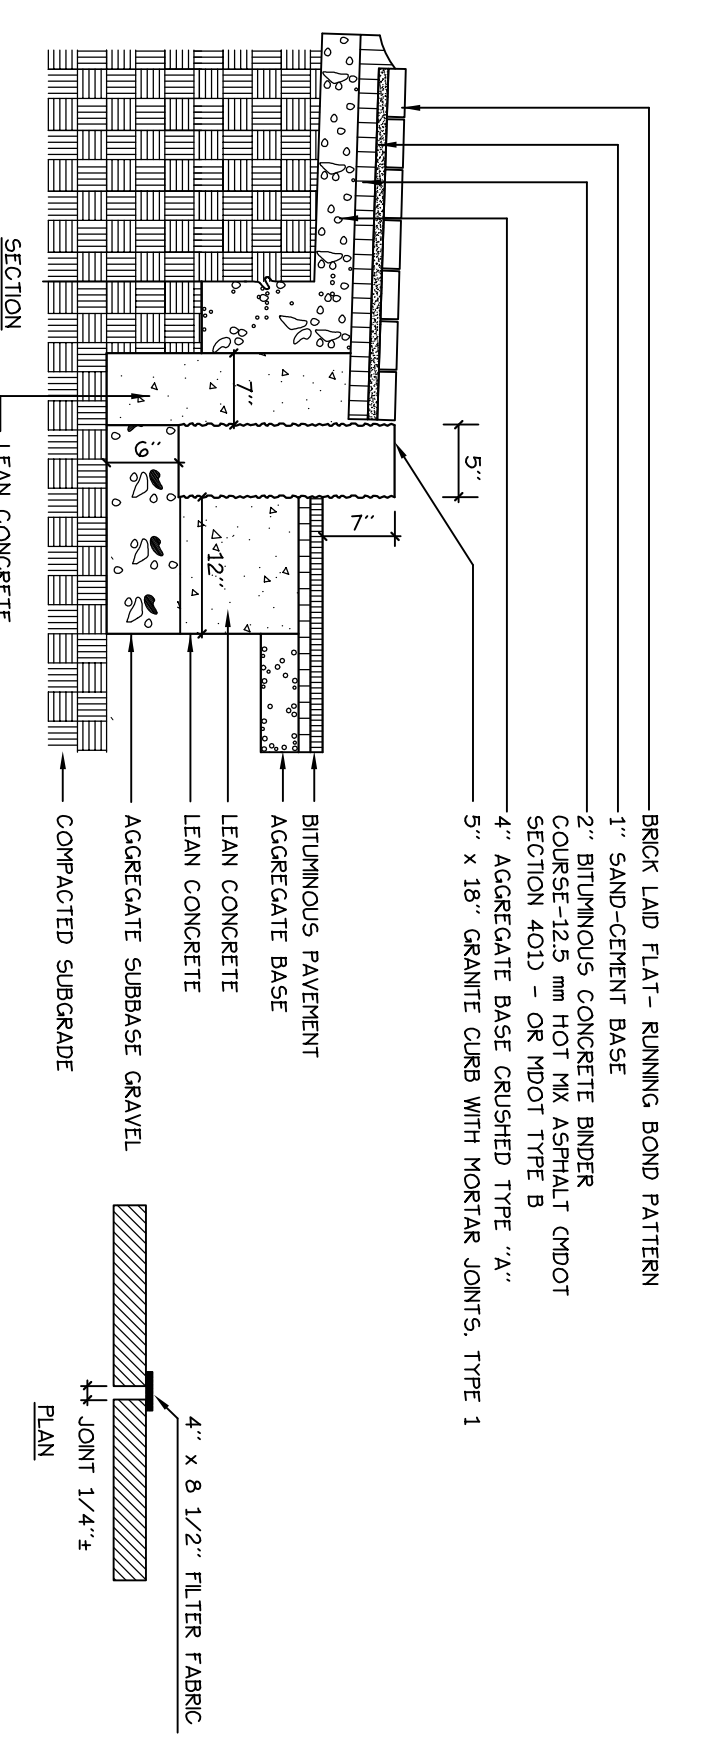


6 BRICK SIDEWALK WITH GRANITE CURB  
NOT TO SCALE

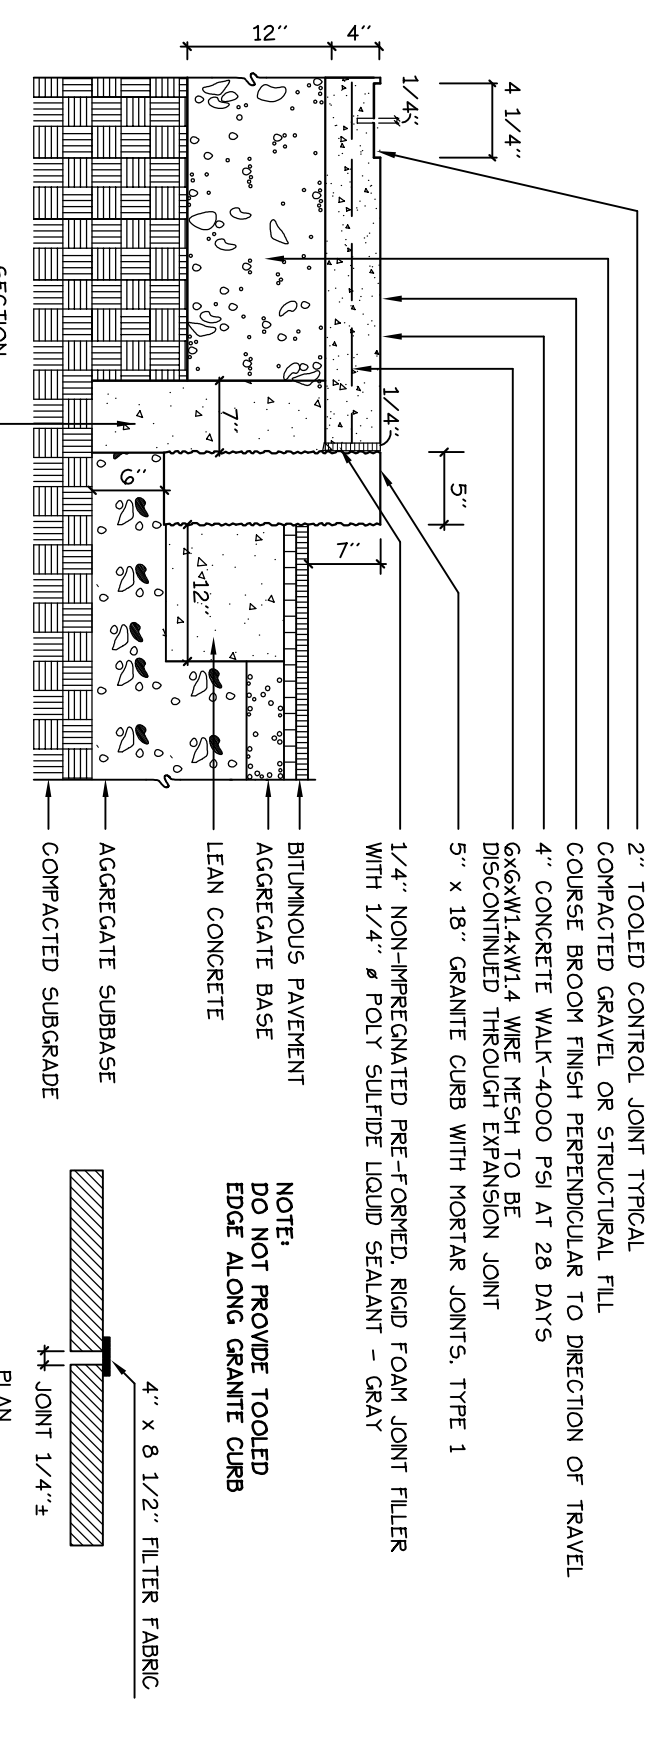


7 VERTICAL GRANITE CURB AND CONCRETE SIDEWALK  
NOT TO SCALE

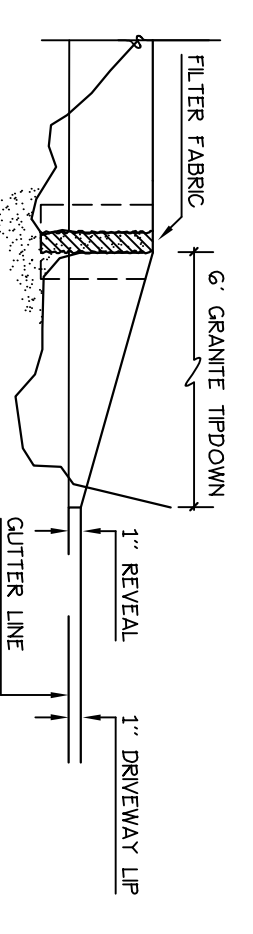


8 TIPDOWN CURB  
NOT TO SCALE

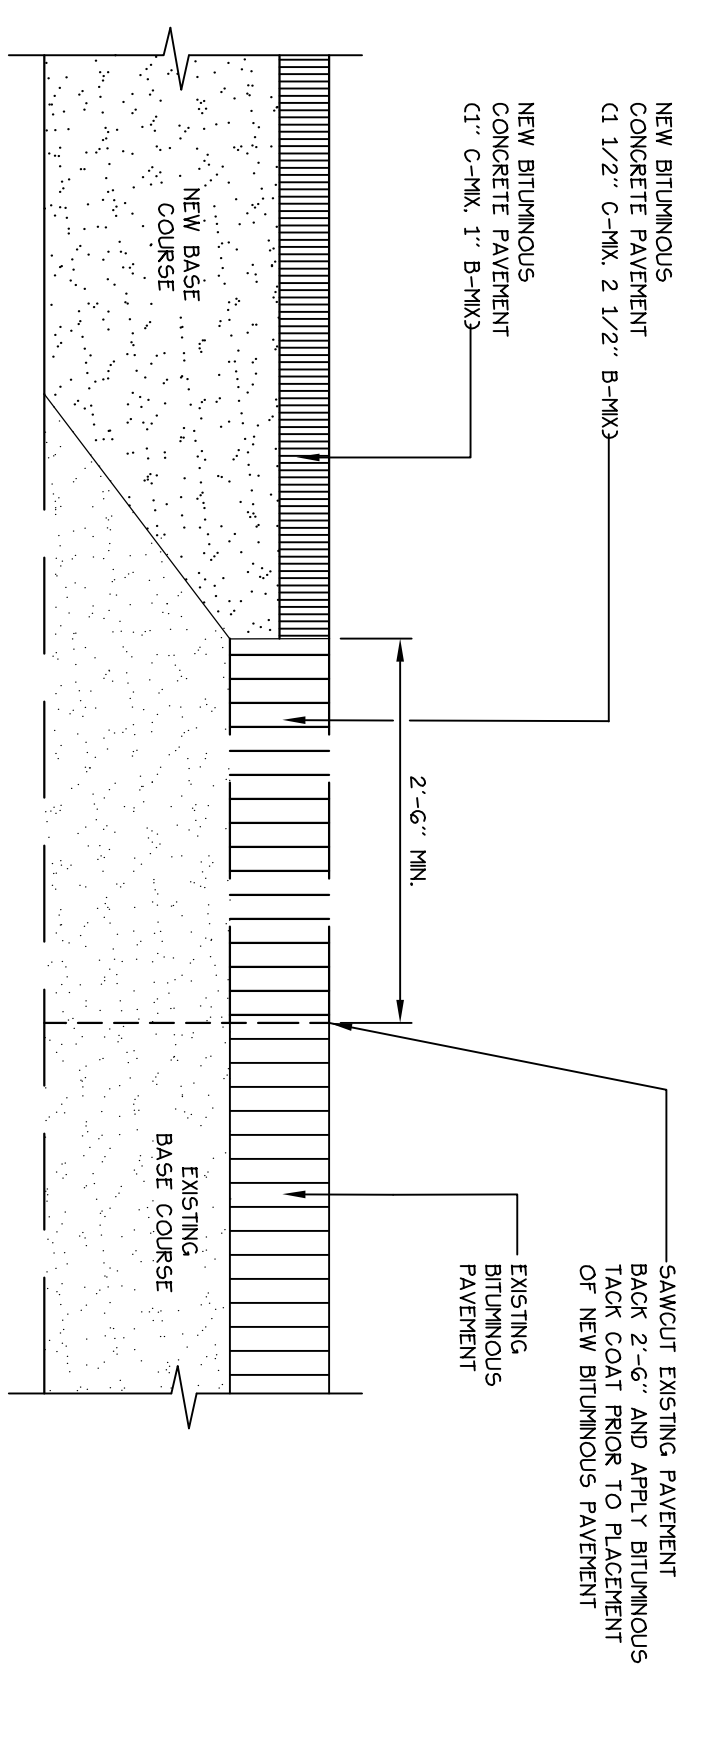

9 PAVEMENT SAWCUT IN STREET DETAIL  
NOT TO SCALE

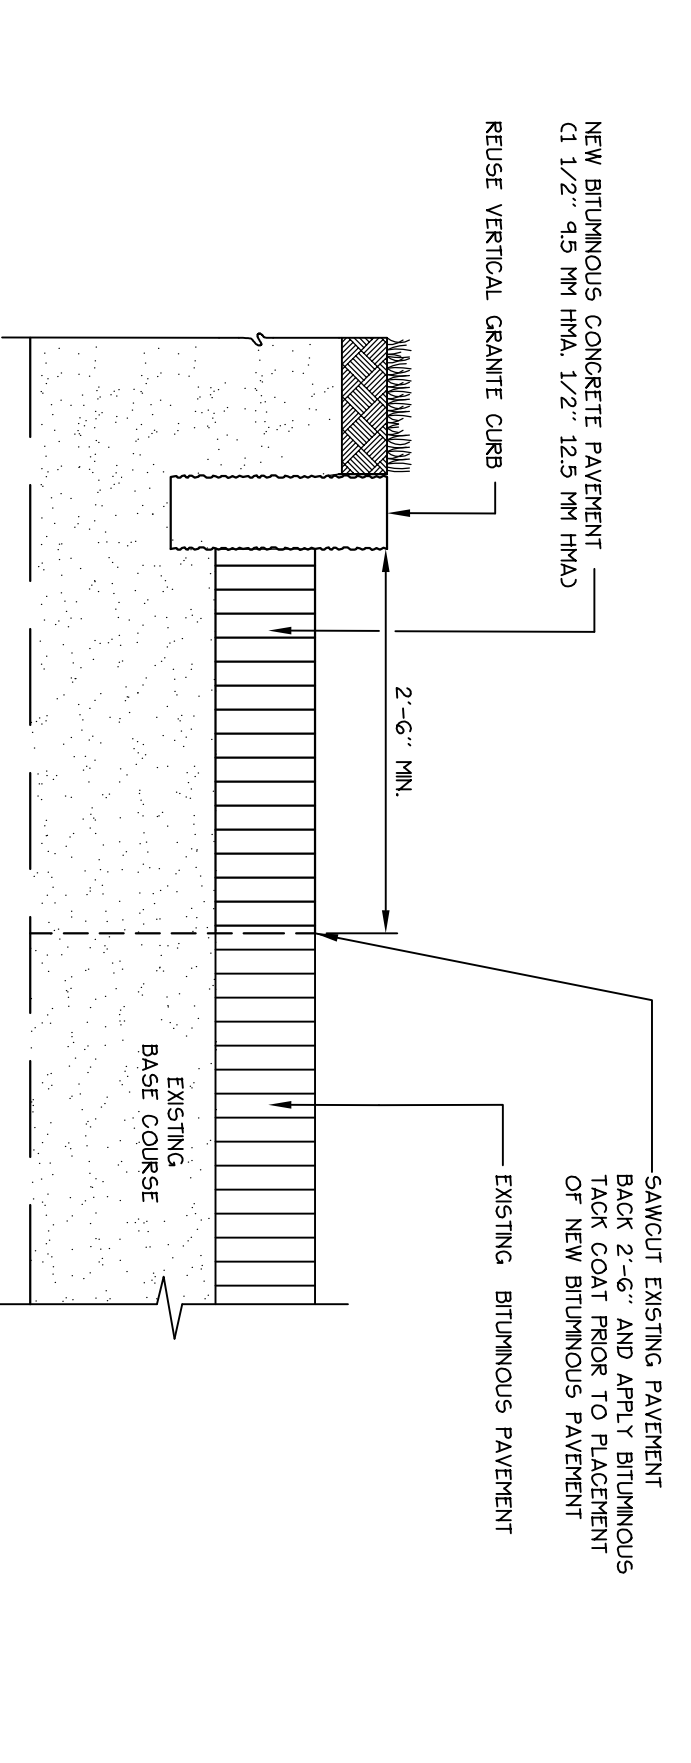


10 PAVEMENT SAWCUT AT CURB DETAIL  
NOT TO SCALE

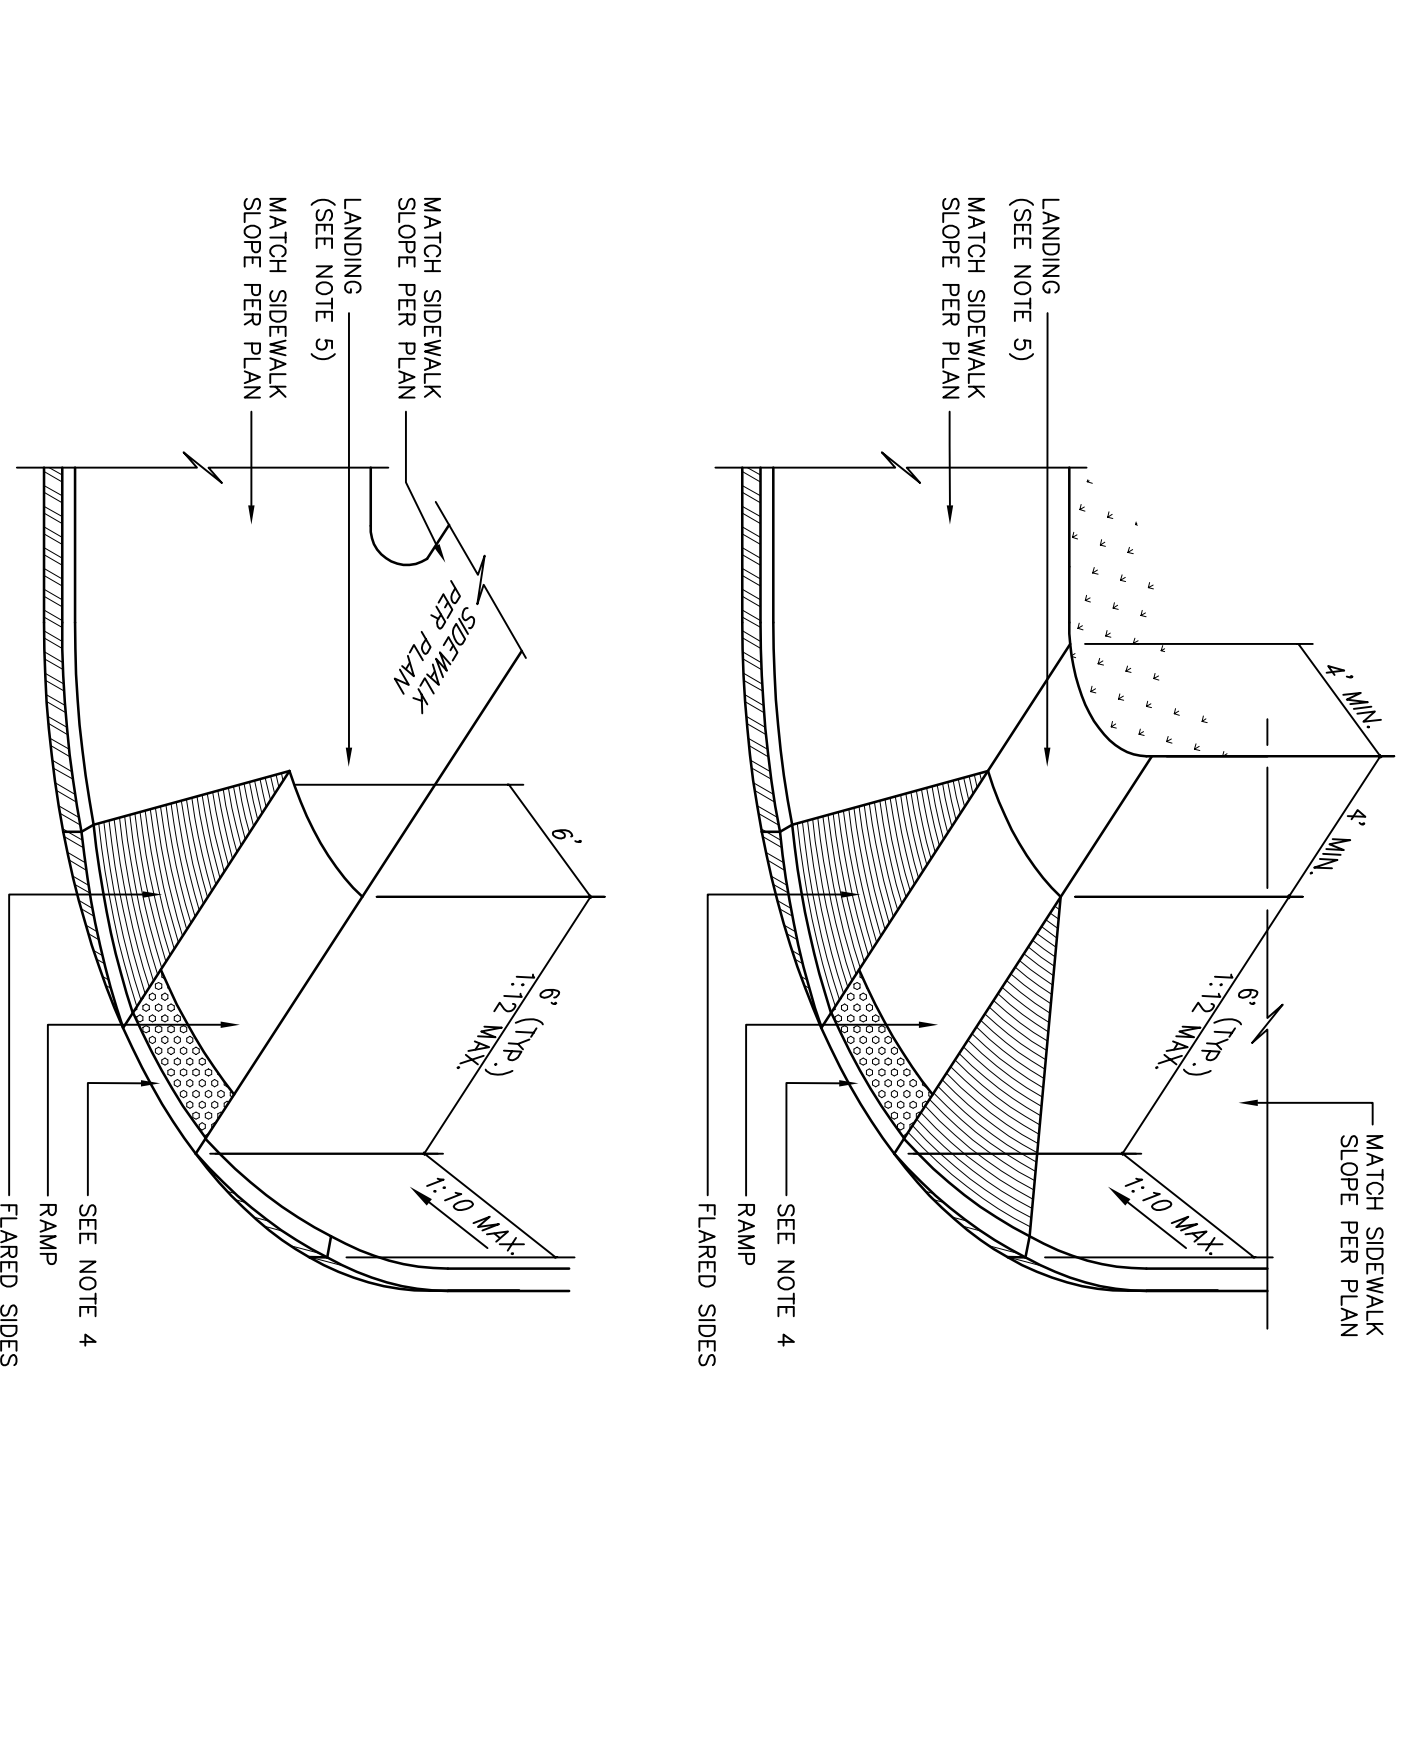


NOTE:

- CURB RAMP LENGTHS ARE BASED ON SIX (6) FOOT CURB REVEAL HEIGHT AND NO RUNNING SLOPE. RAMP LENGTHS SHALL BE ADJUSTED TO MAINTAIN A MINIMUM RAMP SLOPE OF 1:12.
- DETECTABLE WARNINGS SHALL CONSIST OF RAISED TRUNCATED DOWNS AND SHALL HAVE A BASE DIAMETER OF 0.8 INCHES (23 mm) MINIMUM AND A HEIGHT OF 0.2 INCHES (5.1 mm). A CENTER-TO-CENTER SPACING OF 16 INCHES (414mm) MINIMUM AND 24 INCHES (610mm) MAXIMUM, AND A BASE-TO-BASE SPACING OF 0.65 INCHES (16.51mm) MINIMUM, MEASURED BETWEEN THE HIGHEST ADJACENT DOWNS ON A SQUARE GRID.
- DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJACENT SURFACES, EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT. THE MATERIAL USED TO PROVIDE CONTRAST SHALL BE AN INTEGRAL PART OF THE WALKING SURFACE. DETECTABLE WARNINGS USED ON INTERIOR SURFACES SHALL DIFFER FROM ADJACENT WALKING SURFACES IN RESISTOR OR SOUND-ON-COLOR CONTRAST.
- ALL ACCESSIBLE ROUTE SIDEWALKS INTERSECTING DRIVEWAYS, DRIVEWAYS, OR OTHER VERTICAL CROSSINGS REQUIRE DETECTABLE WARNINGS. DETECTABLE WARNINGS SHALL BE INSTALLED SIX (6) FEET ON EITHER SIDE OF THE HORIZONTAL PROGRESS OF THE ADJACENT DRIVEWAY, DRIVEWAY, OR OTHER VERTICAL CROSSING. DETECTABLE WARNINGS SHALL BE INSTALLED IN THE RAMP LANDING OR SIDEWALK OR RAMP AREA. DETECTABLE WARNINGS SHALL CONFORM TO THE SLOPE REQUIREMENTS OF THE RAMP LANDING OR SIDEWALK OR RAMP AREA. DETECTABLE WARNINGS SHALL NOT BE INSTALLED IN FLARED SIDES, IF THE RAMP INCLUDES FLARED SIDES.
- ALL LANDING AREAS SHALL BE 4 FEET WIDE BY 4 FEET LONG (MINIMUM DIMENSIONS). THE SLOPE OF THE LANDING AREA SHALL NOT EXCEED A 1:48 IN ANY DIRECTION.
- ALL ACCESSIBLE ROUTE SLOPES ADJACENT TO THE LANDING AREA EXCLUDING THE CURB RAMP SHALL NOT EXCEED A SLOPE OF 1:20 UNLESS OTHERWISE NOTED.

11 BARRIER FREE RAMP  
NOT TO SCALE

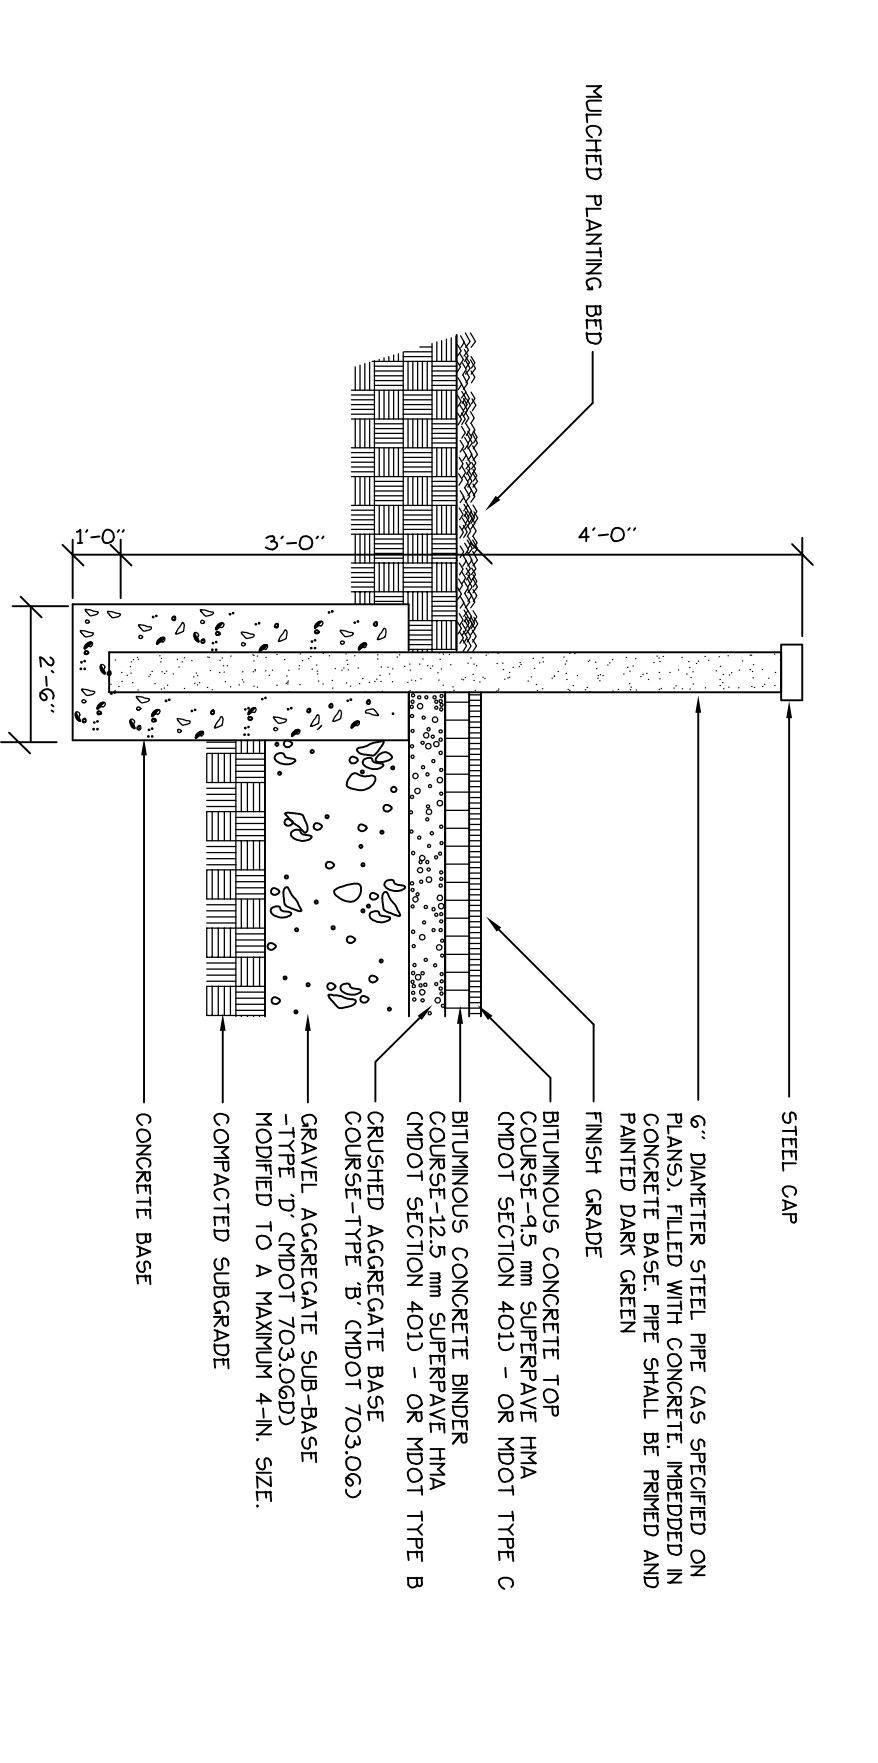

12 BOLLARD DETAIL  
NOT TO SCALE

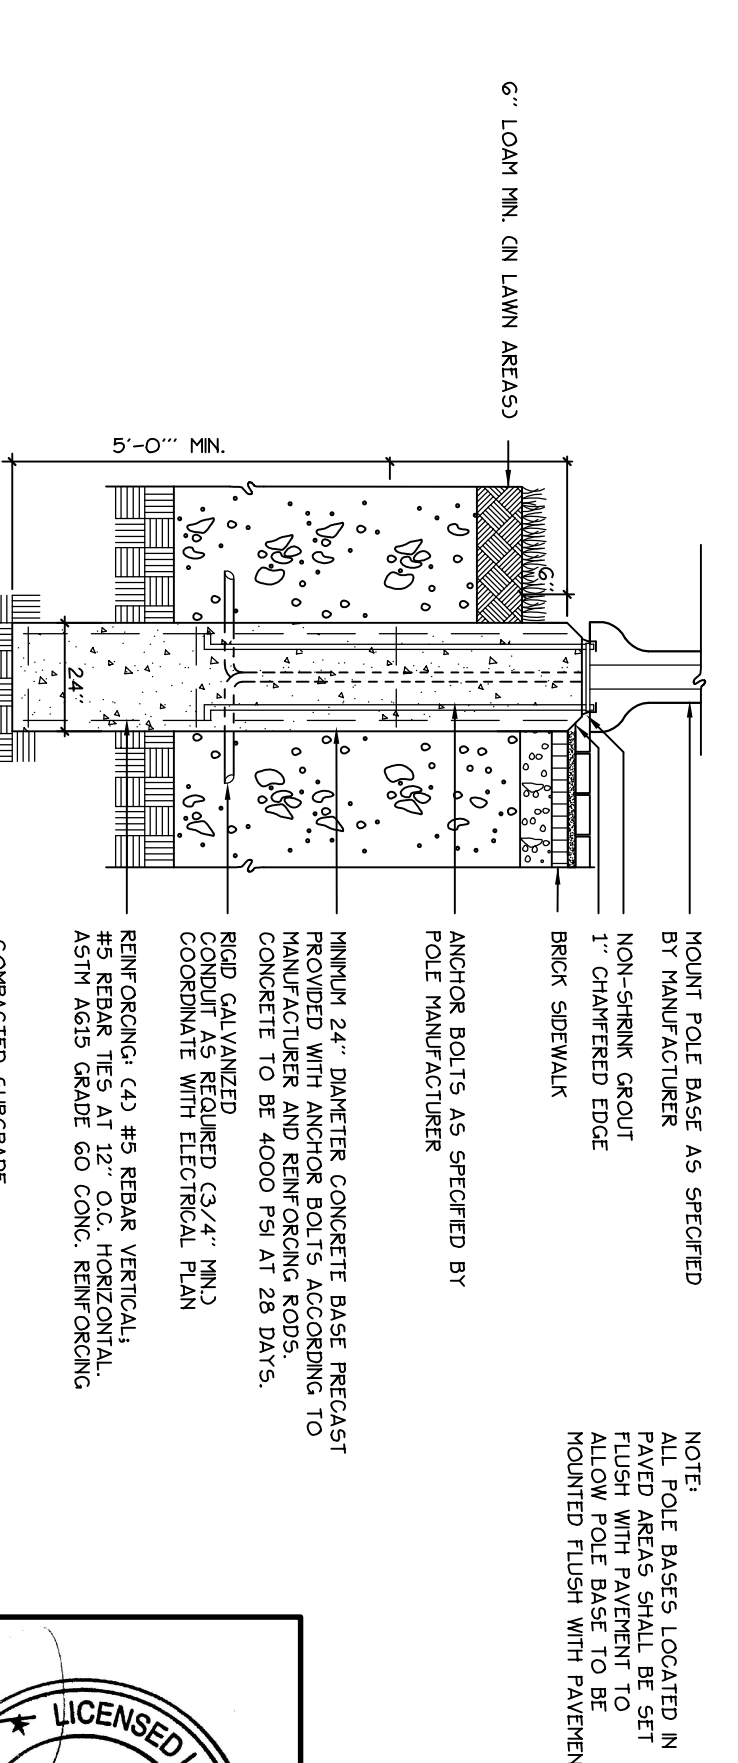

13 LIGHT POLE BASE  
NOT TO SCALE

**Prepared For:**  
SOUTHERN MAINE STUDENT  
247 Commercial Street  
Rockport, Maine 04856  
Tel: (207) 258-4097

**Prepared By:**  
MITCHELL & ASSOCIATES  
Landscape Architects  
70 Center Street  
Portland, Maine 04101  
Tel: (207) 774-4427

**GP** Consulting Engineers, Inc.  
15 Siskier Road  
Orono, ME 04959  
207-687-8900  
Fax: 207-687-8912



**BAYSIDE VILLAGE**  
A STUDENT HOUSING COMPLEX

132 Marginal Way  
Portland, Maine

**Date:** JUNE 15, 2007

**Issued For:** CONSTRUCTION

**Revisions:**  
July 17, 2007 - Construction Drawings  
September 10, 2007 - Added Stamp  
September 14, 2007 - Revised Detail

**Title:** SITE DETAILS

**Scale:**

**North:**

**Sheet No.:** 7

Reproduction or reuse of this document without the written consent of Mitchell & Associates is prohibited.

