

**Submittal Data: 15RLS3
Inverter Driven Heat Pump**

15,000 BTU Heat-Pump System

Job Name: Seagull Cottage TEIA Date: 5-15-15
 Location: 12 Srefethen Ave, Peaks Island Approval: _____
 Engineer: n/a Construction: _____
 Submitted to: City of Portland Unit #: _____
 Submitted by: Goggin Energy Drawing #: _____
 Reference: n/a

General Features

- Refrigerant Type R410A.
- Human Sensor
- Wired and wireless remote controllers
- Double swing automatic
- Automatic airflow adjustment
- Low noise mode
- Powerful mode
- 5- Years Parts, 7-Years Compressor Warranty (See Warranty Statement for details)
- Program timer
- Weekly time

Model Information

Outdoor..... AOU15RLS3
 Indoor..... ASU15RLS3

Electrical..... 208/230V AC 1ph-60Hz
 Available Voltage Range..... 208/230 +/- 10%
 Minimum Circuit Ampacity..... 17.2 A
 Max Fuse Size..... 20A
 Max Starting Current..... 5.2 A

Input Power

Cooling..... 1.04 kW
 Heating..... 1.15 kW

Running Current

Cooling..... 4.8 A
 Heating..... 5.2 A

Capacity

Nominal Cooling..... 15,000 Btu
 Min-Max Cooling..... 3,100-18,400 Btu/h
 Nominal Heating..... 18,000 Btu/h
 Min-Max Heating..... 3,100-23,900 Btu

Compressor

..... Rotary (inv x1)
 Motor Output..... 1,000 W
 Refrigerant..... R410a
 Charge..... 3 lbs. 1 oz
 Oil..... FREOL a68SZ

Fan Motor

(Condenser) Type: DC Propeller x 1
 (Condenser) Motor Output..... 49 W
 (Evaporator) Type: DC Cross flow fan x1
 (Evaporator) Motor Output..... 61 W

Heat Exchanger {Condenser (C) Evaporator (E)}

Dimensions (H x W x D)
 Condenser..... 23-1/8 x 34-11/16 x 1-7/16 in. (588x881x36.4 mm)
 Evaporator..... Main 15-1/8 x 28-3/8 x 1-3/16 in. (384x720x30) Sub 3-5/16 x 28-3/8 x 1/2 in. (84x720x13.3 mm) 4-15/16 x 28-3/8 x 1/2 in. (126x720x13.3 mm)
 Fin Pitch..... 20 FPI (C) Main 21 FPI Sub 18 FPI (E)
 Rows x Stages..... 2 x 28 (C) Main 3 x 24 Sub 1 x 10 (E)
 Pipe Type (Material)..... Copper (C) Copper (E)
 Fin Type (Material)..... Aluminum (C) Aluminum (E)

Note: Specifications are based on the following conditions.
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.44°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB.
 Heating: Indoor temperature of 70°F (21.11°C) DB/59°F (15°C) WB, and outdoor temperature of 47°F (8.33°C) DB/43°F (6.11°C) WB.
 Pipe length: 14ft. 7in. (7.5m), Height difference: 0ft. (0m) (Outdoor unit – indoor unit)



Operation Temperature Range

Cooling..... 14°F (-10°C) to 115°F (46°C)
 Heating..... -5°F (-21°C) to 75°F (24°C)

Efficiency

SEER..... 25.3
 EER (cooling)..... 4.09 kW/kW
 COP (heating)..... 4.59kW/kW / 15.7 Btu/hW
 HSPF (heating)..... 13.4 Btu/hW

Enclosure (Condenser)

Material..... Painted galvanized steel
 Color..... Beige (10 YR 7.5/1.0 NN)

Sound Pressure Level

Outdoor..... 49 dB(A)
 Indoor..... 45 dB(A)

Dimensions

H x W x D
 Outdoor in. (mm)..... 24-1/2 (620) x 31-1/8 (790) x 11-7/16 (290)
 Indoor in. (mm)..... 11-5/8 (295) x 37 (940) x 10-5/8 (270)

Connection Pipe

Liquid..... 1/4" / 6.35 mm Flare
 Gas..... 1/2" / 12.7 mm Flare
 Method (Liquid/Gas)..... Brazing
 Max Length (Pre-charge)..... 65 ft.(20 m) / (49 ft. {15 m})
 Max Height Difference..... 49 ft. (15 m)

Weight



Outdoor..... 86 lbs (39 kg)
 Indoor..... 31 lbs (14 kg)

Accessories



Wired Remote Controller..... UTY-RVNUM
 Wired Remote Controller..... UTY-RNNUM
 Simple Remote Controller..... UTY-RSNUM
 Communication Kit..... UTY-TWBOXF1
 External Connection Kit..... UTY-XWZXZ5

Dimensions: 15RLS3

[Unit: in. (mm)]


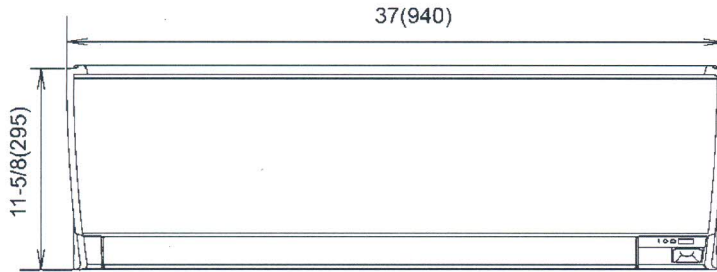


3/4(19) 31-1/8(790) 2-5/8(67) 11/16(18) 11-5/16(288) 7/8(23)

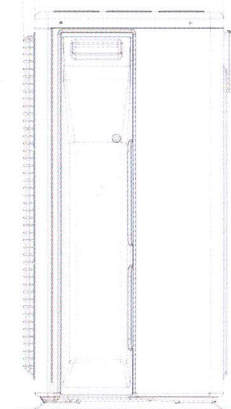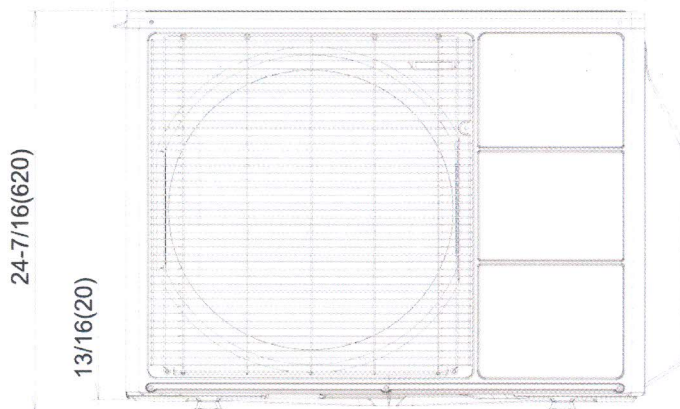

Front view

Side view

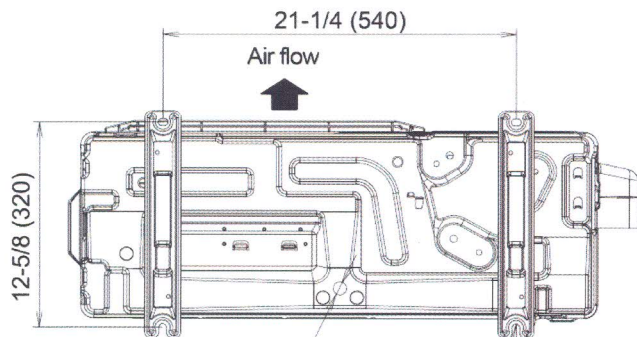

Drain pipe mounting place (Ø13/16 (20)) 4-Ø7/16 (11.3) hole

Bottom view

The Fujitsu logo is a registered trademark of Fujitsu Limited.
 The Halcyon logo and name is a trademark of Fujitsu General America, Inc. Copyright 2014 Fujitsu General America, Inc.
 Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.