



SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine Department of Human Services
 Division of Health Engineering, Station 10
 (207) 287-5672 Fax: (207) 287-3165

Town, City, Plantation
 Portland (Cliff Island)

Street, Road, Subdivision
 57 Church Road

Owner or Applicant Name
 John & Sharon Hiltonen

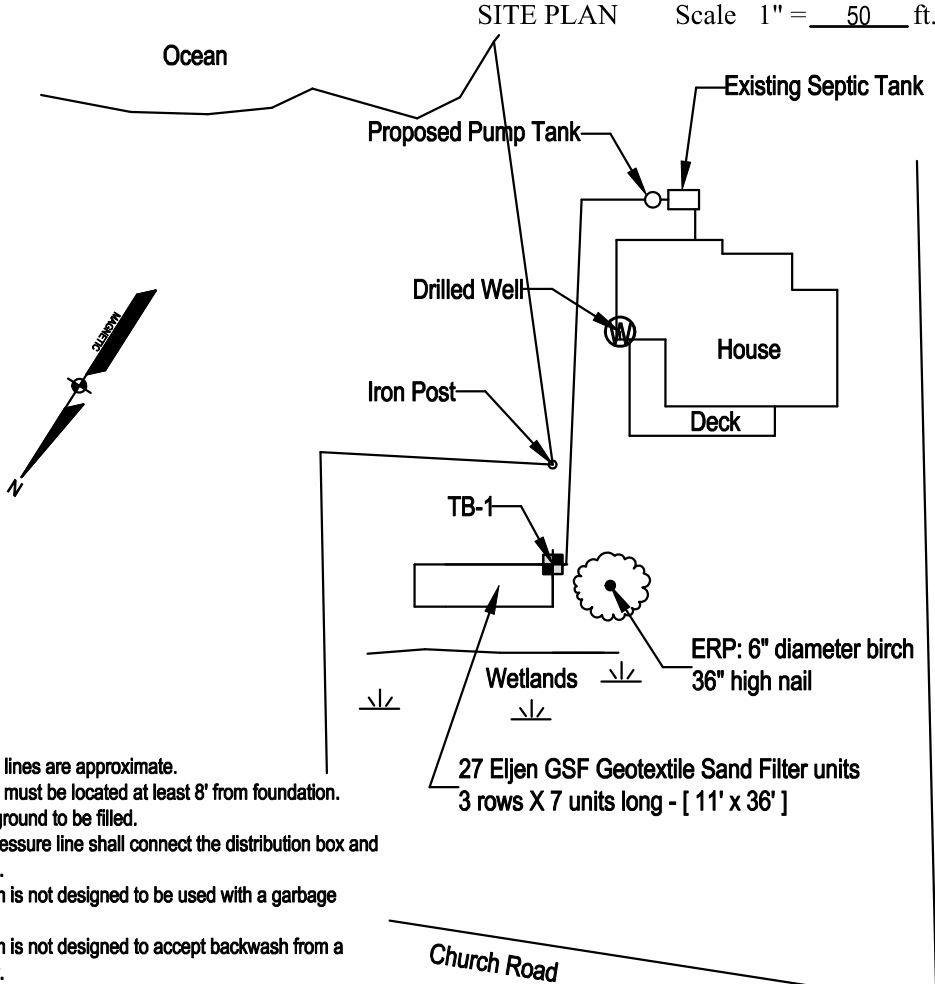

NOTES:

1. All property lines are approximate.
2. Septic tank must be located at least 8' from foundation.
3. Scarify all ground to be filled.
4. A 2" dia. pressure line shall connect the distribution box and the pump tank.
5. This system is not designed to be used with a garbage disposal.
6. This system is not designed to accept backwash from a water softener.

SOIL PROFILE DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole # TB-1 Test Pit Boring

_____ " Depth of organic horizon above mineral soil

Depth below mineral soil surface (inches)	Texture	Consistency	Color	Mottling
0				
6	Sandy Loam	Friable	Brown	
12				
18	Sandy Loam	Friable	Reddish Brown	
24				
30				
36				
42				
48				

Bedrock at 18 inches

Soil Profile	Classification Condition	Slope Percent	Limiting Factor Depth	<input type="checkbox"/> Groundwater	<input type="checkbox"/> Restrictive Layer	<input type="checkbox"/> Bedrock
<u>2</u>	<u>All</u>	<u>8</u>	<u>18"</u>			

Observation Hole # _____ Test Pit Boring

_____ " Depth of organic horizon above mineral soil

Depth below mineral soil surface (inches)	Texture	Consistency	Color	Mottling
0				
6				
12				
18				
24				
30				
36				
42				
48				

Soil Profile	Classification Condition	Slope Percent	Limiting Factor Depth	<input type="checkbox"/> Groundwater	<input type="checkbox"/> Restrictive Layer	<input type="checkbox"/> Bedrock
_____	_____	_____	_____			

Richard Aburat
 Site Evaluator Signature

034
 SE #

09-17-12
 Date