City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716	lding or Use Permit Applic	tion 389 Congress	Street, 04101; Tel: (207) 87	4-8703, FAX: 874-8716
Location of Construction:	Owner:		Phone:	Permit No:
Owner Address:	Lessee/Buyer's Name:	Phone:	BusinessName	000569
Contractor Name:	Address:	Phone:		Permit Issued:
Past Use:	Proposed Use:	COST OF WORK:	PE	MAY 3 n 2000
	7 00 0 d.	FIRE DEPT. Character of Parish	INSPECTION)
		Signature:	Denied Ose Groupit Type:	Zone CBL:
Proposed Project Description:	The state of the s	PEDESTRIAN AC	PEDESTRIAN ACTIVITIES DISTRICT (A.A.D.)	Zoning Approval:
labove ground pool		Action: A	Approved Approved with Conditions:	Special Zone or Reviews: ☐ Shoreland ☐ Wetland
		Signature:	Date:	☐ Flood Zone ☐ Subdivision
Permit Taken By:	Date Applied For:			☐Site Plan maj ⊡minor⊡mm□
		May 26, 2000	Sins Sins	
				Zoning Appeal

- This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
 - Building permits do not include plumbing, septic or electrical work. દ્રાં
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work...

CERTIFICATION

☐ Not in District or Landmark
☐ Does Not Require Review
☐ Requires Review

Historic Preservation

□ Variance
□ Miscellaneous
□ Conditional Use
□ Interpretation
□ Approved

☐ Approved ☐ Approved with Conditions ☐ Denied

Date:

Action:

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, tive shall have the authority to enter all h permit if a permit for work described in the areas covered by such per

XI ta	suc	
Sec.	2	
<u>5</u>	aple	
Zec	plic	
ithou	s) aț	
ਲ S	qe(;	
तु	ဝ	
E	x th	
oge	us c	
ဍ	/isio	
arr	pro	
I I	the	
E 2	ırce	
ř	enfc	
SIC	r to	
	hou	
	ble	
IICa	sons	
loca ili tre application is issuca, i certify mai the code official s authorized representa	mit at any reasonable hour to enforce the provisions of the code(s) applicable to suc	
3	any	
∃ =	t at	
2	Ē	

ADDRESS

SIGNATURE OF APPLICANT


RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

PHONE:

PHONE

0000

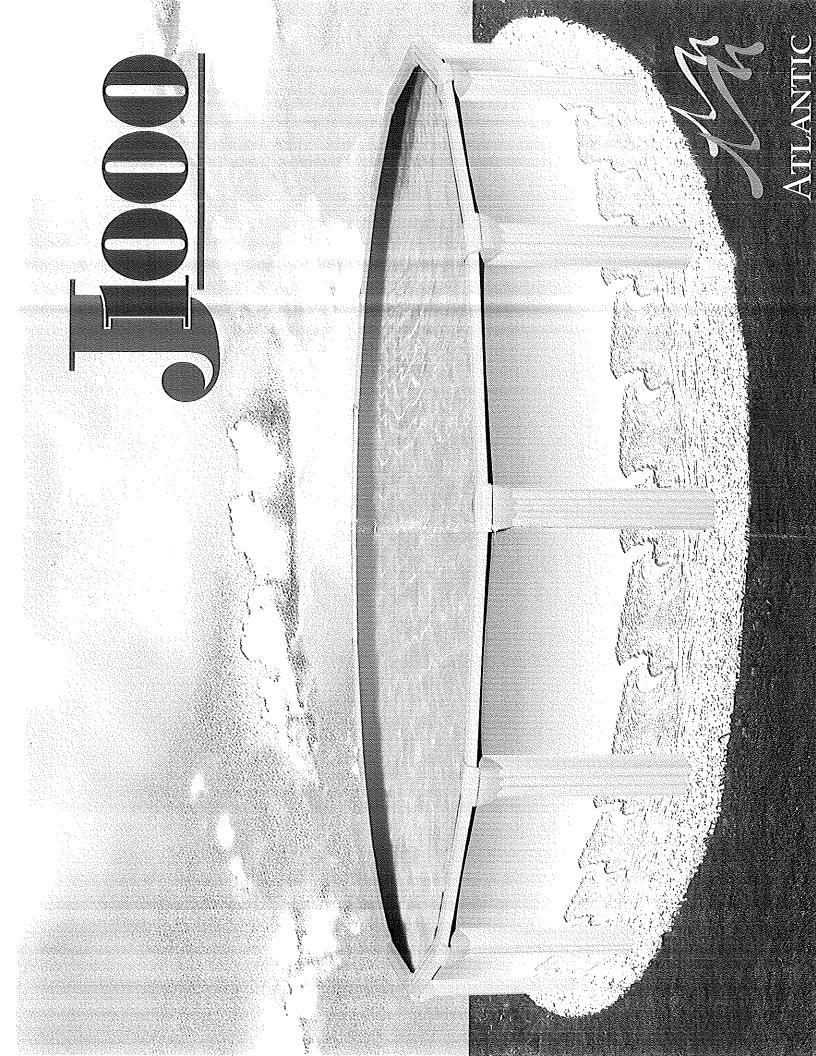

BUILDING PERMIT REPORT

9
DATE: 26 MAY 2000 ADDRESS: 12 Vermon T Ave. CBL: 466-A-614 REASON FOR PERMIT: Above ground Swimming pool
REASON FOR PERMIT: Above ground Swinning Pool
BUILDING OWNER: Sandra Massell.
PERMIT APPLICANT: /CONTRACTOR // A M CO POLL USE GROUP: // CONSTRUCTION TYPE: CONSTRUCTION COST: 2400.0 PERMIT FEES 42.00.
USE GROUP: CONSTRUCTION TYPE: CONSTRUCTION COST: 2400.0 PERMIT FEES 42.00
The City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments) The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
GONDATION OF A PRINCE AND

This permit is being issued with the understanding that the following conditions are met:

This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.

Before concrete for foundation is placed, approvals from the Development Review Coordinater and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING." Selling

Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2

Foundations anchors shall be a minimum of 1/2" in diameter, T' into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17

Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.

Precaution must be taken to protect concrete from freezing. Section 1908.0

It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.

Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)

All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical

Code/1993), Chapter 12 & NFPA 211

10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.

11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42". In occupancies in Use Group A,B.H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall have a height not less than than 36" and not more than 42". Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section 1014.7)

12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)

13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 1/2" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)

14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4

15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)

16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)

The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms In each story within a dwelling unit, including basements 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0) 21. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard. 22. The Sprinkler System shall be installed and maintained to NFPA #13 Standard. 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the
- City's Building Code. (The BOCA National Building Code/1999) 24. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
- All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.

28. All requirements must be met before a final Certificate of Occupancy is issued.

- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
- 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)

 All regular Set LACKS Are to be measured and implement the attached Land Use Zoning report requirements. From Property lines It he information and notching shall be done in accordance with Sections 2305.3, 2305.3, 1, 2305.4,4 and 2305.5.1 of the City's Building Code, S Code/1993). (Chapter M-16) 33. Bridging shall comply with Section 2305.16. 34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0) 35. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999) <u> 362</u>

ges, Building Inspector McDougall, PFD

Marge Schmuckal, Zoning Administrator

PSH 1/26/00

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

***THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD.

****CERTIFICATE OF OCCUPANCY FEE \$50.00

**** All PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL,(AS PER SECTION114.0 OF THE BUILDINGCODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT.2000, OR EQUIVALENT.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted. Location/Address of Construction: Tax Assessor's Chart, Block & Lot Number Owner: Telephone#: Block# Owner's Address: Lessee/Buyer's Name (If Applicable) 2 Vermont Proposed Project Description:(Please be as specific as possible) 3 00VC ground Contractor's Name, Address & Telephone Rec'd By: Namco Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application: 1) A Copy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available 3) A Plot Plan (Sample Attached) If there is expansion to the structure, a complete plot plan (Site Plan) must include: The shape and dimension of the lot, all existing buildings (if any), the proposed structure ind the distance from the actual property lines. Structures include decks porches, a bow windows cantilever sections and roof pventages, as well as, sheds pools, garages and any other accessory structures. Scale and required zoning district setbacks N S 6 2000 (A) Building Plans (Sample Attached) A complete set of construction drawings showing all of the following elements of construction: Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures) Floor Plans & Elevations Window and door schedules Foundation plans with required drainage and dampproofing Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included. Certification I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the

Signature of applicant: 50-y Date: 5-26.00 Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter. O:\INSP\CORRESP\MNUGENT\APADSFD.WPD

codes applicable to this permit.

DATE: 5/23/00 STORE: 5/23/00	POOL QUOTATION	1911 for tonly fund
NAME_SAWORA BASSETT ADDRESS: SALES PERSON: 654 TON! 4	CITY:	E NO. 797- 7943 ZIP: PHONE NO. 854-0508
POOL: ##SWATIG DI'X50 LINER: DO CAL DEAD THE POOL ONLY PRICE: \$ 199 POOL PACKAGE PRICE \$ 199 MONTHLY PAYMENT \$ 2256	POOL: POOL: PAUC POOL ONLY PRICE: POOL PACKAGE PRICE	·
POOL: LINER: POOL ONLY PRICE: POOL PACKAGE PRICE: MONTHLY PAYMENT: J. J	POOL: LINER: POOL ONLY PRICE: POOL PACKAGE PRICE MONTHEY PAYMENT	A STATE OF THE STA
WASHINGSONS VACHUM HEAD VACHUM POLE APAPLETETERO	SELECTION HIS AND COMPLETE SATER AND COMPLETE SELECTION OF THE SELECTION O	THERMOMETER HORICIAMPS DELIVERY ME RETURN
PUMP/MOTOR: I SPHED ASPEED LADDER: A-FRAME IN-POOL	48" 52" DESCRIPTION: A	i Program and a company
DELUXE MAINTENANCE KIT AUTOMATIC VACUUM EASY ENTRY SYSTEM SOLAR HEATING SYSTEM BALL VALVES 1174 30 67	POOL LIGHT SOLAR BLANKET AUTO CHLORINATOR WINTER COVER	Mark Para Anna
COLAR REEL_ TENCING_ OTHER_RESIA) ATRAMEL	DECK_UPGRADE LINER #2	95 GA.+480. X
NAMCO HAS SWIMMING POOT SALE ENDS	OR WHEN SOLD OR WHEN SPECIAL PAYMENT OPTIONS	OUT

MCLUMICI STAPPIC ITTOK

Hause ENCE Start to the total of the total Parox