A5 NOT USED

REFERENCED FROM: SCALE:



A5 PLAN DETAIL AT END OF HALF WALL

REFERENCED FROM: B5/A0.00 SCALE: 3" = 1'-0"

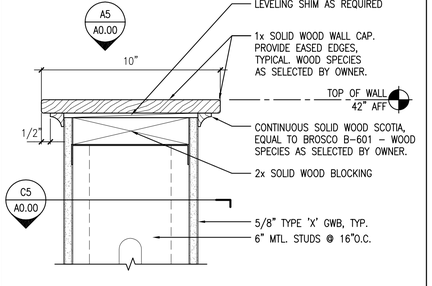

B5 SECTION DETAIL @ HALF WALL CAP

REFERENCED FROM: SCALE: 3" = 1'-0"

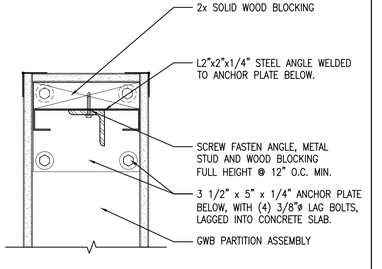

C5 END SUPPORT DETAIL @ HALF WALL

REFERENCED FROM: B5/A0.00 SCALE: 3" = 1'-0"

NOTES:

1) APPLY STENCILS TO EACH FIRE RATED WALL.

2) STENCILS SHALL BE APPLIED SO THAT THE BOTTOM OF THE LETTERS ARE 6" ABOVE THE CEILING GRID AND @ EVERY 10'-0" ON CENTER ALONG THE LENGTH OF THE WALL.

3) WHERE THERE IS NOT A CEILING GRID, STENCILS SHALL BE APPLIED 11'-0" A.F.F., AND @ EVERY 10'-0" ON CENTER ALONG THE LENGTH OF THE WALL.

E1 RATED WALL LABELING

REFERENCED FROM: SCALE: 1/2" = 1'-0"

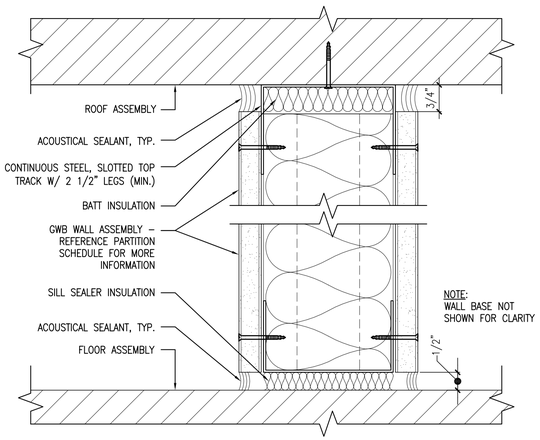

E3 TOP AND BOTTOM OF NON-RATED WALL DETAIL

REFERENCED FROM: SCALE: 6" = 1'-0"

1. PROVIDE MOISTURE RESISTANT TYPE "MRX" GWB AT ALL WALL SURFACES WITHIN ALL TOILET ROOMS & JANITOR'S CLOSET. PROVIDE TYPE "MRX" GWB TO 4'-0" A.F.F. BEHIND ALL SINK AND WATER FOUNTAIN LOCATIONS WHETHER INDICATED OR NOT.
2. PROVIDE MIN. 1/2" CLEARANCE BETWEEN CONC. SLAB AND GWB AND SEAL WITH ACOUSTIC SEALANT. PROVIDE SILL SEALER INSULATION FOR BOTTOM PLATES OF PARTITIONS.
3. BRACE WALL ASSEMBLIES TO STRUCTURE ABOVE AT ALL DOORS AND ELSEWHERE AS REQUIRED.
4. PROVIDE SOLID FIRE RATED BLOCKING AS INDICATED ON DRAWINGS AND AS REQUIRED BY MANUFACTURER'S EQUIPMENT (CASE WORK, TOILET ACCESSORIES, CLOSET RODS & SHELVING, H.C. GRAB BARS, ETC.)
5. PROVIDE CONTINUOUS ACOUSTICAL SEALANT AT ALL PENETRATIONS (I.E. ELECTRICAL BOXES, DUCTS, SPRINKLER HEADS, ETC.) IN WALLS, FLOORS, & CEILINGS. UTILIZE APPROPRIATE FIRE STOPPING/SEALANT MATERIALS ONLY AT FIRE RATED ASSEMBLIES.
6. SEAL ALL PENETRATIONS IN VAPOR BARRIER, (EXTERIOR WALLS, BOTTOM OF TRUSS & CONCRETE SLAB-ON-GRADE) AS REQUIRED WITH APPROVED SEALERS, INSULATION AND TAPES.

1. FIRE SAFING & FIRE STOPPING PENETRATIONS:
PROVIDE FIRE SAFING SYSTEM/MATERIAL AT ALL PENETRATIONS THRU FIRE RATED ASSEMBLIES. UTILIZE ONLY AND CONFORM TO UL TESTED AND APPROVED DETAILING AND METHODS APPROPRIATE FOR THE CONDITION AT HAND. COORDINATE PROPOSED SAFING SYSTEMS & MATERIALS FOR APPROPRIATENESS & COMPATIBILITY WITH THE FIRE RATING SYSTEM PENETRATED.
2. FIRE SAFING & FIRE STOPPING TOP OF FIRE RATED WALL ASSEMBLIES AND JOINTS:
PROVIDE FIRE SAFING SYSTEM/MATERIAL AS REQUIRED TO PROPERLY SEAL ALL TOP OF FIRE RATED WALL ASSEMBLIES AND FLOOR/WALL JOINT CONDITIONS. UTILIZE ONLY AND CONFORM TO UL TESTED AND APPROVED DETAILING AND METHODS APPROPRIATE FOR THE CONDITION AT HAND.
3. INAPPROPRIATE FIRE SEALANT / STOPPING MATERIAL USE:
THE CONTRACTOR SHALL NOT UTILIZE FIRE STOPPING/SEALANT AT ANY NON-FIRE RATED CONDITIONS. UTILIZE FIRE STOPPING/SEALANT ONLY WHERE REQUIRED. FIRE STOPPING MATERIALS SHALL BE RED IN COLOR.
4. FIRE STOPPING CONTRACTOR QUALIFICATIONS:
THE CONTRACTOR SHALL HIRE AND ENGAGE A FIRE STOPPING CONTRACTOR THAT REGULARLY ENGAGES IN THE APPLICATION OF FIRE STOPPING AND FIRE SAFING MATERIALS. THIS CONTRACTOR SHALL BE "CERTIFIED" IN THE USE AND APPLICATION OF ALL FIRE STOPPING AND SAFING MATERIAL AND THEIR INSTALLATION METHODS. FIRE STOPPING INSTALLATION "TRAINING" WILL NOT BE CONSIDERED A SUBSTITUTE FOR OBTAINING "CERTIFICATION"!
5. LABELING OF RATED ASSEMBLIES:
THE CONTRACTOR SHALL LABEL ALL RATED ASSEMBLIES IN ACCORDANCE WITH DETAIL E1/A0.00.

E5 NEW WORK FLOOR PLAN

REFERENCED FROM: SCALE: 1/8" = 1'-0"

PARTITION SCHEDULE

PARTITION TYPE	FIRE RATINGS AND ACOUSTICAL RATINGS	GENERAL WALL DESCRIPTION	GENERAL PICTORIAL
1A		FURRING AT EXISTING CMU WALL ASSEMBLY: 2 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. TAGGED SIDE: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	TAGGED SIDE 3 1/4" OPPOSITE SIDE
1B		FURRING AT EXISTING CMU WALL ASSEMBLY: 2 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. TAGGED SIDE: (1) LAYER 5/8" TYPE "MRX" GWB FROM FINISH FLOOR 8'-0" AFF. (1) LAYER 5/8" TYPE "X" GWB FROM 8'-0" AFF TO UNDERSIDE OF DECK/STRUCTURE.	
2	1 HOUR FIRE RATED ASSEMBLY SIMILAR TO UL DESIGN NO. U419 STC = 45	3 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	TAGGED SIDE 4 7/8" OPPOSITE SIDE
2A	STC = 45	3 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO 6" ABOVE CEILING HEIGHT. PROVIDE BRACING AS REQUIRED. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	
2B	STC = 45	3 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	
2C	STC = 45	3 5/8" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. TAGGED SIDE: (1) LAYER 5/8" TYPE "MRX" GWB FROM FINISH FLOOR 8'-0" AFF. (1) LAYER 5/8" TYPE "X" GWB FROM 8'-0" AFF TO UNDERSIDE OF DECK/STRUCTURE. OPPOSITE SIDE: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	
4A		6" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO 6" ABOVE CEILING HEIGHT. PROVIDE BRACING AS REQUIRED. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	TAGGED SIDE 7 1/4" OPPOSITE SIDE
4B		6" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO 6" ABOVE CEILING HEIGHT. PROVIDE BRACING AS REQUIRED. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "MRX" GWB, FULL HEIGHT.	
4C		6" METAL STUDS @ 16" O.C. FROM FINISHED FLOOR TO UNDERSIDE OF EXISTING DECK/STRUCTURE. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER 5/8" TYPE "X" GWB, FULL HEIGHT.	
5		INFILL/ALIGN WITH EXISTING WALL ASSEMBLY: METAL STUDS @ 16" O.C. SIZED TO ALIGN FINISHES @ PERIMETER OF INFILL. CONTINUOUS SOUND ATTENUATION BATTS. BOTH SIDES: (1) LAYER GWB FROM FINISHED FLOOR SEALED TIGHT AT PERIMETER OF OPENING - ALIGN WITH ADJACENT EXISTING GWB FINISH. PATCH AND REPAIR ADJACENT FINISH AS REQUIRED. PATCH TO MATCH EXISTING.	TAGGED SIDE VIF ALIGN, TYP. ALIGN, TYP. OPPOSITE SIDE

CWS ARCHITECTS
ARCHITECTURE | INTERIOR DESIGN
434 Cumberland Avenue Portland ME 04101
OFFICE: 207 774 4441 CWSARCH.COM

DESIGNER

CWS ARCHITECTS
ARCHITECTURE | INTERIOR DESIGN
434 CUMBERLAND AVENUE
PORTLAND, MAINE 04101
T: 207.774.4441
F: 207.774.4116
WWW.CWSARCH.COM

OWNER

309 EAST PACES FERRY ROAD
ATLANTA, GEORGIA 30305
PHONE: (678) 402-3000

PROJECT

AARON'S FIT-UP
STORE #: F0810

449 FOREST AVE.
PORTLAND, MAINE 04101

DRAWING

PARTITION SCHEDULE, NOTES AND DETAILS

CWS PROJECT NUMBER: 15076

REVISIONS

DRAWING NUMBER

A0.00

SCALE: 1/8" = 1'-0"

DATE: 01/08/2016

ISSUED FOR CONSTRUCTION

NOTE: THESE DRAWINGS HAVE BEN UPDATED TO THE CURRENT SPECIFICATIONS FOR AN AARON'S SALES AND LEASE OWNERSHIP STORE. DEVIATION FROM THESE PLANS IS NOT PERMITTED WITHOUT EXPRESS WRITTEN PERMISSION.