City of Portland, Maine - Building	Building on Use Permit Application 389 Congress Street, 04101, Tel. (207) 874-8703 FAX: 874-871	389 Congres	s Street, 04101, Tel: (207) 8	74-8703 FA X 874-871
Location of Construction:	Owner:	, o	Phone:	Bornia Mc
Owner Address:	Lessee/Buver's Name.	Die		
SAL	and a state of the	Fnone:	* BusinessName:	
Contractor Name:	Address:	Phone:	le:	Permit Issued:
Past Use:	Proposed Use:	COST OF WORK:	IK: PERMIT FEE:	
## ** ** ** ** ** ** ** ** ** ** ** ** *	e e e e e e e e e e e e e e e e e e e			1000 to 2 h
Statement of the first the statement of	<b>अ</b> वविकास	FIRE DEPT.	☐ Approved INSPECTION: ☐ Denied Use Group: Type:	
Proposed Project Description:		Signature:	Signature: /	
		PEDESTRIAN A	PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)	Zoning Approval
renodeling garage adding new roof	roof and concreme floor	Action:	Approved Approved with Conditions:	Special Zone or Review
			Denied	•
Darmit Talan D		Signature:	Date:	ig Service
relini taken by:	Date Applied For:			☐ Site Plan maj ⊡minor □mm
				Zenina America
<ol> <li>This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.</li> <li>Building permits do not include plumbing, septic or electrical work.</li> <li>Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.</li> </ol>	pplicant(s) from meeting applicable Statitic or electrical work. within six (6) months of the date of issua all work	e and Federal rules. nce. False informa-	,	Zoning Appeal  Variance  Miscellaneous  Conditional Use  Interpretation
			. 4	
			PERMIT ISSUED WITH REQUIREMENTS	Historic Preservation  Mot in District or Landmark Does Not Require Review Requires Review Action:
I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit	CERTIFICATION  named property, or that the proposed worlhis authorized agent and I agree to confisued, I certify that the code official's aut to enforce the provisions of the code(s)	k is authorized by thom to all applicable horized representation applicable to such	e owner of record and that I have been e laws of this jurisdiction. In addition, ive shall have the authority to enter all permit	☐ Approved ☐ Approved with Conditions ☐ Denied ☐ Date:
SIGNATURE OF APPLICANT	ADDRESS:	Sept 5 2000 DATE:	PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WORK TITH E				PERMIT ISSUED
White-Permit Desk	k Green-Assessor's	Canary-D.P.W. Pink-Pu	PHONE: W	WITH CHENTEN S

## BUILDING PERMIT REPORT

D.	EASON FOR PERMIT: Remodeling garage (roof & Floor)
R	EASON FOR PERMIT: Remodeling garage (roof & Floor)
181	MILDINGOWNER: Cze Law Sks run
PI	SE GROUP: U CONSTRUCTION TYPE: 5 9 CONSTRUCTION COST: 2,000, PERMIT FEES! 36.85
U	SE GROUP: $\mathcal{U}$ CONSTRUCTION TYPE: $5 \mathcal{D}$ CONSTRUCTION COST: $2,000$ , PERMIT FEES! $36.8$
	ne City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments) ne City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
	CONDITION(S) OF APPROVAL
Ti	nis permit is being issued with the understanding that the following conditions Shall be met: */ 436 #3/
4	
	n ti o in i
公i.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.  Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A
· 2.	Before concrete for foundation is placed, approvals from the Development Review Cooking and Inspection and Insp
_	24 hour notice is required prior to inspection) "ALL DOT Enter STABLE DOE STABLE DE TRANSPORTE IN THE PROPERTY OF THE PROPERTY
3.	
	percent material that passes through a No. 4 sieve. The drain shall extend a mannah of T inches possess through a No. 4 sieve. The drain shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not higher than the bottom of the base under the floor.
	less than 6 inches above the top of the footing. The top of the trian shall be covered with an approved, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations tile or perforated pipe is used, the invert of the pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and
•	shall be protected with an approved filter membrane material. The pipe of the shall be protected with an approved filter membrane material. Section 1813.5.2
	shall be covered with not less than 6" of the same material. Section 1813.5.2  Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a
4.	1 CLO C. Laborana holta Section 7405 17
_	Weterscofing and demonscofing shall be done in accordance with Section 1813.0 of the balloning court
5. 6.	Precaution must be taken to protect concrete from freezing. Section 1908.0
7.	It is strongly recommended that a registered land surveyor check an foundation forms before concrete is placed.
	proper setbacks are maintained.
8.	Private garages located beneath habitable rooms in occupancies in Use Group Ref., Rez., Res. of Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating.
	The state of the s
	gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)  gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA National Mechanical
0	gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA National Mechanical All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical
<b>9</b> .,	Code/1993). Chapter 12 & NFPA 211  Code/1993). Chapter 12 & NFPA 211
10.	Code/1993). Chapter 12 & NFPA 211  Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.  Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11.	Guardrails & Handrails: A guardrail system is a system of obtaining components beared the lover level. Minimum height all Use Groups 42",
	In occupancies in Use Group A, B.H4, I-1, I-2, M and R and public garages and open putants and the state of
	of solid material such that a sphere with a diameter of 4 cannot pass through any opening. Cannot pass through any opening with a grant pass than 30", but not would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38".
	than 29"\ Handrail orin size shall have a circular cross section with an outside diameter of at reast 2.
	1021 B. 1022 (N) Handrails shall be on both sides of stateway. (Section 1014.7)
12.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)  Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13.	Stair construction in Use Group R-3 & R-4 is a minimum of 10 treat and 7.75 minimum.
	7" maximum rise. (Section 1014.0)
14.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4  The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4  Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door  Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door  Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door
15.	Every sleeping room below the fourth story in buildings of Use Groups R and 1-1 shall have at least one optical knowledge or separate tools, approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools, approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools.
	approved for emergency egress or rescue. The units must be operable from the inside without the use of special telephone approved for emergency egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (610mm) above the floor. All
	egress or rescue windows from sleeping rooms shan have a minimum net clear opening stop of Cartier 1010.4)
	egress or rescue windows from steeping rooms shall have a humanular net clear opening of 5.7 sq. ft. (Section 1010.4) net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)
16.	Each apartment shall have access to two (2) separate, remote and approved means of extension (Section 1010.1)
	Each apartment shall have access to two (2) separate, remote and approve the second 1010.1) from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1) All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's.
17.	All vertical openings shall be enclosed with construction having a interacting of a least state of the state
	(Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)  The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic
18.	The boiler shall be protected by enclosing with (1) hour morands

extinguishment. (Table 302.1.1)

19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms In each story within a dwelling unit, including basements 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0) 21. The Fire Alarm System shall maintained to NFPA #72 Standard. 22. The Sprinkler System shall installed and maintained to NFPA #13 Standard. 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999) 24. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year". 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection 26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics). 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done. 28. All requirements must be met before a final Certificate of Occupancy is issued. 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)

31. Please read and implement the attached Land Use Zoning report requirements. A TO INCLEASE THE EXIST POOT

32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code. 33. Bridging shall comply with Section 2305.16. 34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2405.0) 35. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code), 199 **Building Inspector** McDougall, PFD Marge Schmuckal, Zoning Administrator PSH 11/25/99 \*\*This Permit is herewith issued, on the basis of plans submitted and conditions placed the plans, any deviations shall require a separate approval. \*\*\*THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE

\*\*\*THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD.

\*\*\*\* Certificate of Occupancy Fees: \$50.00 each

\*\*\*\*\* All PLANS THAT REQUIRE A PROFESSIONAL DESIGN'S SEAL,( AS PER SECTION 114.0 OF THE BUILDING CODE ) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT. 2000 OR REQUIVALENT.

## THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

## **Building or Use Permit Pre-Application** Additions/Alterations/Accessory Structures To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or

Use Permit. NOTE \*\* If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted. Location/Address of Construction Telephone#: Tax Assessor's Chart, Block & Lot Number La# 100 Chart# Lessee/Buyer's Name (if Applicable) Owner's Address: Proposed Project Description: (Please be as specific as possible) Contractor's Name, Address & Telephone Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application: 1) A Copy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available 3) A Plot Plan (Sample Attached)

If there is expansion to the structure, a complete plot plan (Site Plan) must include: CITY OF PORTLAND, ME

The shape and dimension of the lot, all existing buildings (if any), the proposed structure and the distance from the actual > 3) A Plot Plan (Sample Attached) property lines. Structures include decks porches, a bow windows cautilever sections and roof overhangs, as well as, sheds, pools, garages and any other accessory structures. Scale and required zoning district setbacks 4) Building Plans (Sample Attached) A complete set of construction drawings showing all of the following elements of construction: Cross Sections w/Framing details (including porches, decks w/railings, and accessory structures) Floor Plans & Elevations Window and door schedules Foundation plans with required drainage and dampproofing Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included. Certification I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00 construction cost thereafter.

Signature of applicant:


O:\INSP\CORRESP\MNUGENT\APADSFD.\\PD


Date:

DATE	
・レベル	



BY \_\_\_\_

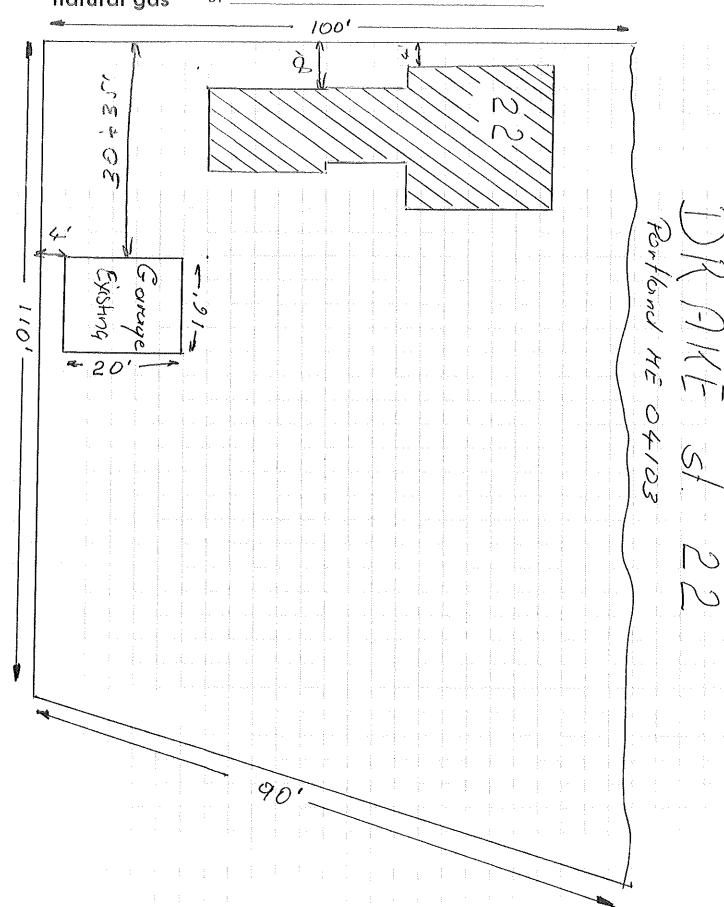

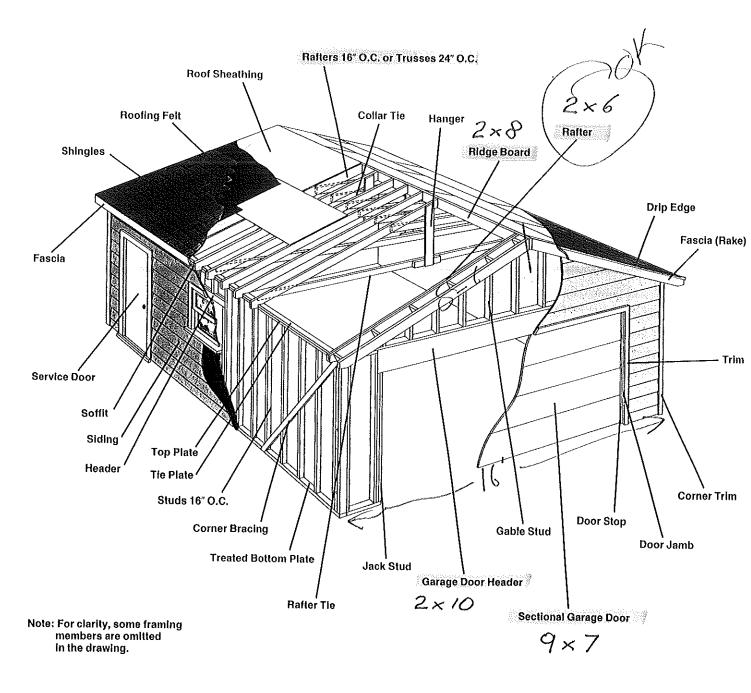

Exterior decorative items, windows and some doors shown on some models are optional and not included in standard package. See package specifications on page 3 for details.

4

Red-SAM