

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-

Location of Construction: 336 Capisic St		Owner: Shorea Craig	Phone: 871-0170	Permit No: 9705
Owner Address: SAA Pctd, ME 04102	Lessee/Buyer's Name:	Phone:	BusinessName:	PERMIT ISSUE Permit Issued: JUN 10 1997 CITY OF PORTLAND
Contractor Name: Shawn Pools	Address:	Phone:		
Past Use: l-fan	Proposed Use: Same	COST OF WORK: \$ 8,585.00	PERMIT FEE: \$ 65.00	Zone: C-3 CBL: 224-A-
		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: 4. Use Group: Type:	
Proposed Project Description: Install A/G Pool (24' Dia) Construct Deck (Steve Leighton)		Signature: _____		Zoning Approval: OK <input type="checkbox"/> Special Zone or Rev <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> Minor
		Signature: _____ Date: _____		
Permit Taken By: Mary Cresik	Date Applied For: 05 June 1997			

- This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

Richard Craig
SIGNATURE OF APPLICANT **Richard Craig** ADDRESS: **336 CAPISIC ST** DATE: **05 June 1997** PHONE: **871-0170**

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT: _____


COMMENTS

6/10/97 SEABACKS OK. BASE IS UNDERBLOCKS, 24' Ø. TA. NARDOLITANO TO DO ELECTRICAL.

WILL CALL OUT DECK FOR SOLAR TUBE INSPECTION. NEVER NOTIFIED OF INSPECTION.

3/3/98 MESSAGE TO OWNER - 12:45pm.

2/5/98 owner states nothing further on deck. Pool will be moved from property this summer 198. House has been sold and new owners don't want the pool on site.

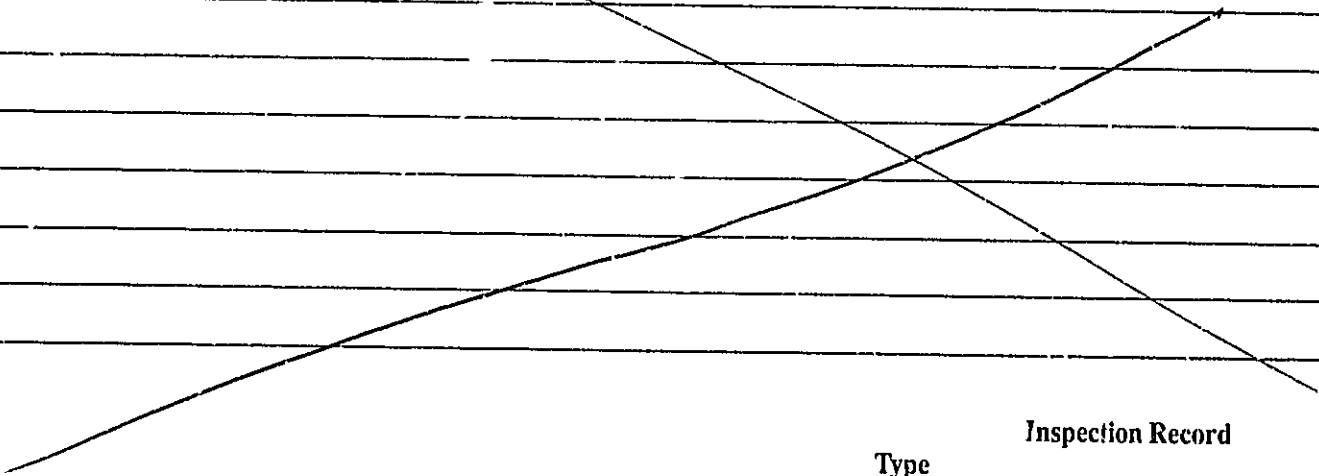

Type	Inspection Record	Date
Foundation:	_____	_____
Framing:	_____	_____
Plumbing:	_____	_____
Final:	_____	_____
Other:	_____	_____

BUILDING PERMIT REPORT

DATE: 10 June 97 ADDRESS: 336 Capisic St
REASON FOR PERMIT: Dock & Swimming Pool A/G
BUILDING OWNER: Gray
CONTRACTOR: owner
PERMIT APPLICANT: 11 APPROVAL: X1 X2 X8 DENIED


CONDITION(S) OF APPROVAL

- X1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- X2. Before concrete for foundation is placed, approvals from the ~~Development Review Coordinator~~ and Inspection Service must be obtained. (A 24 hour notice is required prior to inspection)
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage masonry 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
- X8. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a false effect.
9. Headroom in habitable space is a minimum of 7'6".
10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread, 7" maximum rise.
11. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
14. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's.
15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and

I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
19. The Sprinkler System shall be maintained to NFPA #13 Standard.
20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
21. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
22. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
23. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
24. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
25. Ventilation shall meet the requirements of Chapter 12 Sections 1210. of the City's Building Code.
26. All electrical and plumbing permits must be obtained by a Master Licensed holders of their trade.
27. _____
28. _____
29. _____


P. Samuel, Chief of Code Enforcement

cc: Lt. McDougall, PFD
Marge Schmuckal

Applicant: Richard Cr...
Address: 336 Caprice

Date: 6/9/97
C-B-L: 224-A-19

CHECK-LIST AGAINST ZONING ORDINANCE

Date - Existing 1950

Zone Location - R-3

Interior or corner lot -

Proposed Use/Work - erect ^{24' diam} pool & Deck $12 \times 17 = 204$

Sewage Disposal -

$24 \times 24 = 576$

Lot Street Frontage -

780

Front Yard - N/A

Rear Yard - 5' req - 25' shown

Side Yard - 10' req - 25' shown

Projections - 10' req for pool - 13' shown
8' req for deck - 13' shown

Width of Lot -

Height -

Lot Area -

9,891 sq ft

Lot Coverage/ Impervious Surface - 25%

2472.75 sq ft MAX

Area per Family -

$12 \times 16 = 192$

Off-street Parking -

$25 \times 30 = 750$

Loading Bays -

$9 \times 14 = 126$

Site Plan -

$14 \times 24 = 336$

Shoreland Zoning/ Stream Protection -

Flood Plains -

1404

780

2184


AN EXCELLENT WALL ABOVE ALL

The wall joint is certainly one of the most important components in any aboveground pool. It's where the wall is sealed to hold back the thousands of gallons of water the pool contains. We've tested the NEW WAVE wall joint from every angle and here are some of the reasons why it's the best that money can buy:



The New Wave Wall Joint: Built Stronger to Last Longer

- A 6-ply design for superior strength
- A pattern of 25 strategically placed bolts to insure heavy interlock against the greatest water pressure
- Digger 5/16" bolts to ensure no stress pressure
- A full size 2-1/4" wall end overlap for maximum strength
- Computer-designed to eliminate stress fluctuations and guarantee pool integrity at all times



Pool Walls with Hi-Tech Resin Protection

DUOGUARD KOTE

Hi-Tech Interior Pool Wall Protection

No part of the pool is more exposed to condensation than the interior walls. A combination of epoxy and alkylid resin provides a reliable, waterproof, corrosion-resistant surface here with high-tensile strength. The epoxy-resin combination coats the hot-dipped Zincguard 275 galvanized steel substrate evenly, for a long-lasting life guaranteed.



An excellent finish that has proven its effectiveness over time Resin-Shield is used on the exterior of selected pool walls to provide protection and a designer finish


Optimum Wall Corrugation

Just the right amount of corrugation is important. Early on in laboratory tests, we found that while corrugation adds strength and flexibility to metal there is a limit beyond which you're only giving a false sense of strength and stability and simply providing more surface area to corroding elements.

Our optimum choice of profiles for VOGUE pool walls combines maximum strength and flexibility with minimum surface extension.

This all results in dimensionally stable walls that ensure long life for both the surface vinyl resin and inside polyethylene resin coatings.

neither of which will be damaged by a shrinking or expanding substrate.




A Concept that is Practical, Functional and Serviceable

Imagine an aboveground pool that is also easy to service. NEW WAVE incorporates a special feature that makes it practical, functional and serviceable. The snap-in wall and liner retainer. All it takes is just a few minutes to snap out this key component. A wall or liner replacement can then be performed from inside the pool without disturbing the permanent installation deck plants patio or any other setup next to the pool. As for this exclusive feature, NEW WAVE is also your guarantee of the kind of safety and long-lasting durability no other aboveground pool can match.

Stainless Steel Bolts and Screws

Only stainless steel 410 bolts and screws are used to ensure easy maintenance and long-lasting, effective resistance to corrosion.



Unique concept with no sharp edges and protrusions - clip-on


What "Easy to Install" was Meant to Be

Designed with both the do-it-yourselfer and professional pool builder in mind, the patented VOGUE NEW WAVE Uniflok construction uses interlocking modules. The VOGUE NEW WAVE design requires less hardware and 50% fewer parts than conventional aboveground pools. The integrated liner cover also saves on the installation time normally needed for a traditional earth cover. To make matters even easier, your VOGUE NEW WAVE pool comes complete with installation manual.




When a Pool Endures... its Value Endures!

NEW WAVE pools have been designed to withstand the harshest weather conditions. The pool and all key components have been thoroughly tested in an independent laboratory as well as in actual outdoor settings. So we can guarantee unsurpassed durability with total confidence.



Uprights that support the pool - provides additional support for extra hardness to the entire pool.




The built-in cover supports the entire weight on a 5-1/2" foundation.



Vogue Warranty

NEW ERA guarantees all structural components against any manufacturing defects for a period of 30 years, 100% for the first five years and pro-rata the next 25 years, effective from the date the installation is complete.

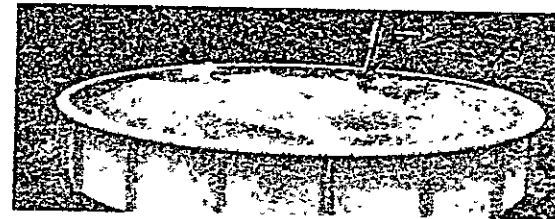

NEW WAVE pools have really been put to the test including a 30-minute, non-stop backhoe endurance ordeal and came through with flying colors!

SYNPRO resin has been tested for resistance to the most extreme temperature changes, from the hottest, dry areas of Arizona, to the salty humid Florida air and all the way up to the cold Canadian north.

Feet	Meters	Code	US Gal	Liters	Ctn
18"	5.49 m	LU131-0018	7,610	28,803	7
21"	6.41 m	LU131-0021*	10,356	39,194	7
24"	7.32 m	LU131-0024	13,525	51,192	7

BASIC GUIDELINES FOR DECK PERMITS

Materials needed to apply for permit:

- 1) Plot Plan - A Bird's eye view of your property showing where all your buildings are located in relationship to the lot lines and each other. You need to show those distances (the front, rear and sides) in feet.
- 2) Construction Plan - Cross Section. What dimensional lumber/materials are being used and what is their make-up?
- 3) Fee - Based on cost of work labor, materials. 25.00 1st 1,000 worth of work, 5.00 each additional 1,000.


The following check-off sheet can be used in most circumstances:

<u>Foundation</u>	<input type="checkbox"/>	Frost wall, min 4' below grade
	<input checked="" type="checkbox"/>	Stone tubes, min 4' below grade, 6" min on footing, hard pan or bedrock
	<input type="checkbox"/>	Other
<u>Sill</u>	<input type="checkbox"/>	Distance between foundation supports
<u>Joist Size</u>	<input type="checkbox"/>	2x6
	<input checked="" type="checkbox"/>	2x8
	<input type="checkbox"/>	2x10
<u>Joist Span</u>	<input type="checkbox"/>	12'
<u>Distance Between Joists</u>	<input checked="" type="checkbox"/>	16"oc
	<input type="checkbox"/>	24"oc
	<input type="checkbox"/>	other
<u>Decking</u>	<input checked="" type="checkbox"/>	5/4
	<input type="checkbox"/>	other/explain
<u>Stair Construction</u>	<input checked="" type="checkbox"/>	10" min tread
	<input type="checkbox"/>	7 3/4" max riser
<u>Guard Height</u>	<input checked="" type="checkbox"/>	36"
	<input type="checkbox"/>	42"

Guards shall be located along open-sided walking surfaces located 15 1/2" above the floor or below grade. Single family - min 36", all others 42", measured vertically above the leading edge of the tread or adjacent walking surface. BOCA 1005.5/1021.2

Balusters /under 4"

Open guards shall have balusters or be of a solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.

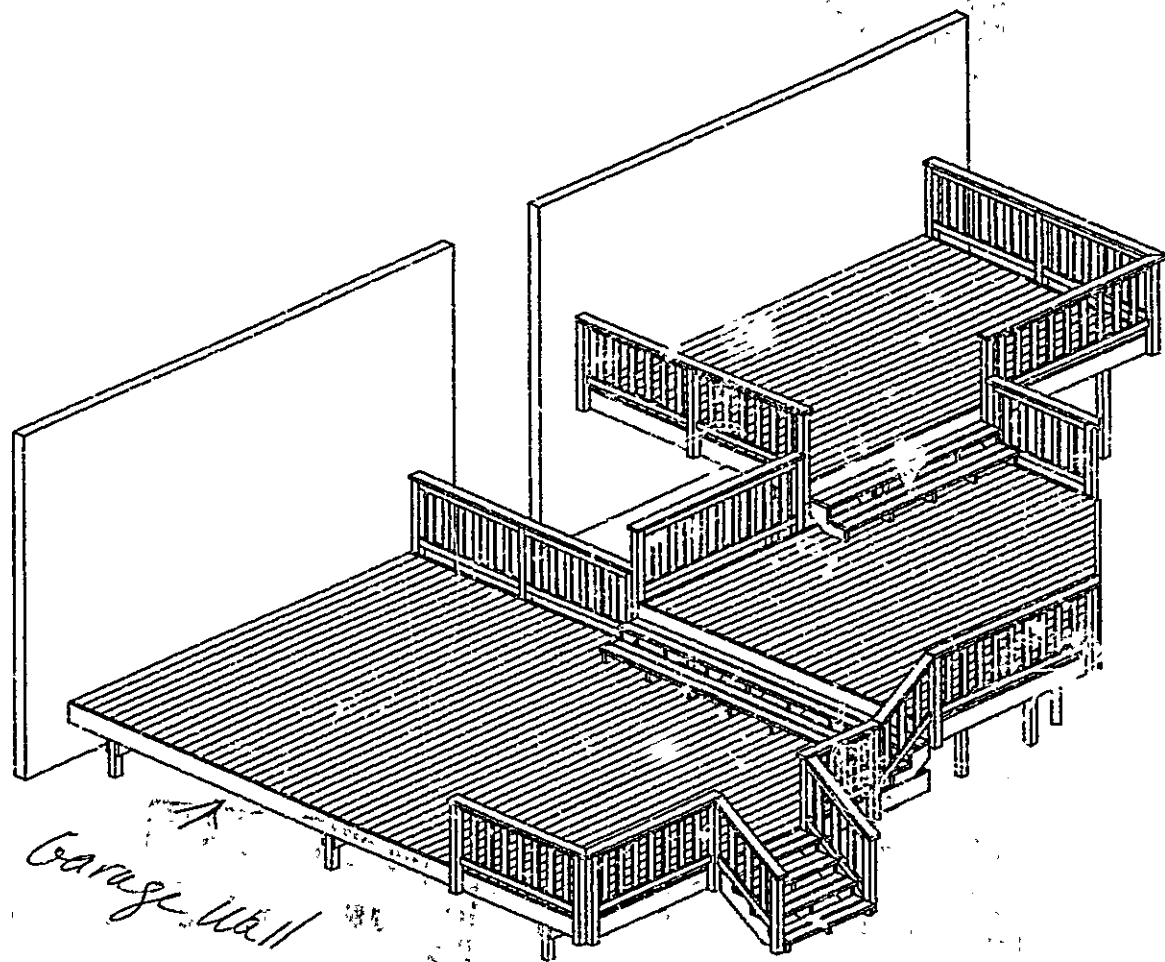

Garage Wall

NOTES

NOTES

NOTIFICATION FOR PERMIT

[This section of the form is crossed out with a large 'X']

Permit No. 50/1352
 Location 336 Calaveras St.
 Owner William W. Kelly
 Date of permit 8/9/50
 Notif. closes 8/29/50 1:50 PM
 Inspn. closing-in 8-29-50, 1:50 PM
 Final Notice
 Final Inspn. Art Raymond
 Cert. of Occupancy Issued None

[This section contains several lines of text, some of which are mirrored or bleed-through from the reverse side of the page. The text is mostly illegible due to the quality of the scan and the nature of the document.]

[Handwritten signature]

INSPECTION COPY

Signature

[Small text at the bottom left corner, likely a reference or filing number.]

AP 336 Capisic Street

August 9, 1950

Mr. John Kelliher, Jr.,
336 Capisic Street
Mr. Vernon Paulsen
15 Plum Street

Gentlemen,

The permit for demolition of side platform and steps on the dwelling at 336 Capisic Street and construction of an enclosed piazza 6'x10' in place thereof is issued herewith based on the information given in the application and subject to the following:

1. The 4x6 sills are required to be all one piece in cross section and to be set on the concrete piers with the 6" dimension upright. Metal pins or dowels should be set in the top of the concrete piers for anchorage of sills to them.
2. The 2x6 floor timbers are required to rest on top of the sills or to be notched over no less than 2x3 nailing pieces spiked to the sides of the sills at the bottom edge.
3. If any of window openings in the piazza are to be more than 4' wide either 2-2x6s or a 4x6 on edge is required for support of rafters over the opening.
4. No wallboard or sheathing is to be applied to walls or ceiling until notification has been given this department for an inspection and authorization to "close-in" the piazza has been given on a green tag left at the job.

Very truly yours,

Warren McDonald
Inspector of Buildings.

AJS/B



(R) RESIDENCE ZONE - 0

APPLICATION FOR PERMIT

Class of Building or Type of Structure Third Class
Portland, Maine, March 17, 1950

PERMIT ISSUED
00355
MAR 28 1950
CITY OF PORTLAND

To the INSPECTOR OF BUILDINGS, PORTLAND, MAINE

The undersigned hereby applies for a permit to erect ~~and occupy~~ the following building ~~structure~~ in accordance with the Laws of the State of Maine, the Building Code and Zoning Ordinance of the City of Portland, plans and specifications, if any, submitted herewith and the following specifications:

Location Capisic Street Within Fire Limits? no Dist. No. _____
 Owner's name and address The Minat Corp., 220 Cumberland Avenue Telephone 4-8013
 Lessee's name and address _____ Telephone _____
 Contractor's name and address Owners Telephone _____
 Architect _____ Specifications Standard Plan Plans yes No. of sheets 1
 Proposed use of building Dwelling house No. families 1
 Last use _____ No. families _____
 Material _____ No. stories _____ Heat _____ Style of roof _____ Roofing _____
 Other buildings on same lot _____
 Estimated cost \$ 5,500 Fee \$ 6.00
6,500 7.00

General Description of New Work

To construct $1\frac{1}{2}$ -story frame dwelling 24' x 38'.

It is understood that this permit does not include installation of heating apparatus which is to be taken out separately by and in the name of the heating contractor. **PERMIT TO BE ISSUED TO** The Minat Corp.

Details of New Work

Is any plumbing involved in this work? yes Is any electrical work involved in this work? yes
 Height average grade to top of plate 13' Height average grade to highest point of roof 24'
 Size, front 38' depth 24' at least 4' below grade No. stories 1\frac{1}{2} solid or filled land? solid earth or rock? earth
 Material of foundation concrete Thickness, top 10" bottom 12" cellar yes
 Material of underpinning _____ Height _____ Thickness _____
 Kind of roof Pitch-gable Rise per foot 10" Roof covering Asphalt Class C Und Lab
 No. of chimneys 1 Material of chimneys brick of lining tile Kind of heat steam fuel oil
 Framing lumber—Kind hemlock Dressed or full size? dressed
 Corner posts 4x6 Sills box Girt or ledger board? _____ Size _____
 Girders yes Size 6x8 full size Columns under girders Lally Size 3\frac{1}{2}" Max. on centers 7'
 Studs (outside walls and carrying partitions) 2x4-16" O. C. Bridging in every floor and flat roof span over 8 feet.
 Joists and rafters: 1st floor 2x8, 2nd 2x8 stairway - no dormer, 3rd _____, roof 2x8
 On centers: 1st floor 16", 2nd 16", 3rd _____, roof 24"
 Maximum span: 1st floor 12', 2nd 12', 3rd _____, roof 12'

If one story building with masonry walls, thickness of walls? _____ height? _____

If a Garage

No. cars now accommodated on same lot _____, to be accommodated _____ number commercial cars to be accommodated _____
Will automobile repairing be done other than minor repairs to cars habitually stored in the proposed building? _____

APPROVED:

OK-3/25/50-AGJ

Miscellaneous

Will work require disturbing of any tree on a public street? no
Will there be in charge of the above work a person competent to see that the State and City requirements pertaining thereto are observed? yes

The Minat Corp.

Signature of owner by: _____

INSPECTION COPY

COPY

CITY OF PORTLAND, MAINE
Department of Building Inspection

Certificate of Occupancy

Date of Issue 6/27/50



Issued to The Kinat Corp.

This is to certify that the building, premises, or part thereof, indicated below, and built—
~~at~~ ~~changed address~~ at 340-344 Capric Street
under Building Permit No. 50/355, has had final inspection, has been found to conform substan-
tially to requirements of Zoning Ordinance and Building Code of the City, and is hereby approved
for occupancy, limited or otherwise, as indicated below.

PORTION OF BUILDING OR PREMISES

Entire Building

APPROVED OCCUPANCY

1-family dwelling house

Limiting Conditions:

This certificate supersedes
certificate issued
Approved 6/26/50:

A. J. Hamilton

Inspector of Buildings

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from
owner to owner when property changes hands. Cop. will be furnished to owner or lessee for one dollar.

STATEMENT ACCOMPANYING APPLICATION FOR BUILDING PERMIT

for dwelling house

at 340-344 Canisic St.

Date 3/17/50

1. In whose name is the title of the property now recorded? The Minat Coro.
2. Are the boundaries of the property in the vicinity of the proposed work shown clearly on the ground, and how? stakes
3. Is the outline of the proposed work now staked out upon the ground? no If not, will you notify the Inspection Office when the work is staked out and before any of the work is commenced? yes
4. What is to be maximum projection or overhang of eaves or drip? _____
5. Do you assume full responsibility for the correctness of the location plan or statement of location filed with this application, and does it show the complete outline of the proposed work on the ground, including bay windows, porches and other projections? yes
6. Do you assume full responsibility for the correctness of all statements in the application concerning the sizes, design and use of the proposed building? yes
7. Do you understand that in case changes are proposed in the location of the work or in any of the details specified in the application that a revised plan and application must be submitted to this office before the changes are made? yes

[Signature]

WARNING !!!

IF'S BUILDING PERMIT IS ISSUED
SUBJECT TO SPECIAL CONDITION:

THAT NO CONCRETE SHALL BE POURED IN FOUNDATION FORMS AND NO
LAYING OF UNIT MASONRY IN FOUNDATION WALLS SHALL BE STARTED UNTIL
NOTICE HAS BEEN GIVEN AT THE DEPARTMENT OF BUILDING INSPECTION OF
READINESS TO START ACTUAL MASONRY WORK, AND UNTIL RE-CHECK OF
LOCATION HAS BEEN MADE BY INSPECTOR.

* * *

Original markings of corners of lot and especially stakes on
street line set by Dept. of Public Works must be kept intact and
easily accessible for re-check--not covered by excavated earth
or building materials. Otherwise the "go-ahead" cannot be given.
Dept. of Public Works cannot re-set their stakes.

* * *

Obviously the notice for re-check must be given at such a time
as to allow reasonable opportunity to make re-check.

Warren McDonald
Inspector of Buildings

Permit No. 5717



FILL IN AND SIGN WITH INK

APPLICATION FOR PERMIT FOR HEATING, COOKING OR POWER EQUIPMENT

Portland, Maine, 6-16/50

PERMIT ISSUED 00867 JUN 8 1950 CITY of PORTLAND

The INSPECTOR OF BUILDINGS, PORTLAND, MAINE

N-ATH

The undersigned hereby applies for a permit to install the following heating, cooking or power equipment in accordance with the Laws of Maine, the Building Code of the City of Portland, and the following specifications:

Location 342 Capisic Use of Building house No. Stories 1/2 New Building Existing " Name and address of owner of appliance Minat Corp 220 Cumberland Ave Installer's name and address Pallotta Oil Co Telephone 4-2671

General Description of Work

To install Oil burner in Steam Boiler

IF HEATER, OR POWER BOILER

Location of appliance or source of heat by others Type of floor beneath appliance If wood, how protected? Minimum distance to wood or combustible material, from top of appliance or casing top of furnace From top of smoke pipe From front of appliance From sides or back of appliance Size of chimney flue Other connections to same flue If gas fired, how vented? Rated maximum demand per hour

IF OIL BURNER

Name and type of burner Fluid Heat Pressure Labelled by underwriter's laboratories? Yes Will operator be always in attendance? No Does oil supply line feed from top or bottom of tank? Bottom Type of floor beneath burner Concrete Location of oil storage Basement Number and capacity of tanks 1- 275 Gal. If two 275-gallon tanks, will three-way valve be provided? Will all tanks be more than five feet from any flame? Yes How many tanks fire proofed? Total capacity of any existing storage tanks for furnace burners none

IF COOKING APPLIANCE

Location of appliance Kind of fuel Type of floor beneath appliance If wood, how protected? Minimum distance to wood or combustible material from top of appliance From front of appliance From sides and back From top of smokepipe Size of chimney flue Other connections to same flue Is hood to be provided? If so, how vented? If gas fired, how vented? Rated maximum demand per hour

MISCELLANEOUS EQUIPMENT OR SPECIAL INFORMATION

Amount of fee enclosed? 2.00 (\$1.00 for one heater, etc., 50 cents additional for each additional heater, etc. in same building at same time.)

APPROVED: 6-7-50 AB

Will there be in charge of the above work a person competent to see that the State and City requirements pertaining thereto are observed?

INSPECTION COPY

Signature of Installer Pallotta Oil Co E.J.P.



FILL IN AND SIGN WITH INK

APPLICATION FOR PERMIT FOR HEATING, COOKING OR POWER EQUIPMENT

Portland, Maine, June 1, 1950

PERMIT ISSUED
00831
JUN 5 1950
CITY of PORTLAND

To the INSPECTOR OF BUILDINGS, PORTLAND, MAINE

N-ATH

The undersigned hereby applies for a permit to install the following heating, cooking or power equipment in accordance with the Laws of Maine, the Building Code of the City of Portland, and the following specifications:

Location 348 Capisic Street Use of Building dwelling house No. Stories 1 New Building Existing
Name and address of owner of appliance The Minat Corp., 220 Cumberland Avenue
Installer's name and address Louis Anderson & Son, 25 Clinton St., Portland Telephone 3-4387

General Description of Work

To install steam heating system

IF HEATER, OR POWER BOILER

Location of appliance or source of heat basement Type of floor beneath appliance concrete
If wood, how protected? _____ Kind of fuel oil
Minimum distance to wood or combustible material, from top of appliance or casing top of furnace 30"
From top of smoke pipe 21" From front of appliance over 4' From sides or back of appliance over 3'
Size of chimney flue 8x8 Other connections to same flue none
If gas fired, how vented? _____ Rated maximum demand per hour _____

IF OIL BURNER

Name and type of burner _____ of _____ Labeled by underwriter's laboratories? _____
Will operator be always in presence? _____ Does oil supply line feed from top or bottom of tank? _____
Type of floor beneath burner _____
Location of oil storage _____ Number and capacity of tanks _____
If two 275-gallon tanks, a three-way valve be provided? _____
Will all tanks be more than five feet from any flame? _____ How many tanks fire proofed? _____
Total capacity of any existing storage tanks for furnace burners _____

IF COOKING APPLIANCE

Location of appliance _____ Kind of fuel _____ Type of floor beneath appliance _____
If wood, how protected? _____
Minimum distance to wood or combustible material from top of appliance _____
From front of appliance _____ From sides and back _____ From top of smokepipe _____
Size of chimney flue _____ Other connections to same flue _____
Is hood to be provided? _____ If so, how vented? _____
If gas fired, how vented? _____ Rated maximum demand per hour _____

MISCELLANEOUS EQUIPMENT OR SPECIAL INFORMATION

Amount of fee enclosed? 2.00 (\$1.00 for one heater, etc., 50 cents additional for each additional heater, etc., in same building at same time.)

APPROVED:

6-2-50 AC

Will there be in charge of the above work a person competent to see that the State and City requirements pertaining thereto are observed? yes

Signature of Installer

Louis O Anderson Sr

copy

Permit No. 50/831

Location ³³⁶⁻³⁴⁰ 340 Capisic St

Owner The Minut Corp.

Date of permit 6/5/50

Approved 6-26-50 S.C.

NOTES

[The notes section is mostly blank, with a large diagonal line drawn across it.]