

PERMIT # 002300 TOWN OF Portland BUILDING PERMIT APPLICATION MAP # _____ LOT# _____

Please fill out any part which applies to job. Proper plans must accompany form.

Owner: Cheryl Works

Address: 86 Caron St., Portland

LOCATION OF CONSTRUCTION 86 Caron St.

CONTRACTOR: Robert Works SUBCONTRACTORS: 797-4580-or-7372

ADDRESS: same

Est. Construction Cost: \$2400 Type of Use: single family

Part Use: _____

Building Dimensions L _____ W _____ Sq. Ft. _____ # Stories: _____ Lot Size: _____

Is Proposed Use: _____ Seasonal _____ Condominium _____ Apartment _____

Conversion - Explains Four slab only (for EXX 2 car garage and

workshop) 1 plot plan

COMPLETE ONLY IF THE NUMBER OF UNITS WILL CHANGE submitted.

Residential Buildings Only: _____

Of Dwelling Units _____ # Of New Dwelling Units _____

Foundations:

1. Type of Soil: _____
2. Set Backs - Front _____ Rear _____ Side(s) _____
3. Footings Size: _____
4. Foundation Size: _____
5. Other: _____

Floors

1. Sills Size: _____ Sills must be anchored.
2. Girder Size: _____
3. Lally Column Spacing: _____ Size: _____
4. Joists Size: _____ Spacing 16" O.C.
5. Bridging Type: _____ Size: _____
6. Floor Sheathing Type: _____ Size: _____
7. Other Material: _____

Exterior Walls:

1. Studding Size _____ Spacing _____
2. No. windows _____
3. No. Doors _____
4. Header Size: _____ Span(s) _____
5. Bracing: Yes _____ No _____
6. Corner Posts Size _____
7. Insulation Type _____ Size _____
8. Sheathing Type _____ Size _____
9. Siding Type _____ Weather Exposure _____
10. Masonry Materials _____
11. Metal Materials _____

Interior Walls:

1. Studding Size _____ Spacing _____
2. Header Size: _____ Span(s) _____
3. Wall Covering Type _____
4. Fire Wall If required _____
5. Other Materials _____

For Official Use Only

PERMIT ISSUED

Date Aug 21, 1989

Subdivision Name _____

Block AUG 28 1989

Permit Expiration: _____

Ownership: Public

City Of Portland

Inside Fire Limits _____

Blug Code _____

Ticse Limit _____

Estimated Cost \$2400

Value/Structure _____

Fee \$30.00

Ceiling:

1. Ceiling Joists Size: _____
2. Ceiling Strapping Size _____ Spacing _____
3. Type Ceiling: _____
4. Insulation Type _____ Size _____
5. Ceiling Height: _____

Roof:

1. Truss or Rafter Size _____ Span _____
2. Sheathing Type _____ Size _____
3. Roof Covering Type _____
4. Other: _____

Chimneys:

Type: _____ Number of Fire Places _____

Heating:

Type of Heat: _____

Electrical:

Service Entrance Size: _____ Smoke Detector Required Yes _____ No _____

Plumbing:

1. Approval of soil test if required Yes _____ No _____
2. No. of Tubs or Showers _____
3. No. of Flushes _____
4. No. of Lavatories _____
5. No. of Other Fixtures _____

Swimming Pools:

1. Type: _____
2. Pool Size: _____ x _____ Square Footage _____
3. Must conform to National Electrical Code and State Law.

Zoning:

District _____ Street Frontage Req: _____ Provided _____

Required Setbacks: Front _____ Back _____ Side _____ Side _____

Review Required:

Zoning Board Approval: Yes _____ No _____ Date: _____

Planning Board Approval: Yes _____ No _____ Date: _____

Conditional Use: _____ Variance _____ Site Plan _____ Subdivision _____

Shore and Floodplain Mgmt _____ Special Exception _____

Other: (Explain) _____

Date Approved _____

Permit Received By Nancy Groszman

Signature of Applicant Robert Works Date 8-21-89

Signature of CEO 4 Date _____

Inspection Dates _____

PERMIT # 002500 TOWN OF Portland BUILDING PERMIT APPLICATION MAP # _____ LOT# _____

Please fill out any part which applies to job. Proper plans must accompany form.

Owner: Cheryl Works

Address: 56 Caron St., Portland

LOCATION OF CONSTRUCTION 86 Caron St.

CONTRACTOR: Robert Works SUBCONTRACTORS: 797-4580-OR-781-3372

ADDRESS: s.unc

Est. Construction Cost: \$2400 Type of Use: single family

Past Use: _____

Building Dimensions: L W Sq. Ft. # Stories Lot Size

Is Proposed Use: Seasonal Condominium Apartment

Conversion - Explain Four slab only (for 2X2 car garage and

COMPLETE ONLY IF THE NUMBER OF UNITS WILL CHANGE workshop) 1 plot plan

Residential Buildings Only: _____ submitted.

Of Dwelling Units: _____ # Of New Dwelling Units: _____

Foundation

1. Type of Soil: _____
2. Set Backs - Front _____ Rear _____ Side(s) _____
3. Footings Size: _____
4. Foundation Size: _____
5. Other: _____

Floor

1. Sills Size: _____ Sills must be anchored
2. Girder Size: _____
3. Lally Column Spacing: _____ Size: _____
4. Joists Size: _____ Spacing 16" O.C.
5. Bridging Type: _____ Size: _____
6. Floor Sheathing Type: _____ Size: _____
7. Other Material: _____

Exterior Walls

1. Studding Size _____ Spacing _____
2. No. windows _____
3. No. Doors _____
4. Header Sizes _____ Span(s) _____
5. Bracing: Yes _____ No _____
6. Corner Posts Size _____
7. Insulation Type _____ Size _____
8. Sheathing Type _____ Size _____
9. Siding Type _____ Weather Exposure _____
10. Masonry Materials _____
11. Metal Materials _____

Interior Walls

1. Studding Size _____ Spacing _____
2. Header Sizes _____ Span(s) _____
3. Wall Covering Type _____
4. Fire Wall if required _____
5. Other Materials _____

For Official Use Only

Date Aug 21, 1989 Subdivision: Yes / No _____
 Inside Fire Limits _____ Name _____
 Bldg Code _____ Lot _____
 Time Limit _____
 Estimated Cost: \$2400 Permit Expired _____
 Value Structure _____ Ownership: _____ Public _____
 Fee \$40.00 _____

PERMIT ISSUED
 AUG 25 1989

City Of Portland

- Ceiling:**
1. Ceiling Joists Size: _____
 2. Ceiling Strapping Size _____ Spacing _____
 3. Type Ceilings _____
 4. Insulation Type _____ Size _____
 5. Ceiling Height: _____

- Roof:**
1. Truss or Rafter Size _____ Span _____
 2. Sheathing Type _____ Size _____
 3. Roof Covering Type _____
 4. Other _____

- Chimneys:**
- Type: _____ Number of Fire Places _____

- Heating:**
- Type of Heat: _____

- Electrical:**
- Service Entrance Size: _____ Smoke Detector Required Yes _____ No _____

- Plumbing:**
1. Approval of soil test if required Yes 25 No _____
 2. No. of Tubs or Showers _____
 3. No. of Flushes _____
 4. No. of Lavatories _____ 00-2
 5. No. of Other Fixtures _____

- Swimming Pools:**
1. Type: _____
 2. Pool Size: _____ Square Footage _____
 3. Must conform to National Electrical Code and State Law.

- Zoning:**
- District R-2 Street Frontage Req: _____ Provided: _____
 Required Setbacks: Front _____ Back _____ Side _____ Side _____

- Review Required:**
- Zoning Board Approval: Yes _____ No _____ Date: _____
 Planning Board Approval: Yes _____ No _____ Date: _____
 Conditional Use: _____ Variance _____ Site Plan _____ Subdivision _____
 Slope and Floodplain Mgmt _____ Special Exception _____
 Other (Explain) _____

PERMIT RECEIVED
 WILL LETTER WD Mc 8-21-89

Permit received By Nancy Grossman

Signature of Applicant Robert Works Date 8-21-89

Signature of CEO _____ Date _____

Inspection Dates _____

White-Tax Assessor Yellow-GPCOG White Tag FE Copyright GPCOG 1987

PLOT PLAN



FEES (Breakdown From Front)
Base Fee \$ 25.00 _____
Subdivision Fee \$ _____
Site Plan Review Fee \$ _____
Other Fees \$ 5.00 _____
(Explain) _____
Late Fee \$ _____

Type	Inspection Record	
	Date	
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

COMMENTS 9-8-89 Slab has already been poured w/alt. to distance 10' to

Signature of Applicant *Robert Under*

Date 8/2/89

BUILDING PERMIT REPORT

ADDRESS: 86 Caron ST.

DATE: 21 Aug, '89

REASON FOR PERMIT: Place Slab For Two(2)
Car detached garage.

BUILDING OWNER: Cheryl Works

CONTRACTOR: _____

PERMIT APPLICANT: _____

APPROVED: */ _____ DENIED: _____

CONDITION OF APPROVAL OR DENIAL:

- * 1.) Before concrete for foundation is placed, approvals from Public Works and Inspection Services must be obtained.
- 2.) Precaution must be taken to protect concrete from freezing.
- 3.) All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with self-closers.
- 4.) Each apartment shall have access to two(2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 5.) The boiler shall be protected by enclosing with one(1) hour fire rated construction including fire doors and ceiling, or by placing over the boiler, two(2) residential sprinkler heads supplied from the domestic water.
- 6.) Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside opening without the use of separate tools. Where windows are provided as a means of egress or rescue, they shall have a sill height not more than 44 inches (1118 mm) above the floor. All egress or rescue windows from sleeping rooms must have minimum net clear openings of 5.7 square feet (0.53m²). The minimum net clear opening height dimension shall be 24 inches (610 mm). The minimum net clear opening width dimension shall be 20 inches (508 mm).
- 7.) In addition to any automatic fire alarm system required by Sections 1018.3.5, a minimum of one single station smoke detector shall be installed in each guest room, suite or sleeping area in buildings of Use Groups R-1 and I-1 and in dwelling units in the immediate vicinity of the bedrooms in buildings of Use Group R-2 or R-3. When actuated, the detector shall provide an alarm suitable to warn the occupants within the individual unit (see Section 1717.3.1).


In buildings of Use Groups R-1 and R-2 which have basements, an additional smoke detector shall be installed in the basement. In buildings of Use Group R-3, smoke detectors shall be required on every story of the dwelling unit, including basements.

In dwelling units with split levels, a smoke detector installed on the upper level shall suffice for the adjacent lower level provided the lower level is less than one full story below the upper level. If there is an intervening door between the adjacent levels, a smoke detector shall be installed on both levels.


All detectors shall be installed in an approved location. Where more than one detector is required to be installed within an individual dwelling unit, the detectors shall be wired in such a manner that the actuation of one alarm will actuate all the alarms in the individual unit.

- 8.) Private garages located beneath rooms in buildings of Use Groups R-1, R-2, R-3 or I-1 shall have walls, partitions, floors and ceilings separating the garage space from the adjacent interior spaces constructed of not less than 1-hour fireresistance rating. Attached private garages shall be completely separated from the adjacent interior spaces and the attic area by means of 1/2-inch gypsum board or equivalent applied to the garage side. The sills of all door openings between the garage and adjacent interior spaces shall be raised not less than 4 inches (102 mm) above the garage floor. The door opening protectives shall be 1 3/4-inch solid core wood doors or approved equivalent.
- 9.) A guardrail system located near the open side of deck or elevated walking surfaces shall be constructed. Guards in buildings of Use Group R-3 shall be not less than 36 inches in height. Open guards shall have intermediate rails, balusters or other construction such that a sphere with a diameter of 6 inches cannot pass through any opening.
- 10.) Section 25-135 of the Municipal Code for the City of Portland states: "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year.
- 11.) The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 M.R.S.A. refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.

Sincerely,

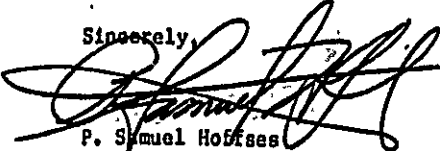
P. Samuel Hoffas
Chief of Inspection Services

/el
11/16/88

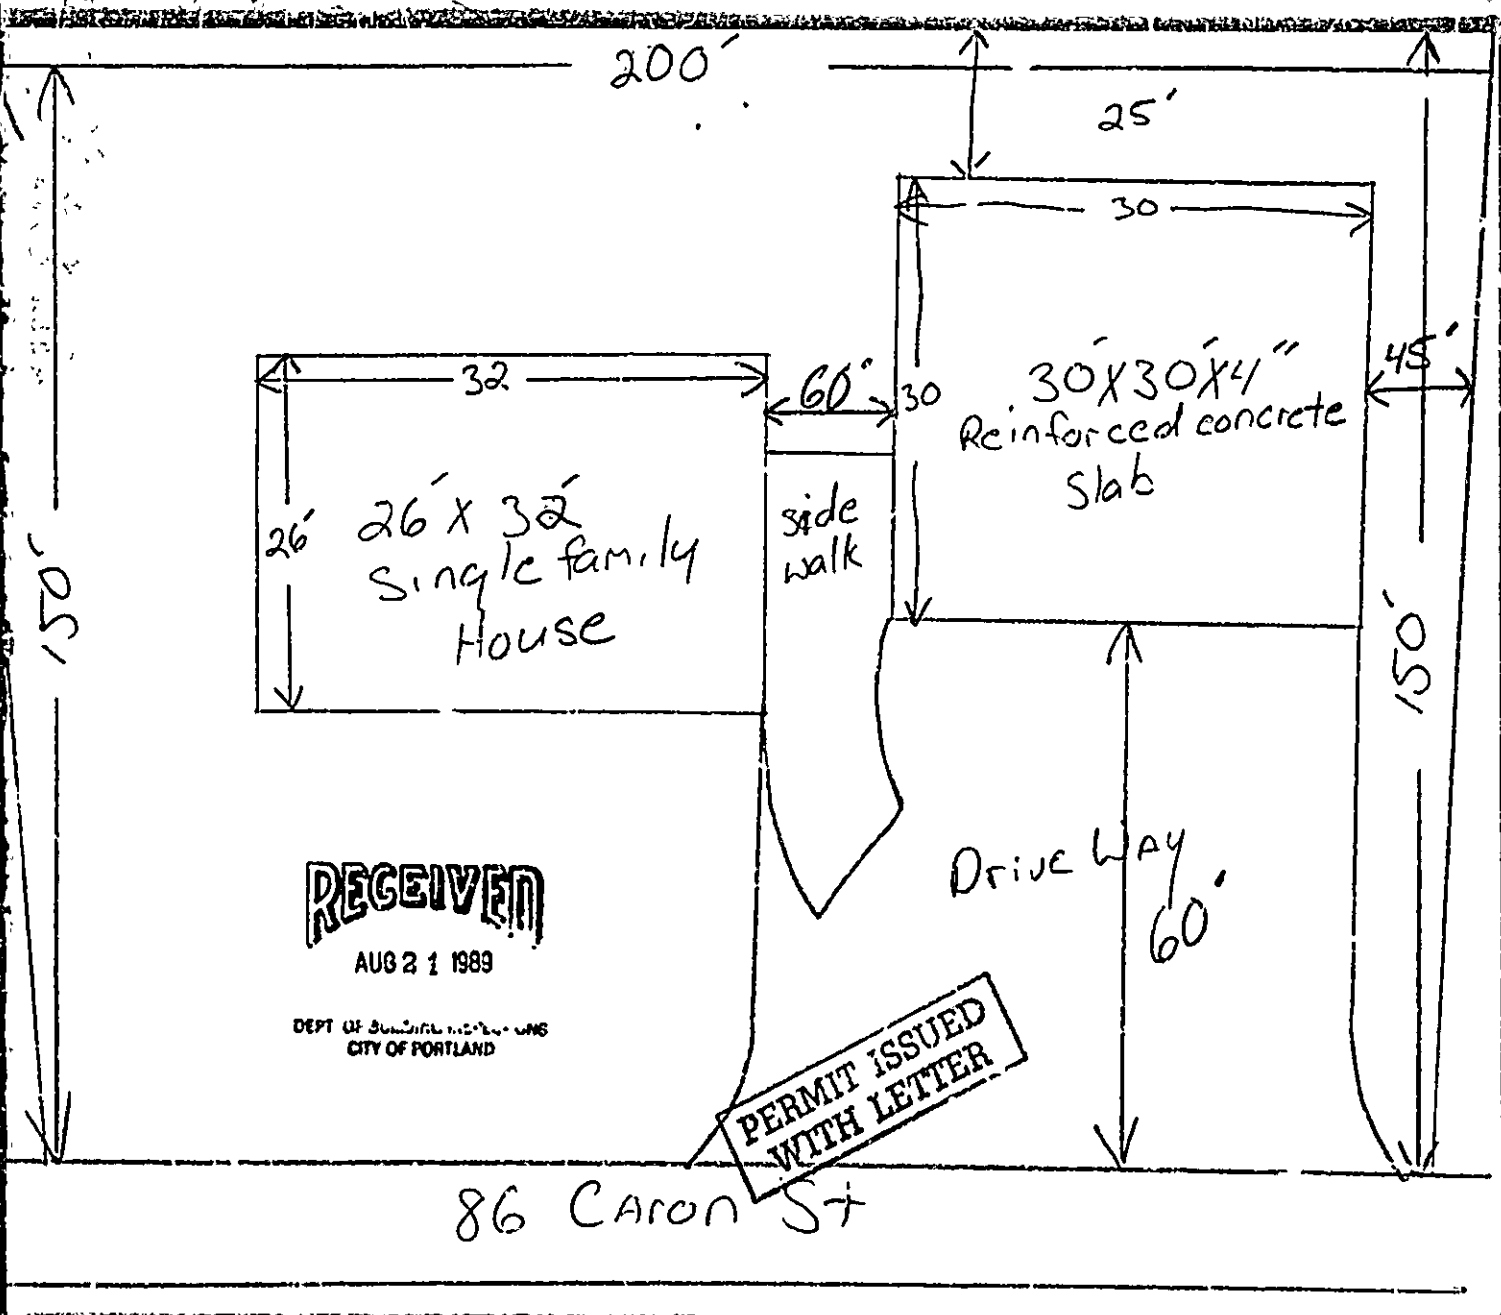

86 CARON ST