


*** DOOR SCHEDULE ***

#	SIZE	DOOR		THRESH	FRAME	RATING	HARDWARE	REMARKS
		Type	Material					
1	3'x7'x1-3/4"	1	Insul. Metal	Metal				Exit
2		1	Wood			60 Min		Match # 7
3		2	Metal			45Min		Classroom
4		2	Wood			20 Min		Classroom
5		1	Wood			20 Min		Passage
6		2	Wood			20 Min		Classroom
7		1	Wood			60 Min		Relocate from 2 floor @ demo/d stair
8		2	Wood			20 Min		Classroom- Reverse swing
9		2	Wood			20 Min		Office Entry
10		1	Wood			20 Min		Passage
11		1	Insul Met					Exit
12		1	Insul Met					Exit
13		1	Insul Met					Exit
14		1	Insul Met					Exit

- Notes for new doors
- All doors to have closers
 - All doors to have smoke and draft control per UL 1784 & NFPA 105
 - All corridor doors to meet NFPA 252 and UI 10C
 - All door hardware to meet accessibility standards
 - All door hardware to meet accessibility standards
 - Verify all relocated doors meet ratings

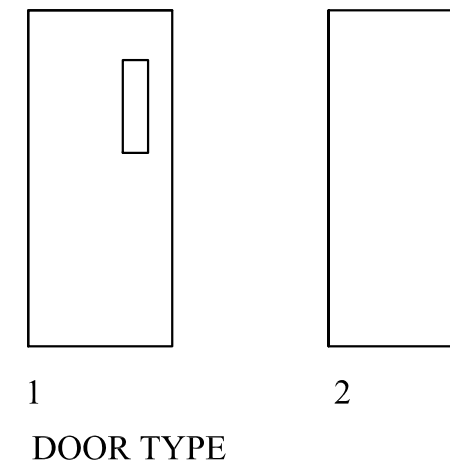

OWNER: CHABOT ST. LLC
100 Silver Street
Portland, Maine 04101

ARCHETYPE, P.A. ARCHITECTS
48 Union Wharf Portland, Maine 04101
(207) 772-6022 Fax (207) 772-4056

Project: 43 BAXTER BLVD.
PORTLAND, MAINE

Revisions:
05/15/10- PRELIM. PRICING
06/28/10- PERMIT

Date: MAY 15, 2010
Scale: 1/8" = 1'-0"
FLOOR PLANS

A1.00