


*** FINISH SCHEDULE ***

#	DESCRIPTION	FLOOR	BASE	WALL	CEIL.	#	DESCRIPTION	FLOOR	BASE	WALL	CEIL.
01	Waiting Room	CPT-1	VINYL	PT-1	ACT	22	Restroom	VCT-1 & 2	VINYL	PT-2/3	ACT
02	Corridor	VCT-1 & 2	VINYL	PT-1	ACT	23	Closet	VCT-1 & 2	VINYL	PT-2	GYP
03	Exam Room 1	VCT-1 & 2	VINYL	PT-2/3	ACT	24	Check In	VCT-1 & 2	VINYL	PT-1	ACT
04	Exam Room 2	VCT-1 & 2	VINYL	PT-2/3	ACT	25	Check In	VCT-1 & 2	VINYL	PT-1	ACT
05	Exam Room 3	VCT-1 & 2	VINYL	PT-2/3	ACT	26	Check Out	VCT-1 & 2	VINYL	PT-1	ACT
06	Exam Room 4	VCT-1 & 2	VINYL	PT-2/3	ACT	27	Open Office	VCT-1 & 2	VINYL	PT-1	ACT
07	Exam Room 5	VCT-1 & 2	VINYL	PT-2/3	ACT	28	Closet	VCT-1 & 2	VINYL	PT-2	GYP
08	Case Manager	CPT-1	VINYL	PT-2/3	ACT	29	Manager's Office	CPT-1	VINYL	PT-2/3	ACT
09	Exam Room 6	VCT-1 & 2	VINYL	PT-2/3	ACT	30	Closet	VCT-1 & 2	VINYL	PT-2	GYP
10	Work Stations	VCT-1 & 2	VINYL	PT-1	ACT	31	Closet	VCT-1 & 2	VINYL	PT-2	GYP
11	Exam Room 7	VCT-1 & 2	VINYL	PT-2/3	ACT	32	Medical Records	VCT-1 & 2	VINYL	PT-2/3	ACT
12	Office 1	CPT-1	VINYL	PT-2/3	ACT	33	Clean Utility	VCT-1 & 2	VINYL	PT-2/3	ACT
13	Office 2	CPT-1	VINYL	PT-2/3	ACT	34	Soiled	VCT-1 & 2	VINYL	PT-2/3	GYP
14	Exam Room 8	VCT-1 & 2	VINYL	PT-2/3	ACT	35	Closet	VCT-1 & 2	VINYL	PT-2	GYP
15	Elec	VCT-1	VINYL	PT-2	ACT	36	Exam Room 9	VCT-1 & 2	VINYL	PT-2/3	ACT
16	Data	VCT-1	VINYL	PT-2	ACT	37	Housekeeping	VCT-1 & 2	VINYL	PT-2	ACT
17	Staff Restroom	VCT-1 & 2	VINYL	PT-2/3	ACT	38	Exam Room 10	VCT-1 & 2	VINYL	PT-2/3	ACT
18	Office 3	CPT-1	VINYL	PT-2/3	ACT	39	Restroom	VCT-1 & 2	VINYL	PT-2/3	ACT
19	Office 4	CPT-1	VINYL	PT-2/3	ACT	40	Nurse Station	VCT-1 & 2	VINYL	PT-1	ACT
20	Office 5	CPT-1	VINYL	PT-2/3	ACT	41	Referral Office	CPT-1	VINYL	PT-2/3	ACT
21	Staff Lounge	VCT-1 & 2	VINYL	PT-3	ACT	42	Corridor	VCT-1 & 2	VINYL	PT-1	ACT

FINISH KEY				
	MANUFACTURER	STYLE	COLOR	REMARKS
ACT	Armstrong	TYPE 1-MESA 686 ANGLED TEGULAR TYPE 2-FINE FISSURED 1732 ANGLED TEGULAR SIZE AS INDICATED ON CEILING PLAN	White	
CPT-1	Mannington	Ways II	Cabinet	
PT-1	Benjamin Moore	Eggshell	HC-48 Bradstreet Beige	
PT-2	Benjamin Moore	Eggshell	963 Maritime White	
PT-3	Benjamin Moore	Eggshell	1606 Cobblestone Path	Accent Wall Opposite door
VCT-1	Mannington	Essentials	109 Brownstone	25%-Pattern TBD when installed
VCT-2	Mannington	Essentials	127 Warm Beige	75%-Pattern TBD when installed
VINYL	Johnsonite	4" Vinyl Base	22-Pearl	
PLAM	Wilsonart	4883-38	Sable Soapstone	All counters to be post-formed

*** DOOR SCHEDULE ***

No.	LOCATION	SIZE W x H x T	DOOR		FINISH	THRESH	FRAME		REMARKS
			Type	Material			Material	Finish	
01	Waiting/Corridor (Office)	4'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	Card Reader/Closer
02	Waiting/Corridor	4'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	Card Reader/Closer
03	Exam Room 1	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
04	Exam Room 2	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
05	Exam Room 3	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
06	Exam Room 4	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
07	Exam Room 5	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
08	Case Manager	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
09	Exam Room 6	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
10	Not Used								
11	Exam Room 7	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
12	Office 1	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
13	Office 2	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
14	Exam Room 8	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
15	Elec	3'-0" x 7'-0" x 1 3/4"	B	HM	Ptd.		HM	Ptd.	
16	Data	3'-0" x 7'-0" x 1 3/4"	B	HM	Poly		HM	Ptd.	
17	Staff Restroom	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
18	Office 3	3'-0" x 7'-0" x 1 3/4"	B	SCW	Ptd.		HM	Ptd.	
19	Office 4	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
20	Office 5	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
21	Staff Lounge	4'-0" x 7'-0" x 1 3/4"	D	SCW	Poly		HM	Ptd.	
22	Restroom	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
23	Closet	2x (2'-0" x 7'-0" x 1 3/4")	B	SCW	Poly		HM	Ptd.	Slider
24-27	Not Used								
28	Closet	2x (3'-0" x 7'-0" x 1 3/4")	B	SCW	Poly		HM	Ptd.	
29	Managers Office	3'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	
30	Closet	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
31	Closet	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
32	Medical Records	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
33	Clean Utility	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
34	Soiled	3'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	1 HOUR RATED
35	Closet	(2x)3'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	
36	Exam Room 9	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
37	Housekeeping	3'-8" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
38	Exam Room 10	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
39	Restroom	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
40	Not Used								
41	Referral Office	3'-2" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	
42A	Corridor	3'-0" x 7'-0" x 1 3/4"	C	SCW	Poly		HM	Ptd.	Key Pad/Closer
42B	Corridor	3'-0" x 7'-0" x 1 3/4"	B	SCW	Poly		HM	Ptd.	1 HOUR RATED Card Reader

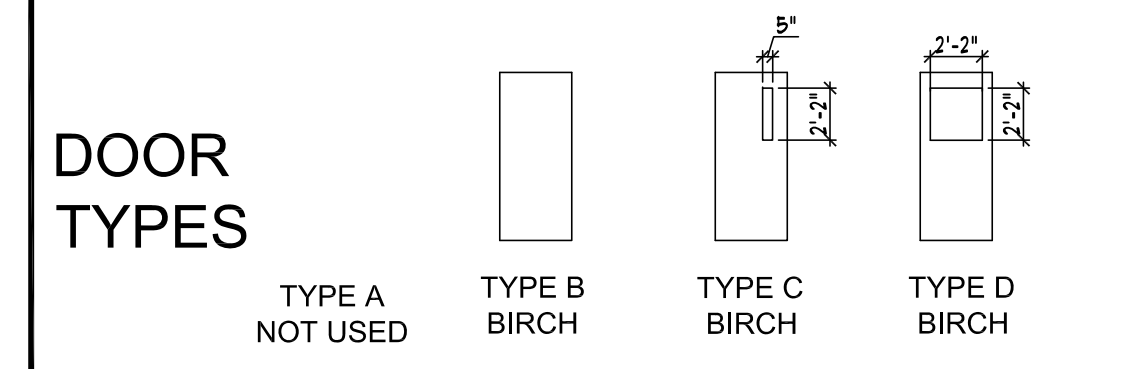

OWNER:
CHABOT ST. LLC
100 Silver Street
Portland, Maine 04101

ARCHETYPE, P.A.
ARCHITECTS
48 Union Wharf Portland, Maine 04101
(207) 772-6022 Fax (207) 772-4056

Project:
MERCY
43 BAXTER BLVD.
PORTLAND, MAINE

Revisions:

Date: November 2nd, 2010
Scale: N/A
DOOR AND FINISH SCHEDULES

A4