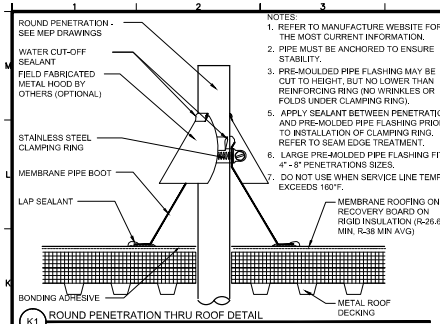

NOTES:
1. REFER TO MANUFACTURE WEBSITE FOR THE MOST CURRENT INFORMATION.
2. PIPE MUST BE ANCHORED TO ENSURE STABILITY.
3. PRE-MOULDED PIPE FLASHING MAY BE CUT TO HEIGHT, BUT NO LOWER THAN REINFORCING RING (NO WRINKLES OR FOLDS UNDER CLAMPING RING).
5. APPLY SEALANT BETWEEN PENETRATION AND PRE-MOLDED PIPE FLASHING PRIOR TO INSTALLATION OF CLAMPING RING. REFER TO SEAM EDGE TREATMENT.
6. LARGE PRE-MOLDED PIPE FLASHING FITS 4" - 8" PENETRATIONS SIZES.
7. DO NOT USE WHEN SERVICE LINE TEMP. EXCEEDS 160°F.

K1 ROUND PENETRATION THRU ROOF DETAIL
1 1/2" = 1'-0"

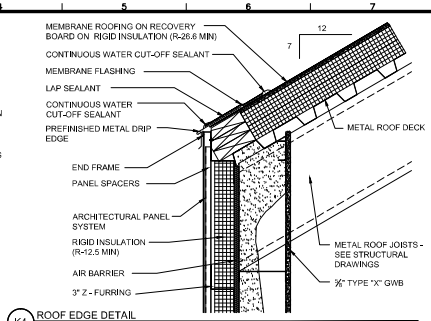

K4 ROOF EDGE DETAIL
1 1/2" = 1'-0"

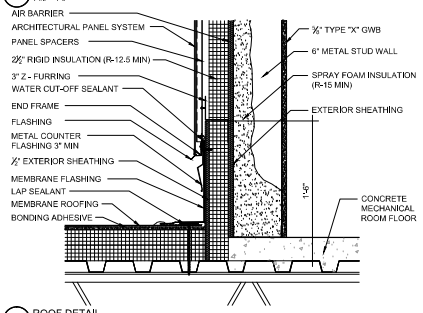

G4 ROOF DETAIL
1 1/2" = 1'-0"

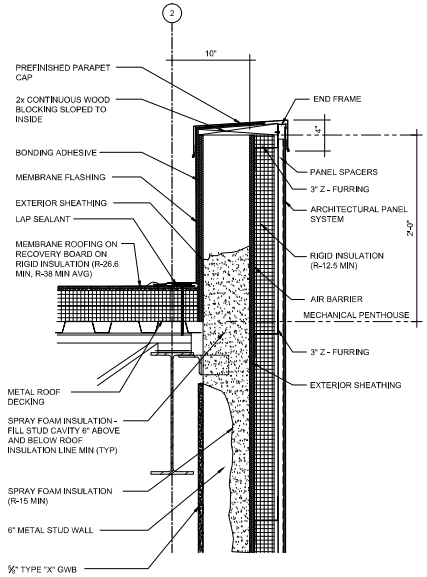

G8 TYPICAL ROOF PARAPET DETAIL @ METAL STUD WALL
1 1/2" = 1'-0"

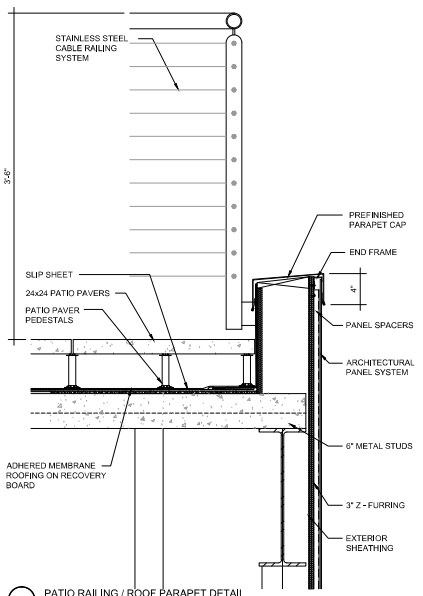

G11 PATIO RAILING / ROOF PARAPET DETAIL
1 1/2" = 1'-0"

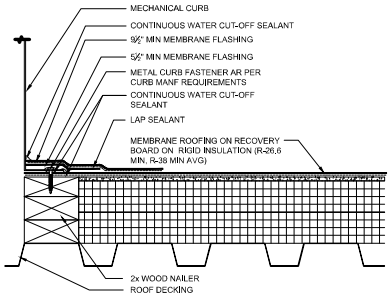

D1 MECHANICAL ROOF CURB DETAIL
3" = 1'-0"

SUMP AREA FIELD SEAM REQUIREMENTS.
A. IF FIELD SEAM EDGE IS WITHIN 9" OF DRAIN COMPRESSION RING, TARGET PATCH REQUIRED.
B. IF FIELDS SEAM EDGE IS WITHIN 9" TO 18" OF DRAIN COMPRESSION RING, HEAT WELD A LAYER OF MEMBRANE FLASHING (UNSUPPORTED) OR MEMBRANE CENTERED OVER SEAM EDGE. FLASHING MUST EXTEND 3" MIN. BEYOND EDGE OF SUMP.

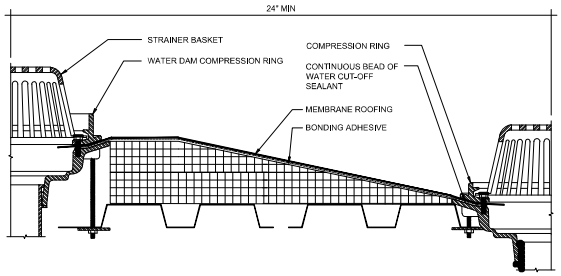

NOTES:
1. REFER TO MANUFACTURE'S WEBSITE FOR THE MOST CURRENT INFORMATION.
2. HOLE IN MEMBRANE SHOULD EXTEND A MINIMUM OF 1/2" BEYOND CLAMPING RING AND SHOULD NOT BE SMALLER THAN THE DIAMETER OF THE LEADER PIPE.
3. INSULATION ADJACENT TO DRAIN TO BE APPROPRIATE FIRESTONE INSULATION WITH APPROPRIATE BONDING SURFACE.
4. WATER CUT-OFF SEALANT MIN 1/2 OF 10 OZ. TUBE PER 4" DRAIN. USE ADDITIONAL WATER CUT-OFF SEALANT FOR LARGER DRAINS.

A1 ROOF DRAIN WITH OVERFLOW DETAIL
NTS

NO.	DATE	DESCRIPTION
0	03.31.15	SCHEMATIC DESIGN

ISSUED FOR CONSTRUCTION
07.22.15

TAC Architectural Group Inc.

LICENSED ARCHITECT Daniel C. Miller No. 3617 STATE OF MAINE
07.22.15

BSB - MARGINAL WAY

PORTLAND, MAINE

PROJECT NO:	14-007
CAD DWG FILE:	AE501 ROOF DETAILS.DWG
DRAWN BY:	CRJ
CHK'D BY:	DCM
COPYRIGHT:	2015

SHEET TITLE

ROOF DETAILS

AE501