

Ecostyle Towel Bar Radiators




- Simple, elegant curved or straight design
- Stove enameled finish for scratch and corrosion resistance
- Heating outputs ranging from 1,733 to 3,480 BTU/hr.
- Optional electric heating element



Ecostyle Towel Bar Radiators have long been used in Europe to heat bathrooms, kitchens, hallways, etc. without wasting valuable wall space. These radiators are designed to offer comfort and elegance to all types of interiors.

The Ecostyle Towel Bar Radiators come in straight or curved bar design with heating outputs ranging from 1,733 to 3,480 BTU/hr.

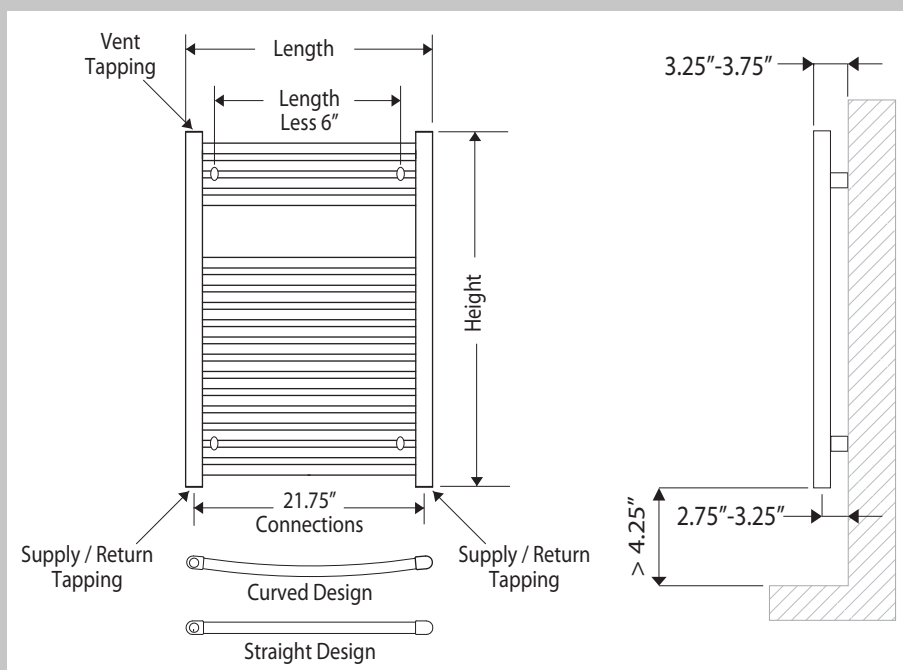

Ecostyle Towel Bar Specifications

| Model | Height (in) | Length (in) | Output (BTU) @ 180°F | Weight (lbs) | Water Content (gal) | Equivalent Baseboard @ 180°F (ft) |
|-----------|-------------|-------------|----------------------|--------------|---------------------|-----------------------------------|
| B-33.24CW | 33 | 24 | 1,733 | 17 | 1.20 | 3.0 |
| B-33.24SW | | | | | | |
| B-48.24CW | 48 | 24 | 2,525 | 25 | 1.90 | 4.4 |
| B-48.24SW | | | | | | |
| B-59.24CW | 59 | 24 | 3,037 | 31 | 2.21 | 5.3 |
| B-59.24SW | | | | | | |
| B-70.24CW | 70 | 24 | 3,480 | 44 | 2.87 | 6.1 |
| B-70.24SW | | | | | | |

Optional electrical heating element



| Towel Bar | Heating Element |
|-----------|-----------------|
| B-33.24 | RV-LT95510 |
| B-48.24 | RV-LT95512 |
| B-59.24 | RV-LT95514 |
| B-70.24 | RV-LT95515 |

Warmth without compromise.

Ecostyle Towel Bar Radiators provide the most comfortable for of heating. Their radiant heat acts like the sun, heating objects and people, not just air. This even warmth minimizes cold spots and drafts.

Style with individual room control.

Ecostyle Towel Bars can be equipped with non-electric control valves for individual room control.

Ecostyle Towel Bars are engineered for efficiency and are constructed of 1.25mm thick steel for resiliency.

They have have a smooth enamel finish which makes them extremely durable, scratch resistant and corrosion resistant.

Installation is fast and simple. The Ecostyle Towel Bars come direct from the factory as one unit with mounting hardware included.

The Ecostyle Towel Bar Radiators come with a 5-year warranty.