


LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1	Mark Unit:	Net Price:	
Qty: 1		Ext. Net Price:	USD




As Viewed From The Exterior

CN 2535
 FS 24" X 35 1/8"
 RO 25" X 35 5/8"

Stone White Exterior
 Bare Pine Interior
 Integrity Casement - Left Hand
 Wood-Ultrex
 CN 2535
 Rough Opening 25" X 35 5/8"
 IG
 Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Rectangular - Special Cut 3W3H
 Stone White Ext - Bare Int
 White Folding Handle
 Interior Aluminum Screen
 Charcoal Fiberglass Mesh
 Almond Frost Surround
 4 9/16" Jambes
 Nailing Fin

***Note: Divided lite cut alignment may not be accurately represented in the OMS d your local representative for exact specifications.

Line #2	Mark Unit:	Net Price:	
Qty: 1		Ext. Net Price:	USD

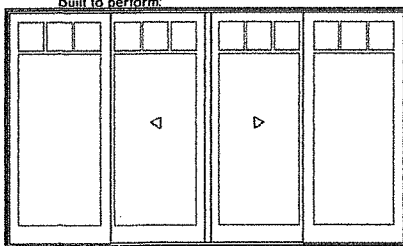


As Viewed From The Exterior

CN 12068
 FS 141" X 82"
 RO 142" X 82 1/2"

Stone White Exterior
 Bare Pine Interior
 Integrity Sliding French Door - OXXO Left Hand
 Wood-Ultrex
 CN 12068
 Rough Opening 142" X 82 1/2"
 **Operator Panels Ship Separate
 Left Panel
 IG
 Tempered Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Cottage 3W1H
 4 Rect Lites
 10" DLO Height
 Stone White Ext - Bare Int
 Left Center Panel
 IG
 Tempered Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Cottage 3W1H
 4 Rect Lites
 10" DLO Height
 Stone White Ext - Bare Int
 Right Center Panel
 IG
 Tempered Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Cottage 3W1H
 4 Rect Lites
 10" DLO Height
 Stone White Ext - Bare Int
 Right Panel
 IG

Tempered Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Cottage 3W1H
 4 Rect Lites
 10" DLO Height
 Stone White Ext - Bare Int
 Multi-Point Lock
 Cambridge SFD Handle Satin Nickel PVD Keyed Exterior Primary Handle Set
 Cambridge SFD Handle White Interior Primary Handle Set
 Cambridge SFD Handle Satin Nickel PVD Exterior Secondary Handle Set
 Cambridge SFD Handle White Interior Secondary Handle Set
 Keyed Alike
 Keyed Alike Group 1
 Exterior Aluminum Screen
 Stone White Surround
 Charcoal Fiberglass Mesh
 ***Screen/Combo Ship Loose
 4 9/16" Jamb
 Nailing Fin
 ***Note: Divided lite cut alignment may not be accurately represented in the OMS d
 your local representative for exact specifications.

Line #3	Mark Unit:	Net Price:	
Qty: 5		Ext. Net Price:	USD

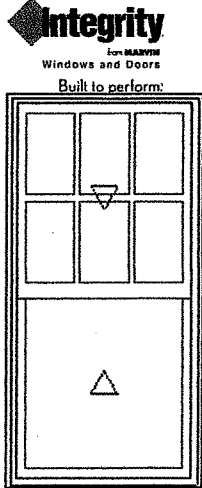

Stone White Exterior
 Bare Pine Interior
 Integrity Traditional Double Hung
 Wood-Ultrex
 CN 3060
 Rough Opening 30 1/2" X 60 1/4"
 Top Sash
 IG
 Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Rectangular - Standard Cut 3W2H
 Stone White Ext - Bare Int
 Bottom Sash
 IG - 1 Lite
 Low E2 w/Argon
 White Sash Lock
 Exterior Aluminum Screen
 Stone White Surround
 Charcoal Fiberglass Mesh
 4 9/16" Jamb
 Nailing Fin

As Viewed From The Exterior
CN 3060
FS 29 1/2" X 59 3/4"
RO 30 1/2" X 60 1/4"

Line #4	Mark Unit:	Net Price:	
Qty: 1		Ext. Net Price:	USD




Stone White Exterior
 Bare Pine Interior
 Integrity Inswing French Door - X Right Hand
 Wood-Ultrex
 CN 3068
 Rough Opening 37 5/16" X 82 1/2"
 IG
 Tempered Low E2 w/Argon
 7/8" SDL - With Spacer Bar
 Cottage 3W1H
 4 Rect Lites
 10" DLO Height
 Stone White Ext - Bare Int
 Multi-Point Lock
 Cambridge Swinging Door Handle Satin Nickel PVD Keyed Exterior Primary Handle
 Cambridge Swinging Door Handle White Interior Primary Handle Set
 White Adjustable Hinges

OMS Ver. 0002.05.00 (Current)
Product availability and pricing subject to change.

STERMER
STERMER

Quote Number: **UJND2U5**
Architectural Profile Number:



Primary

As Viewed
From The
Exterior

CN 3068
FS 36 5/16" X 82"
RO 37 5/16" X 82 1/2"

No Screen
4 9/16" Jamb
Nailing Fin
***Note: Divided lite cut alignment may not be accurately represented in the OMS drawing. Please consult your local representative for exact specifications.