

**DEMOLITION LEGEND:**

- INDICATES CEILING TILE AND GRID DEMO. UNLESS OTHERWISE NOTED OR SHOWN ON PLANS AS "EXISTING TO REMAIN".
- INDICATES 2X2 LENSED LIGHT FIXTURE TO BE REMOVED
- INDICATES 2X2 SURFACE MOUNTED LENSED LIGHT FIXTURE TO BE REMOVED
- INDICATES 2X4 LENSED LIGHT FIXTURE TO BE REMOVED
- INDICATES SURFACE MOUNTED LIGHT FIXTURE TO BE REMOVED
- INDICATES EXISTING CEILING TO REMAIN
- INDICATES EXISTING LIGHT FIXTURE TO REMAIN
- INDICATES EXISTING SOFFIT TO REMAIN

**SALVAGE:**


1. SALVAGE ALL DOME CEILING MIRRORS - REINSTALL UPON COMPLETION
2. ALL EXIST SIGNS TO REMAIN
3. ALL CEILING MOUNTED DEVICES TO REMAIN
4. SPRINKLER HEADS TO REMAIN
5. CEILING SIGNAGE / DIRECTORIES TO BE REMOVED AND SALVAGED FOR POSSIBLE REUSE

**DEMOLITION NOTES:**

1. CONTRACTOR TO FAMILIARIZE HIMSELF WITH ALL EXISTING ELEMENTS OF CONSTRUCTION PRIOR TO COMMENCING DEMOLITION. ALL WORK SHALL COMPLY WITH APPLICABLE REQUIREMENTS OF THE BUILDING CODE, AND HEALTH REGULATIONS AND BE PERFORMED IN SUCH A MANNER AS TO ENSURE HUMAN SAFETY.
2. CONTRACTOR TO COORDINATE THE REMOVAL AND RELOCATION OF SPECIFIED ELECTRICAL AND/OR MECHANICAL SYSTEMS AND DEVICES AS REQUIRED BY WALL DEMOLITION AND NEW LAYOUT. BRING ALL SYSTEMS BACK TO CORE - PANELS, SHAFTS, ETC.
3. WHEN DEMOLITION OF ANY EXISTING ITEM IS IN QUESTION, NOTIFY ARCHITECT AND BUILDING MANAGER PRIOR TO DEMOLITION IN THE AREA. GC TO COORDINATE WITH BUILDING MANAGER ON SHUTDOWN TIME WHEN WORKING ON EXISTING SYSTEMS.
4. WHERE WALLS ARE REMOVED WHICH ABUT EXISTING COLUMNS, PERIMETER OR CORE WALLS TO REMAIN THE GENERAL CONTRACTOR SHALL PATCH AND SAND SMOOTH/SKIM COAT AND HAVE WALL READY TO RECEIVE NEW FINISH. ALSO PATCH AND PAINT EXISTING CONVECTOR & GRILLES.
5. EXPLOSIVES: ARE NOT NECESSARY NOR PERMITTED.
6. TRAFFIC: CONDUCT OPERATIONS AND REMOVAL OF DEBRIS TO ENSURE MINIMUM INTERFERENCE WITH THE NORMAL USE OF PUBLIC WAYS AND OTHER ADJACENT FLOORS. DO NOT CLOSE OR OBSTRUCT TRAFFIC WAYS, STREETS, WALKS OR OTHER USED FACILITIES WITHOUT THE WRITTEN PERMISSION OF THE OWNER AND AUTHORITIES HAVING JURISDICTION.
7. AS WHERE REQUIRED AGENCIES HAVE JURISDICTION, CERTAIN NOISE-PRODUCING WORK MAY HAVE TO BE PERFORMED DURING SPECIFIED HOURS ONLY. THE GENERAL CONTRACTOR AND TRADE CONTRACTORS MAY BE REQUIRED AT TIMES TO PERFORM WORK TASKS AFTER REGULAR BUSINESS HOURS IF NOISE CANNOT BE ATTENUATED TO THE SATISFACTION OF THE OWNER. PRIOR TO THE START OF SELECTIVE DEMOLITION, THE GENERAL CONTRACTOR SHALL SUBMIT TO THE OWNER A NOISE CONTROL PROGRAM FOR REVIEW.
8. THE GENERAL CONTRACTOR SHALL RECOGNIZE THAT THE BUILDING WILL REMAIN OCCUPIED THROUGHOUT DEMOLITION AND SHALL USE EVERY EFFORT AND MEANS POSSIBLE TO MINIMIZE NOISE CAUSED BY HIS DEMOLITION OPERATIONS.
9. FIRE WATCH: PROVIDE A FIRE WATCH DURING ANY TORCH CUTTING PROCEDURES REQUIRED FOR DEMOLITION PURPOSES.
10. NOISE CONTROL: TAKE SPECIAL CARE TO CONTROL NOISE TO AVOID CREATING A NUISANCE.
11. CONTRACTOR IS TO DEVELOP AND IMPLEMENT AN IAQ (INDOOR AIR QUALITY).
12. FOLLOW STRICT ADHERENCE TO PATHWAY INTERRUPTION AND DUST CONTROL MEASURES OUTLINED IN APPROVED IAQ PLAN.



DESIGNER:  
**BOULOS COMMERCIAL DESIGN, PLLC**  
 1 CANAL PLAZA SUITE 500  
 PORTLAND ME 04101  
 www.bouloscommercialdesign.com  
 207-749-1795

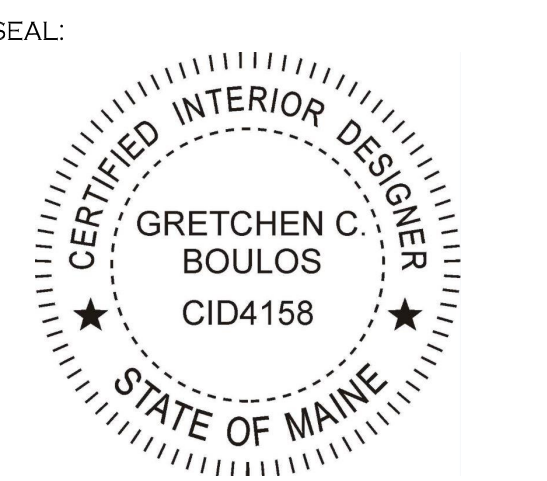

OWNER:  
**HEALTHSOUTH**  
 NEW ENGLAND REHABILITATION HOSPITAL OF PORTLAND  
 335 Brighton Avenue,  
 Portland, ME 04102

LANDLORD:  
**Maine Medical Center**

335 Brighton Avenue,  
 Portland, ME 04102

GENERAL CONTRACTOR  
**HEBERT CONSTRUCTION**  
 9 Gould Road  
 Lewiston, ME 04240

REVISIONS:  
 DELTA: DATE: 07-06-2017

TITLE:  
**DEMOLITION CEILING PLAN**

SCALE: 1/8" = 1'-0"  
 DATE: '01-19-2017

FLOOR 2

**D2.2**