1ST FLOOR FITTER'S NOTES:

-NEW AND RELOCATED HEADS WITHIN CORRIDORS SHALL BE IN LINE WITH EXISTING HEADS AND CENTERED WITHIN THE TILE IN THE OTHER DIRECTION.
-ALL NEW HEADS SHALL BE WHITE 2 PIECE SEMI RECESSED.
-EXISTING HEADS TO BE REMOVED AND REPLACED WITH WHITE 2 PIECE SEMI RECESSED. DESIGNATED WITH: △1
-REMOVE EXISTING FIRE HOSE VALVES.
-NEW HEADS TO BE ADDED IN SMALL HALLWAY CLOSETS.

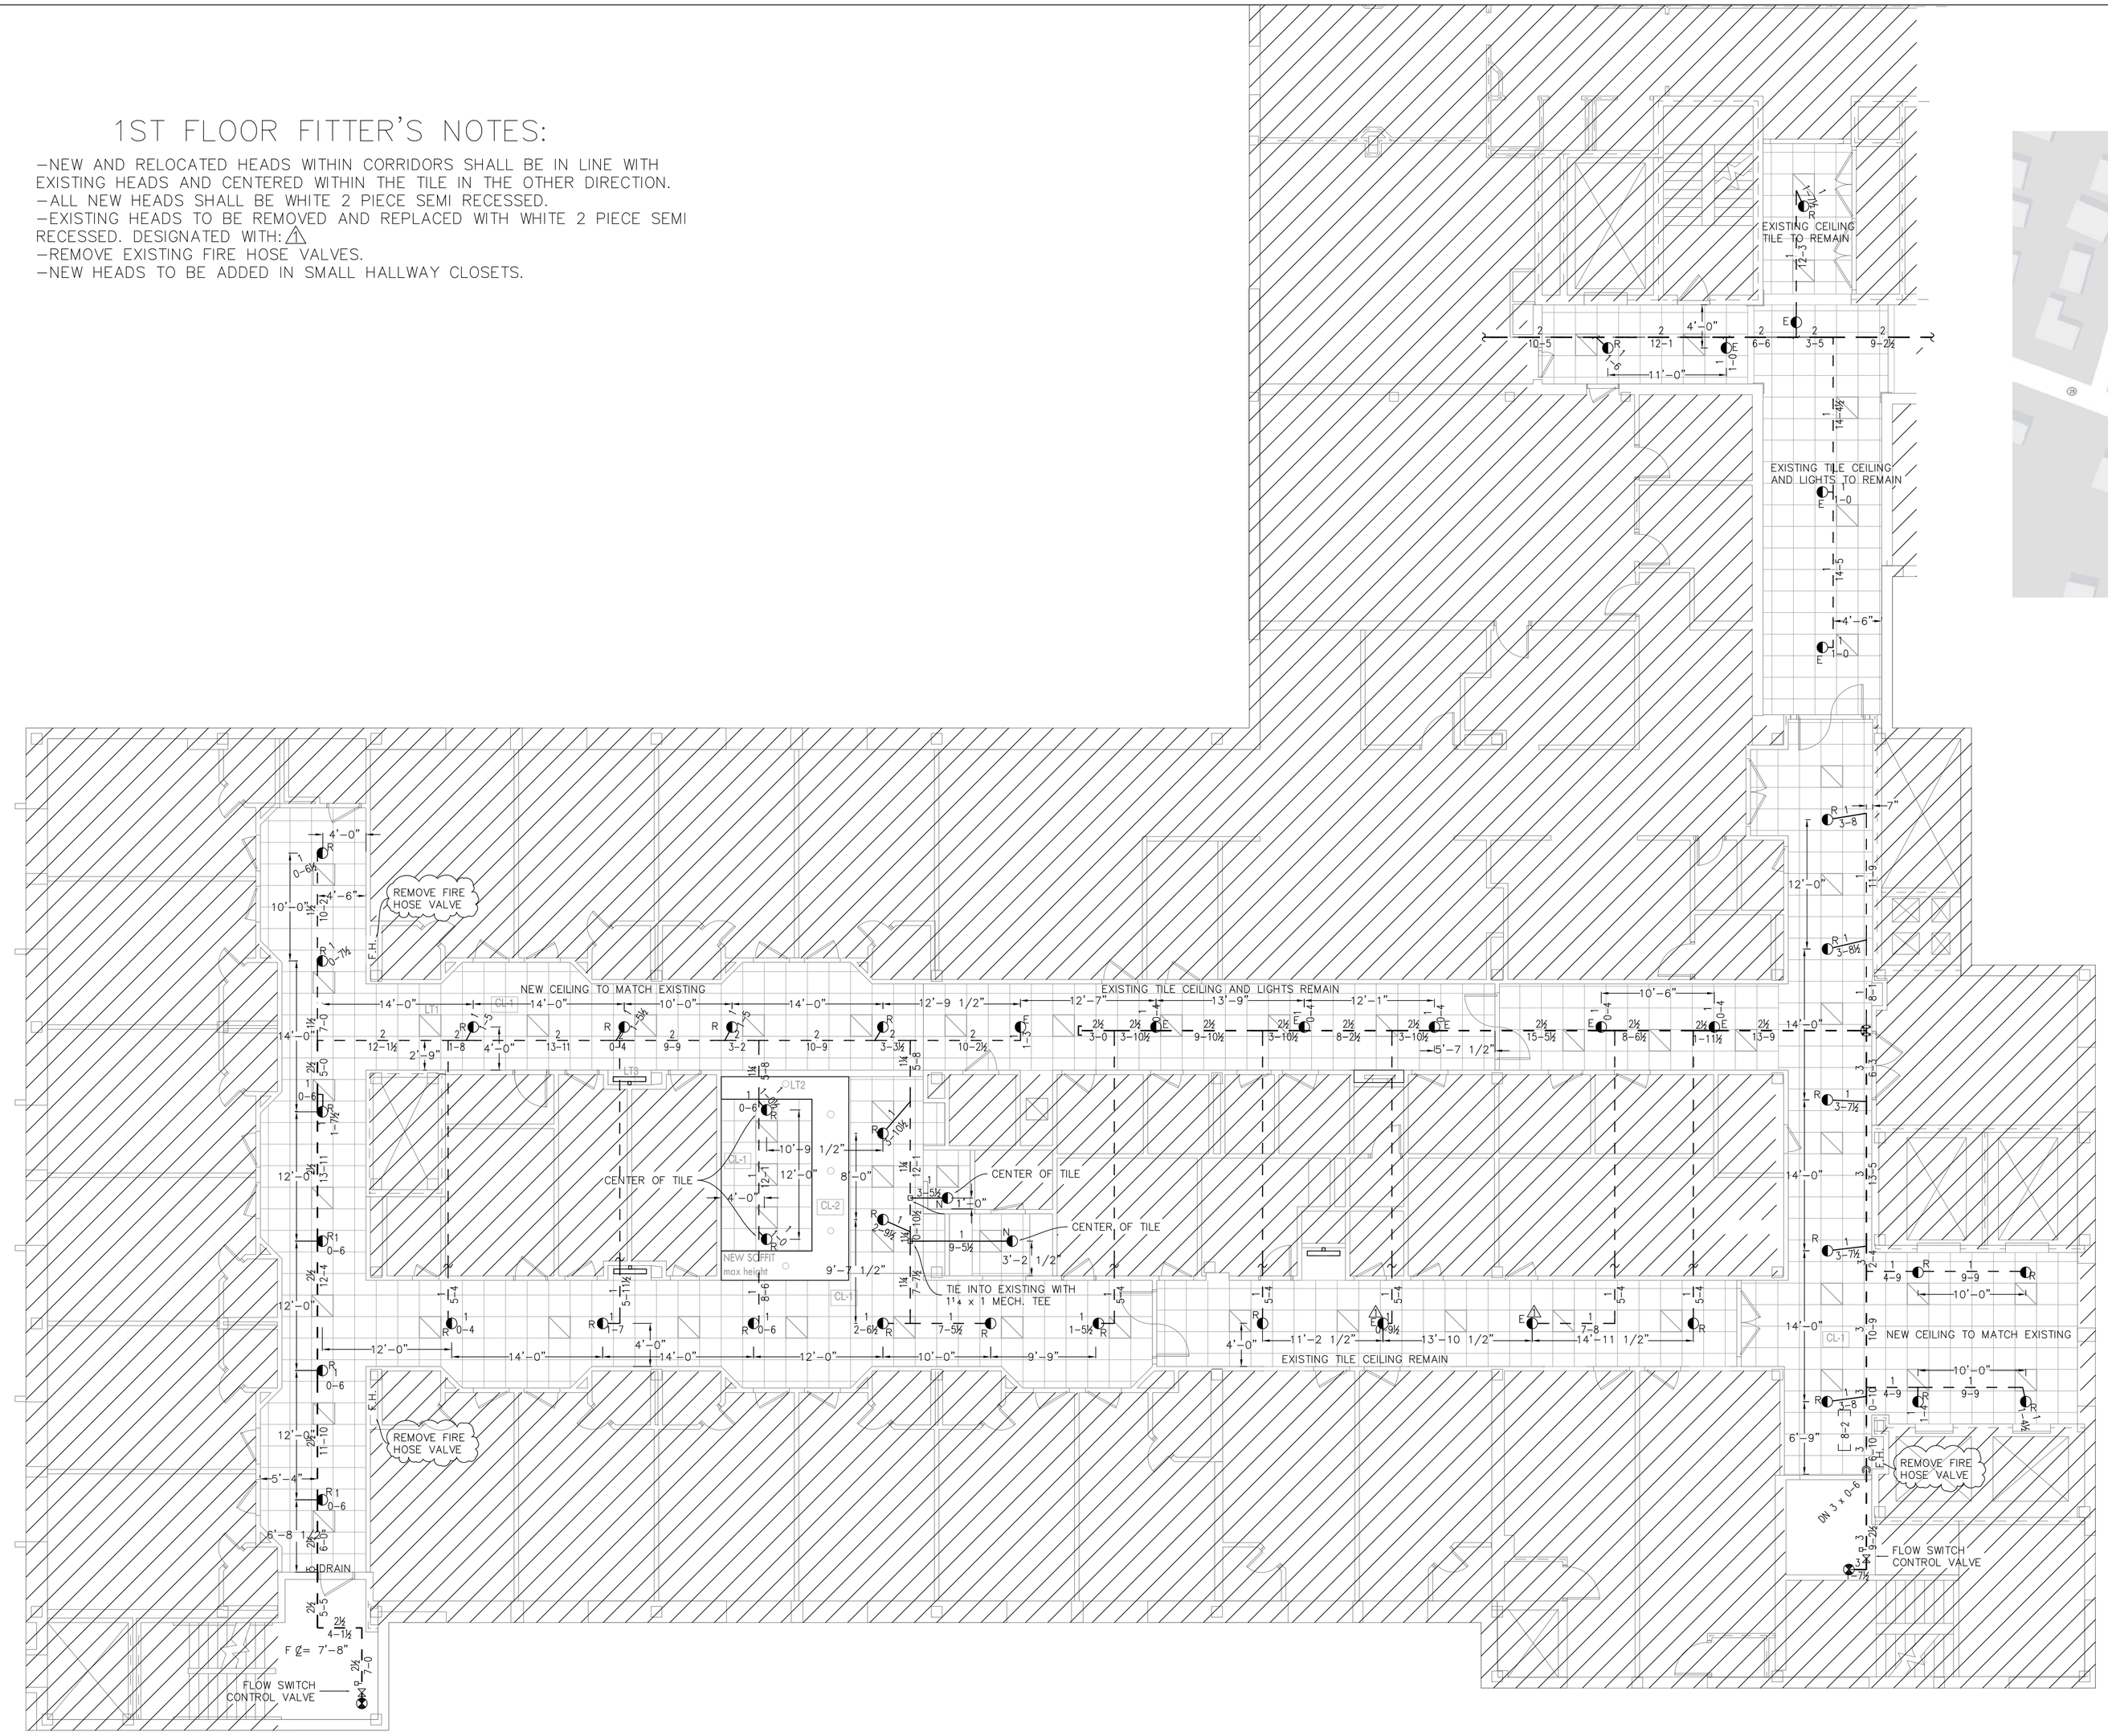

SITE MAP:

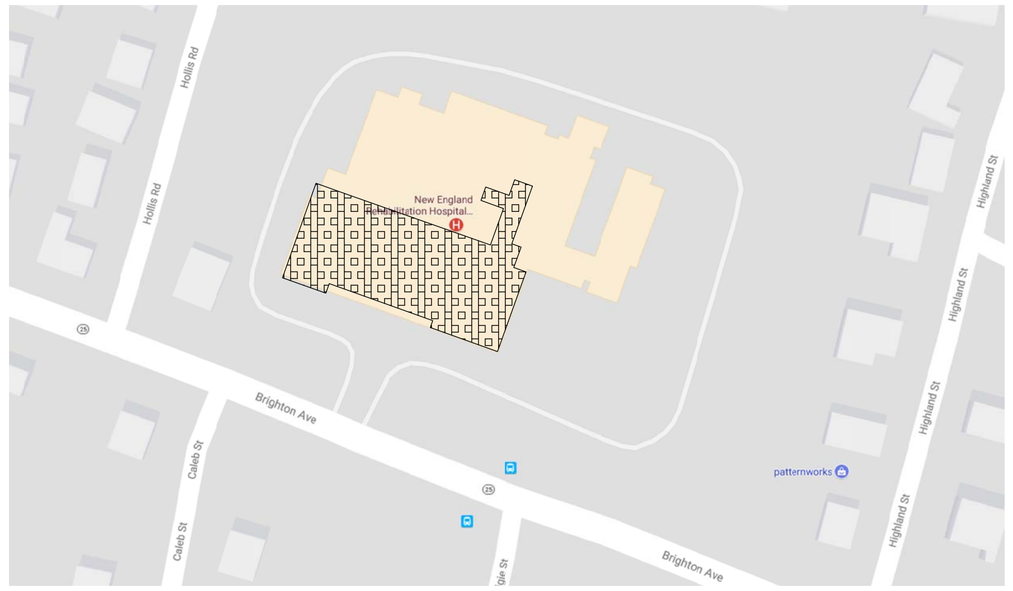

LEGEND:

E	EXISTING HEAD TO REMAIN
R	RELOCATED HEAD
N	NEW HEAD
	SEMI-RECESSED HEAD WHITE
	SEMI-RECESSED HEAD CHROME
	RISE OR DROP
	GROOVED RIGID COUPLING
X'-X"	CEILING HEIGHT
	HANGER
	HATCHED AREA NOT IN SCOPE. EXISTING COVERAGE TO REMAIN.
F ℄= X'-X"	FINISHED FLOOR TO PIPE CENTERLINE
C ℄= X'-X"	CEILING TO PIPE CENTERLINE
D ℄= X'-X"	CONCRETE DECK TO PIPE CENTERLINE
CTE	CONNECT TO EXISTING

GENERAL NOTES:

ALL 1" THREADED PIPE IS TO BE DOMESTIC SCH. 40 BLACK STEEL.
ALL THREADED PIPE FITTINGS ARE TO BE DOMESTIC BLACK CAST IRON, CLASS 125.
PIPE LENGTHS SHOWN ON THREADED PIPE ARE CENTER TO CENTER UNLESS NOTED.

SYSTEM CLASSIFICATION:

THE WET PIPE SYSTEM OF AUTOMATIC SPRINKLERS IS DESIGNED IN ACCORDANCE WITH NFPA-13, STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS, 2016 EDITION.
LIGHT HAZARD OCCUPANCY.

SCOPE OF WORK:

ONE FOR ONE HEAD RELOCATION OF THE EXISTING WET PIPE SYSTEM OF AUTOMATIC SPRINKLERS IN THE 1ST AND 2ND FLOORS PER NEW CEILING AND CONSTRUCTION PLAN. SYSTEM IS DESIGNED IN ACCORDANCE WITH NFPA-13, STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEMS, 2016 EDITION.
22 EXISTING HEADS TO REMAIN
56 HEADS TO BE RELOCATED
10 NEW HEADS TO BE INSTALLED

DEAN & ALLYN, INC.
FIRE PROTECTION · SPECIAL HAZARD
116 LEWISTON ROAD, GRAY, MAINE 04039
207/657-5646 FAX 207/657-5647

FIRE PROTECTION SUBCONTRACTOR: DEAN & ALLYN, INC.
STATE OF MAINE CONTRACTOR'S LICENSE NUMBER FSC262
EXPIRATION DATE: JUNE 30, 2019

HEAD LEGEND:

47 / 155°	RELIABLE MODEL F1FR56 RECESSED PENDENT QUICK RESPONSE, STANDARD COVERAGE WHITE, K=5.6, 1/2" NPT, SIN RA1414

SCALE 3/32"=1'-0" | SCALE 1/8"=1'-0" | SCALE 3/16"=1'-0" | SCALE 1/4"=1'-0" | SCALE 3/8"=1'-0"

REVISIONS	DATE	APPROVED BY	DATE
0 SUBMIT FOR APPROVAL	/ /		/ /

DANA A. STEWART
NICET IV – #064544

SURVEYED BY	ZJG	9/20/17
DRAWN BY	ZJG	9/26/17
CHECKED BY	–	
AT DEAN & ALLYN, INC		
SCALE 1/8"=1'-0" U/N		
SHEET NO. 1 OF 2		

DRAWING TITLE: 1ST FLOOR FIRE PROTECTION SYSTEM

JOB: BMC NEW ENGLAND REHAB
335 BRIGHTON AVENUE
PORTLAND, ME 04102

CONTRACT WITH: HEBERT CONSTRUCTION
9 GOULD ROAD LEWISTON, ME 04240

REV. 0

NO. OF SPRINKLERS SHOWN ON THIS SHEET: 47

NO. OF SPRINKLERS ON JOB: 100

CONTRACT NO. C171456