

MARVIN DESIGN GALLERY

a complete window and door showroom
by Eldredge

Marvin Design Gallery
317 Marginal Way
Portland, ME 04101
USA

(207) 772-2003 Fax: (207) 772-0418
Sales Person: John Collins
jcollins@marvinportland.com
www.marvinbyeldredge.com

December 5, 2017

CA Monsell & Company
23 Glenwood Ave
Portland, ME 04103
Home: (207) 518-1004
Email: c.a.monsellandco@gmail.com

Project: Asen
4 Options


PROPOSAL

Proposal

The Marvin Design Gallery proposes to supply the product listed below. Please review to ensure all sizing and specifications are correct and meet your projects requirements.

Marvin products are special order and may not be changed or returned once the order is approved and processed.

Item#: 1 Location: ICA 3 Wide Option #1 Qty: 1 Total: \$1,732.50

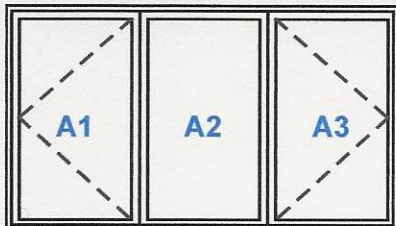

Manufacturer: Marvin; assembly type: rectangle assembly – 3 wide x 1 high; rough opening: 97" x 54 1/2" (assembly); 4 9/16" jamb depth; white interior; stone white exterior; nailing fin w/ certification brackets.

Window A1

Integrity casement – left hand; call number: 33 x basic frame: 54"; rough opening: 33" x 54 1/2"; insulated glass – 1 lite; low E2 with argon; white folding handle; wood interior – ultrex exterior; screen: interior aluminum screen: screen wire: charcoal fiberglass mesh, screen: white frame.

Window A2

Integrity casement – stationary; call number: 33 x basic frame: 54"; rough opening: 33" x 54 1/2"; insulated glass – 1 lite; low E2 with argon; wood interior – ultrex exterior.

Window A3

Integrity casement – right hand; call number: 33 x basic frame: 54"; rough opening: 33" x 54 1/2"; insulated glass – 1 lite; low E2 with argon; white folding handle; wood interior – ultrex exterior; screen: interior aluminum screen: screen wire: charcoal fiberglass mesh, screen: white frame.

***Note: This configuration is certified to AAMA 450.

1/4" = 1' 0" - All drawings are exterior views.