

Type Face-Lit illuminated channel letters

Fab. 5" Deep std .040 coil - white interior, .063 pre-finished white aluminum backs

Mounting Mounted to common extruded 4-1/2" x 4-1/2" raceway, entire sign mounted to building facade with spacers to lift over brick column

Illumination LEDS - Sylvania 71071 White 6500K

Letter Faces 3/16" #7328 White acrylic faces with 1" std trimcap

Logo Face 3/16" #7328 White acrylic with 3M 3630-106 Brilliant Green


Painting Letter returns - PMS Gray 430C / Trim - Std Black
Logo returns - PMS 376C / Trim - PMS 376C
Raceway - TBD

Colors to Match

Letter Returns
PMS 430C Gray

Trim & Returns - PMS 376C
Faces - #7328 translucent white
with 3M 3630-106 Brilliant Green

Existing Blade Sign
Move from previous location

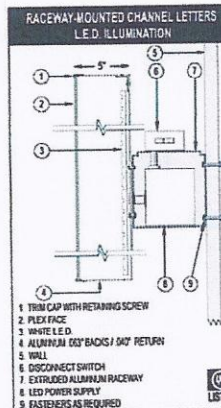

SOUTH WATER
SIGNS

Sales Rep:
tm
Designer:
rm

HR BLOCK #19055

Client Approval
Drawing: 7001767-19055
Date: 6/25/13
Landlord Approval

Job#: 7001767
Drawing: 7001767-19055
Start Date: 06.03.13
Last Revision: 00.00.00
Page: 1 of 2

Location:
621 Forest Ave
Portland, ME

MEMBER
INTERNATIONAL SIGNAGE
UL
LISTED



H&R Block is moving to this space - must survey both locations

14 1/2"
6'9"
4 1/2"
7'2 1/2"



35 1/2"
58 1/2"

47 1/2"
58 1/2"

Door size
30 1/4" x 75 1/2"

