



28 Vannah Avenue
 Portland, Maine 04103
 (207) 781-5242
 FAX (207) 781-4245


JOB DUTKIN - 5 RIVER PARK D3

SHEET NO. 1 OF 1


CALCULATED BY JAMIE DATE 3/13/2013

CHECKED BY _____ DATE _____

SCALE _____

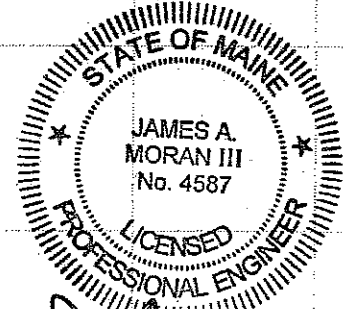

J. A. Moran III
 3/13/2013

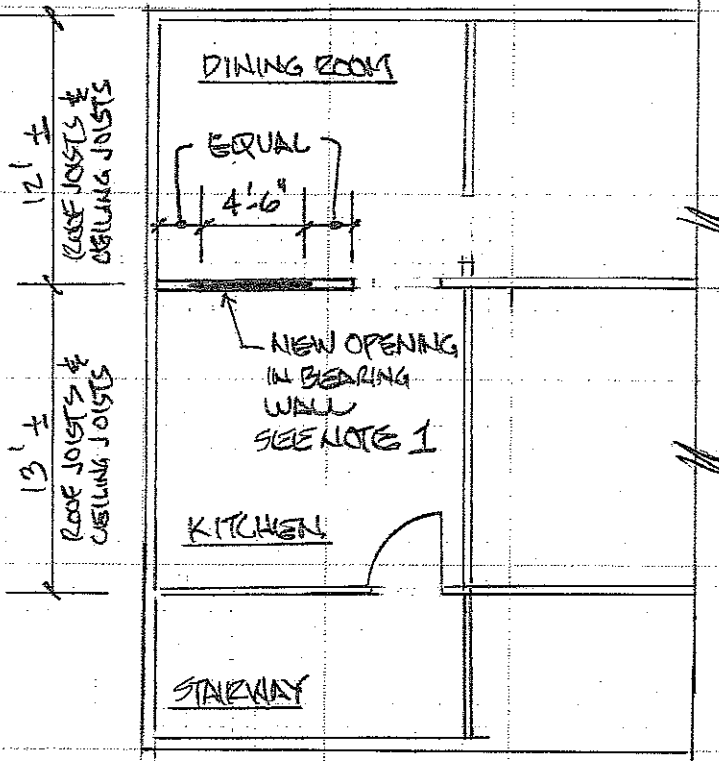

PLAN VIEW

NOTE 1: PROVIDE 2 - 2x8 HEADER (SHIM W/ PLYWOOD TO MATCH WALL THICKNESS). BEAR HEADER EACH END ON 1 - JACK STUD AND 1 - KING STUD DOWN TO FLOOR PLATE.
 RELOCATE EXISTING PLUMBING AS REQUIRED.
 TEMPORARILY SHORE EXISTING CEILING JOISTS PRIOR TO WALL REMOVAL AND REMOVE AFTER NEW HEADER/S INSTALLED.

2. DESIGN LOADS : SNOW LOAD = 42 PSF
 ROOF DEAD LOAD = 8 PSF
 CEILING DEAD LOAD = 10 PSF