


# SUPPLEMENT:

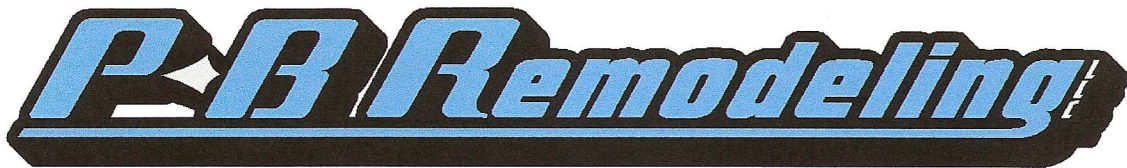

**White Rock, ME**

**776-8344**

**Job Name/Location:**

**05/16/16**

Paula Silsby  
75 Chenery Street  
Portland, ME 04103  
Tel: 653-2611

**Garage/Mudroom Supplemental Information:**

**Window/Door Schedule:**

- |                              |   |
|------------------------------|---|
| 1. Mudroom Window:           | 2'x3' Andersen A Series Casement                            |
| 2. Mudroom Exterior Entry:   | 2'8"x6'8" Thermatru RH Inswing                              |
| 3. Garage Exterior Man Door: | 2'8"x6'8" Thermatru LH Inswing                              |
| 4. Overhead Door:            | 8'x7' Raised Panel w/ 1 row glass                           |
| 5. Garage/Mudroom Door:      | 2'6"x6'8" Fire rated LH Inswing<br>with self closing hinges |

**Foundation:**

- 8"x18" poured footing with 2 runs #4 Rebar
- 8"x 4' frost wall with vertical #4 rebar every 4' and 2 runs of horizontal #4 rebar
- ½" Anchor bolts every 4'
- Plastic vapor barrier below 4" garage concrete slab
- Vapor barrier and 2" Styrofoam below 4" mudroom slab

**Framing:**

- 2x6 KD wall studs 16" OC
- 2x6 PT wall plates
- 2x6 KD double top plates
- Double 2x8 window/door headers
- ½" CDX wall sheathing with Typar house wrap

- 2x8 KD rafters 16" OC
- 2x10 ridge beam
- 2x8 collar ties 16" OC
- 5/8" Advantech Zip sheathing
- 1x3 strapping 16" OC
- 2x4 interior partitions 16" OC

### **Roofing/Siding:**

- Grace Ice and Water shield over entire roof
- Gray IKO architectural shingles over entire roof
- Cobra Ridge vent at peak
- 4/4 Vinyl siding on all

### **Insulation:**

- Mudroom Walls: 5.5" dense pack cellulose
- Mudroom Ceiling: R-38 fiberglass + 1" foil faced fiberglass
- Garage Walls: R-21 craft faced fiberglass
- Garage Ceiling: R-38 craft faced fiberglass

### **Drywall:**

- 1/2" on all mudroom exterior walls and ceiling
- 5/8" on garage/mudroom dividing wall
- 5/8" on all garage walls and ceiling

### **Interior Finish:**

- Trim: colonial casing
- Floor: Tile
- Garage Floor: painted concrete