City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone:

60 Hersey St	Blake, V	Villiam			980058
Owner Address:	Lessee/Buyer's Name:	Phone:	Phone: BusinessName:		
P.O. Box 1022 Scarborough		883-5645			PERMIT ISSUED
Contractor Name: SAA	Address:	Phone:			Permit Issued:
Past Use:	Proposed Use:	COST OF WORK		PERMIT FEE:	FEB - 3 1998
1 431 030.	Troposed esc.	\$ 1,000.00		\$ 25.00	
1-fam	Same		FIRE DEPT. □ Approved		CITY OF PORTLAND
			FIRE DEPT. □ Approved □ Denied		
				Use Group: Type:	Zone: 7 CBL: 129-G-025
Proposed Project Description:	roject Description: Signature: Signature: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D			Zoning Approval: 5 7 11-	
T BBB TRIMING I				S DISTRICT (P.A.D.)	1 2 W Y and war
	Action: Approved Approved with Conditions:			ppecial Zollejol Keviews.	
Make Interior Renovations	as ner nlans		enied		
	25 per prans				□ Flood Zone
	· · · · · · · · · · · · · · · · · · ·	Signature:		Date:	□ Subdivision
Permit Taken By: Mary Gresik	Date Applied For:	20 January 100	0		☐ Site Plan maj ☐minor ☐mm ☐
		28 January 1998			Zoning Appeal
1. This permit application does not preclude the A	□ Variance				
2. Building permits do not include plumbing, se		☐ Miscellaneous ☐ Conditional Use			
3. Building permits are void if work is not started	☐ Interpretation				
tion may invalidate a building permit and stop					□Approved
,		PERMIT WITH REQU	ISSUE	•	☐ Denied
		WITH REQL	JIREMEN	1783	Historic Preservation
		•	LINEW	(AS	19 Not in District or Landmark
	☑Does Not Require Review				
					☐ Requires Review
					Action:
	CERTIFICATION	N.			
I hereby certify that I am the owner of record of the			owner of i	record and that I have been	☐ Approved ☐ Approved with Conditions
authorized by the owner to make this application a					
if a permit for work described in the application is					1/10/00
areas covered by such permit at any reasonable ho	ur to enforce the provisions of the	e code(s) applicable to such p	permit	•	Date: 1/28/79
2.1011					/ /
//UV 56/hg		2	8 Janua	ry 1998	TNA
SIGNATURE OF APPLICANT William Blai	ae ADDRESS:	DATE:	- Janua	PHONE:	- <u>'V'</u>
					<u> </u>
RESPONSIBLE PERSON IN CHARGE OF WORK	K, TITLE			PHONE:	CEO DISTRICT
					OFO DISTRICT 14

COMMENTS

	/	711,771,172,77		
2-4-9F	Francy La	illa TV		
2.26.98	France (1, con	16-1		
	and a	que		
<u> </u>				
				1-11
			Increasion Description	
		Туре	Inspection Record	Date
		Foundation:	, ,	
1		Framing:Ok	7	2-21
		Plumbing:		
		Final:		-
		Other:		

BUILDING PERMIT REPORT

DATE: 30 Jan 98 ADDRESS: 60 Hersey ST. 129-6-25
REASON FOR PERMIT: 19 Terior rozora Tions
BUILDING OWNER: WILliam Blake
CONTRACTOR: SAA
PERMIT APPLICANT: SAA APPROVAL! 18849 10 × 12 × 46 DENIED
USE GROUP R-3 BOCA 1996 CONSTRUCTION TYPE 5B
CONDITION(S) OF APPROYAL

- X 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 - 3. Precaution must be taken to protect concrete from freezing.
 - 4. It is strongly recommended that a registered land/surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 - Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from 5. adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 - All chimneys and years shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
 - 7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
- Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, 11-4, 1-1, 1-2 M and R and public garages and open parking structures, open goards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)
- Hendroom in habitable space is a minimum of 7'6".
- Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread, 7" maximum rise,
 - The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8") 11.
- ∠ 12. Every sleeping room below the fourth story in buildings of use Groups R and 1-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or resear they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 - Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable 13. when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 - All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with 14. self closer's.
 - The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and eciling, or by 15. providing automatic extinguishment.
 - All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms

In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and 1-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. The Fire Alarm System shall be maintained to NFPA #72 Standard. The Sprinkler System shall maintained to NFPA #13 Standard. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023, & 1024, Of the City's building code, (The BOCA National Building Code/1996) No construction or demolition work shall begin until you have obtained permits for dumpsters or containers. A work Stop Order shall be issued if this requirement is not met. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year". The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office. Ventilation shall meet the requirements of Chapter 12 Sections 1210, of the City's Building Code. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. All requirements must be met before a final Certificate of Occupancy is issued, All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996). Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). In planout

P. Simmer Doffses, Code Enforcement

cc: Lt. McDongall, PFD Marge Schmickal

7.

8.

19.

20.

21.

22.

2.7.

24.

25.

26. 27.

28.

30.

31.


32.

33.


34.

LAND USE - ZONING REPORT


ADDRESS: 60 Hersey & DATE: 1/28/98
REASON FOR PERMIT: Interior Venovotes
BUILDING OWNER: WILLIAM BLAKE C-B-L; 129-G-25
PERMIT APPLICANT: Ouner
APPROVED: With Conditions DENIED:
#5.#9
CONDITION(S) OF APPROVAL
1. During its existence, all aspects of the Home Occupation criteria, Section 14-410, shall be
maintained. The footprint of the existing shall not be increased during maintenance
7 reconstruction. 3. All the conditions placed on the original, previously approved, permit issued on are still in effect for this amendment.
 Your present structure is legally nonconforming as to rour and side setbacks. If you were to demolish the building on your own volition, you will not be able to maintain these same setbacks. Instead you would need to meet the zoning setbacks set forth in today's prdinances. In order to preserve these legally non-conforming setbacks, you may only rebuild the garage in place and in phases. This property shall remain a single family dwelling. Any change of use shall require a separate permit application for review and approval. Our records indicate that this property has a legal use of units. Any change in this approved use shall require a separate permit application for review and approval. Separate permits shall be required for any signage. Other requirements of condition
reacy can so kell then Egypthent Ming be Acraced?
Marge Schmuckal, Zoning Administrator,
Asst. Chief of Code Enforcement

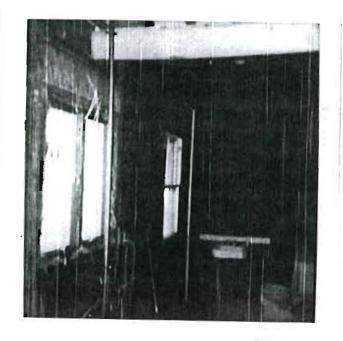

With

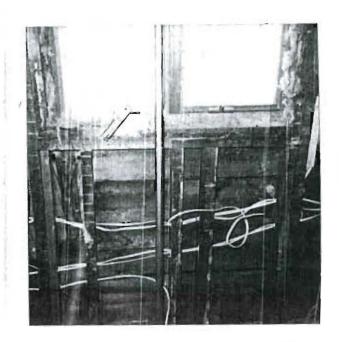



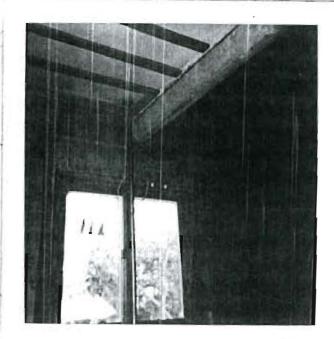












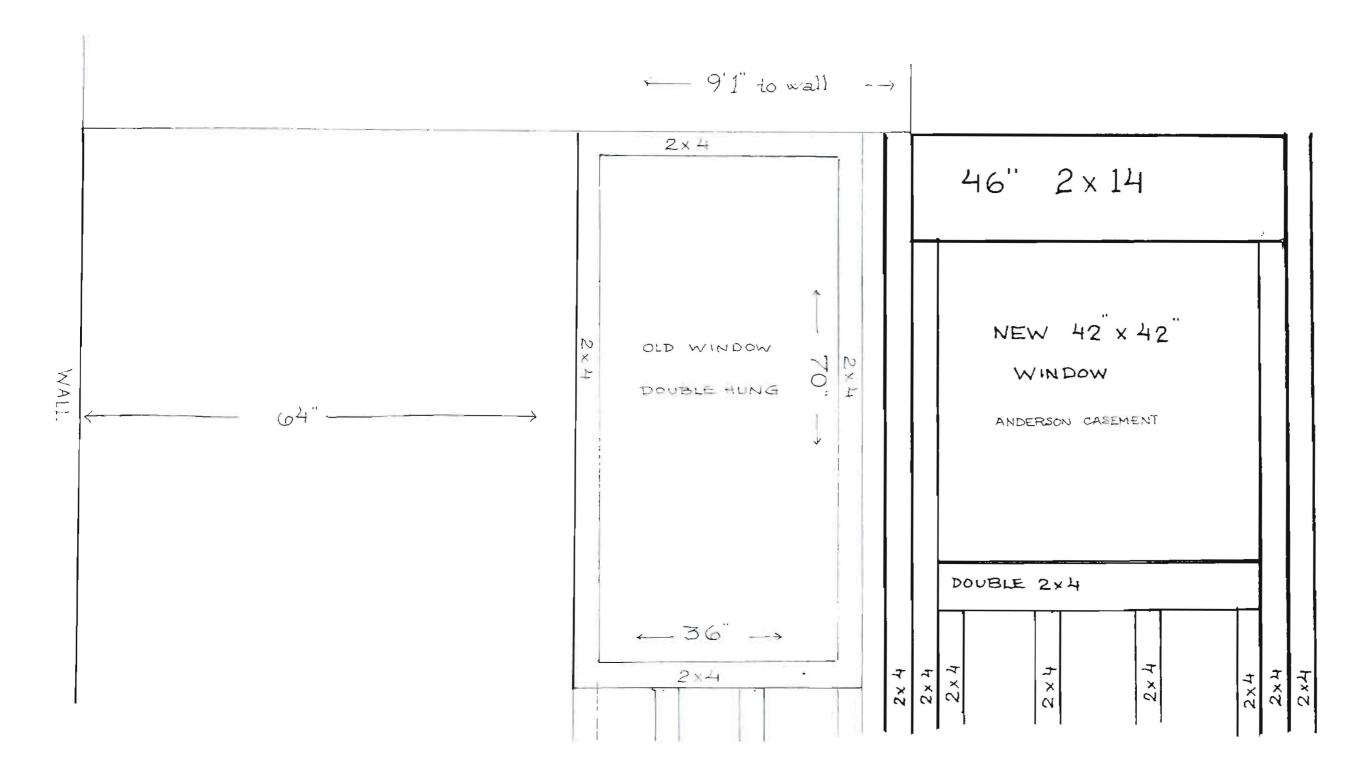

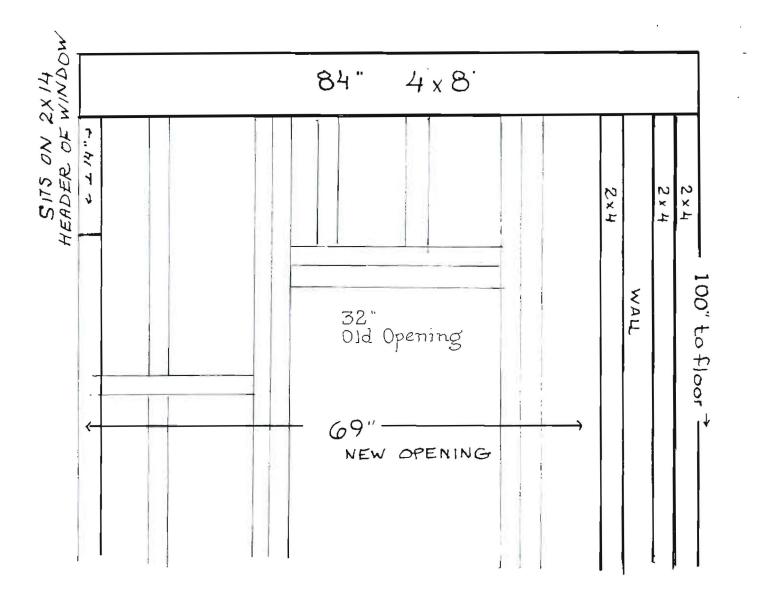

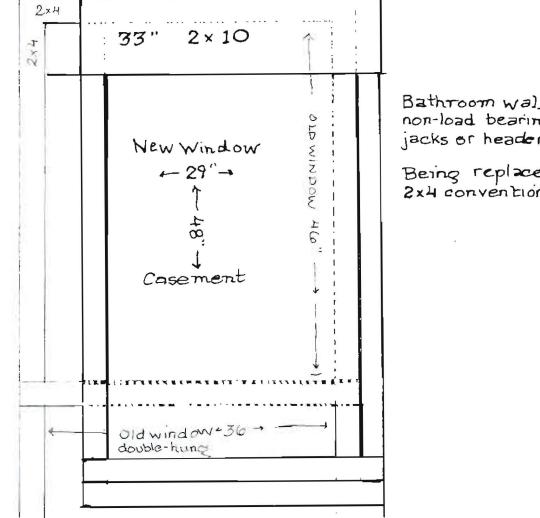

Bathroom wall was 2x3 non-load bearing with no jacks or header.

Being replaced with 2x4 conventional construction