


Street Frontage for Parcel- 80'
Existing Sign Setback-

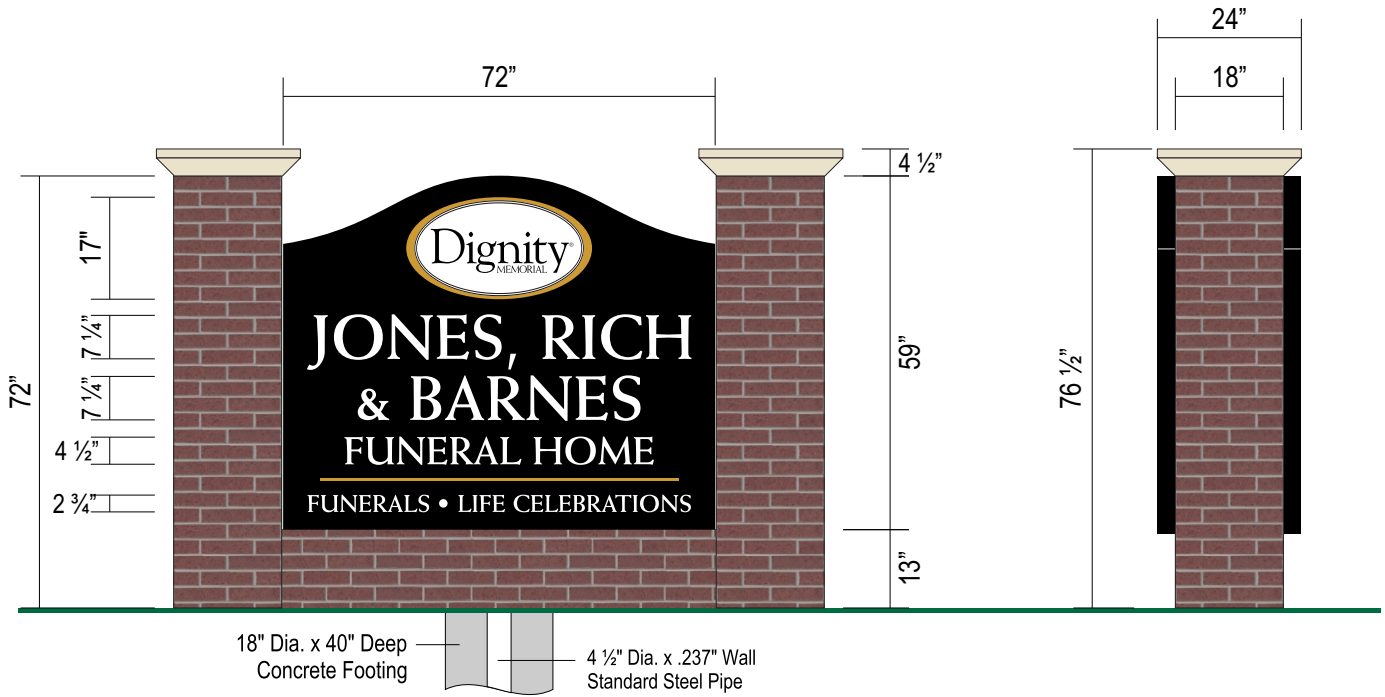

A D/F ILLUMINATED MONUMENT SIGN
Scale: 3/8" = 1'-0"

SCOPE OF WORK

- REMOVE EXISTING SIGN
- MANUFACTURE AND INSTALL **ONE (1)** NEW D/F MONUMENT SIGN WITH BRICK BASE AND COLUMNS (TYPE OF BRICK IS TO BE VERIFY)

SPECIFICATIONS

- SIGN FACES TO BE ROUTED .125 ALUMINUM BACKED w/ 3/16" ACRYLIC
- ALL COPY AND GRAPHICS TO BE 1ST SURFACE VINYL
- FALSE REVEAL TO BE 3M 3630-31 METALLIC GOLD

COLORS

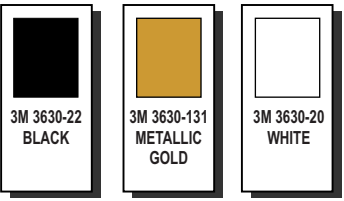


PHOTO SURVEY OF EXISTING
Scale: Not to Scale

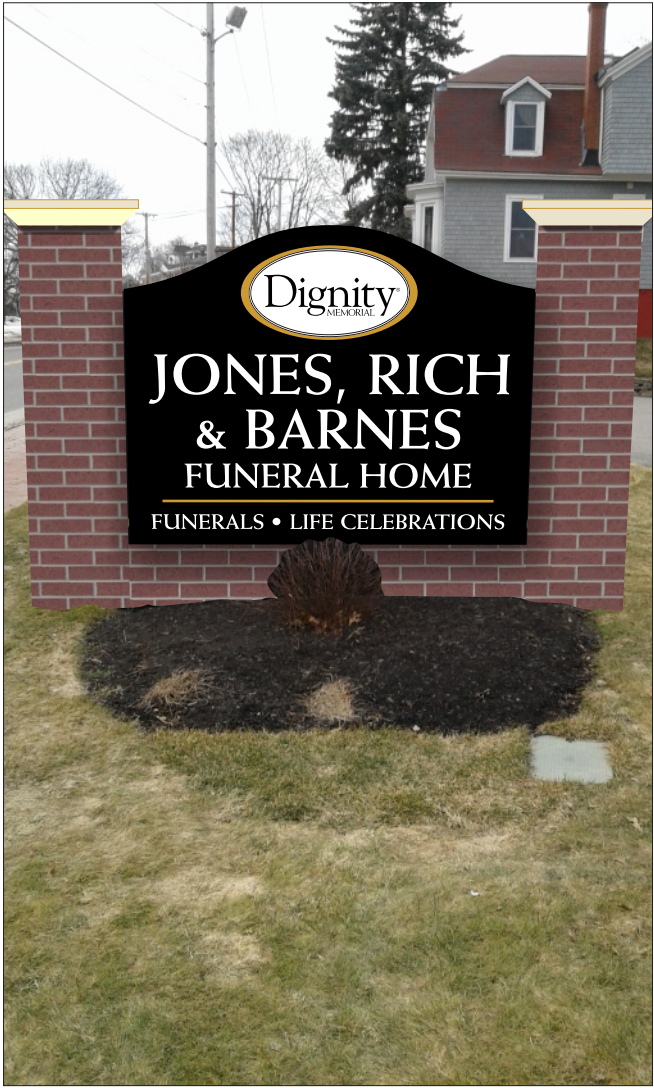


PHOTO SURVEY OF PROPOSED
Scale: Not to Scale



Client: **SCI DIGNITY 1633**
Address: **199 WOODFORD ST**
Location: **PORTLAND, ME 04103-5601**
Sales: **NK** Designer: **GD**
Date: **04.11.17** PM **TG**

This is an original drawing created by Walton. It is submitted for your personal use, however, it shall at all times remain the property of Walton. It may be used in connection with the project being planned for you by Walton, but not otherwise. You are not authorized to show these drawings to anyone outside your organization, nor is it to be reproduced, used, copied or exhibited in any fashion.

Revision:
R0) 4.11.17 DRAWING CREATED - GD

Signs will be manufactured with 120 Volts A/C. All Primary electrical service to the sign, and final connection thereof, is the responsibility of the buyer. All work is to be done in accordance with the purchase agreement attached hereto. In case of variance between the specifications of the purchase agreement and this drawing, the drawing shall prevail.

This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and/or other applicable local codes. This includes proper grounding and bonding of the sign.

Approvals:
Sales: _____ Date: _____
P.M.: _____ Date: _____
Design: _____ Date: _____
Client: _____ Date: _____

CID157436