

GENERAL DEMOLITION NOTES

1. ALL WORK TO BE SEQUENCED AND SCHEDULED WITH OWNER.
2. G.C. SHALL PROVIDE AND ENGINEER ALL TEMPORARY SUPPORT AND SHORING AS REQUIRED.
3. G.C. TO PROTECT ADJACENT AREAS NOT AFFECTED BY CONSTRUCTION.
4. G.C. TO FIELD VERIFY ALL CONDITIONS PRIOR TO BIDDING AND CONSTRUCTION.
5. ALL EXISTING MATERIALS NOTED TO BE REMOVED SHALL BE PROPERLY DISPOSED OF BY G.C. UNLESS OTHERWISE NOTED. OWNERS RESERVE THE RIGHT TO RETAIN AN ITEM NOTED FOR DEMOLITION.
6. G.C. SHALL COORDINATE EXTENT OF ALL DEMOLITION WORK WITH NEW CONSTRUCTION. REFER TO COMPLETE DRAWING SET TO COORDINATE DEMOLITION WORK WITH OTHER TRADES.
7. ALL ELECTRICAL, PLUMBING AND MECHANICAL LOCATED IN WALLS AND CEILING NOTED TO BE REMOVED SHALL BE EITHER REMOVED BACK TO SOURCE OR LOCATED OUT OF HARMS WAY FOR RELOCATION IN NEW CONSTRUCTION, G.C. TO COORDINATE.


KEYNOTES

- | | | |
|--|---|--|
| <ul style="list-style-type: none"> 1 REMOVE DOOR + FRAME 2 REMOVE PORTION OF WOOD FRAME WALL PATCH WALL/ FLOOR/ CEILING TO REMAIN AS NECESSARY 3 REMOVE LIGHT FIXTURE. SEE ELECTRICAL FOR FURTHER ELEC. DEMO 4 REMOVE COUNTER AND SHELVING 5 REMOVE BASEBOARD HEATER/CAP LINES SEE MECHANICAL FOR FURTHER MECH. DEMO 6 REMOVE COUNTER AND SHELVING PATCH WALL/ FLOOR AS NECESSARY 7 REMOVE SWINGING GATE 8 REMOVE MASONRY WALL SHORE AND BRACE AS NECESSARY PATCH FLOOR/WALLS AND CEILING TO REMAIN DEMO TO 4" BELOW EXISTING FLOOR LEVEL FOR INSTALLATION OF NEW FLOOR DECKING 9 REMOVE FLOOR FRAMING. SHORE STRUCTURE AS NECESSARY 10 REMOVE WALL SILL BELOW FOR INSTALLATION OF NEW DOOR 11 REMOVE WINDOW/ PORTION OF EXTERIOR WALL BELOW 12 REMOVE PORTION OF WALL/ FRAMING AS NECESSARY FOR NEW BOOK DROP. PATCH EXTERIOR + INTERIOR AS NECESSARY | <ul style="list-style-type: none"> 13 REMOVE EXISTING CARPET 14 REMOVE EXISTING PLANK FLOOR. PREP SUBFLOOR FOR NEW FINISH 15 REMOVE DOORS, FRAME AND WING WALLS PATCH WALLS, FLOOR, CEILING AS NECESSARY 16 REMOVE EXTERIOR WINDOW, TRIM AND FRAME. 17 REMOVE PORTION OF RAILING, PATCH FLOORING 18 REMOVE PORTION OF WALL, DOOR AND FRAME SALVAGE DOOR AND FRAME FOR REUSE 19 NOT USED 20 REMOVE STAIR LIFT TRACK AND ASSOCIATED WIRING AND SWITCHES. PATCH WALL/ WINDOW SILL AND TRIM AS NECESSARY. 21 REMOVE EXISTING DRINKING FOUNTAIN. SALVAGE FOR REUSE. 22 SHELVING REMOVED BY OWNER, PAINT EXISTING WALL. EXISTING WOOD CLEAT TO REMAIN. 23 REMOVE DOOR AND FRAME/SALVAGE FOR USE IN NEW CONSTRUCTION. 24 SALVAGE HARDWARE FOR REUSE 25 REMOVE EXISTING STEEL TUBE COLUMNS, BEAM AT CEILING. SHORE STRUCTURE S NECESSARY. PATCH/ REPAIR GWB CEILING. 26 REMOVE WALL AS NECESSARY FOR LU/LA SHAFT WALL/REINFORCEMENT INSTALLATION. | <ul style="list-style-type: none"> 27 ADD ALTERNATE NO. 1 REMOVE WINDOW SASHES FOR NEW JAMB LINERS AND REPLACEMENT WINDOW SASHES 28 REMOVE EXISTING VCT TILE 29 REMOVE PORTION OF SLAB FOR NEW FOOTING 30 REMOVE BOLLARD |
|--|---|--|

1 Second Floor Demolition Plan
SCALE: 1/4" = 1'-0"


LDD PROJECT NAME:
N/A
DRAWING NAME:
FIELD BOOK USED:
N/A

Scott Simons Architects
75 York Street, Portland, Maine 04101
www.scottsimons.com
207.772.4666



REFERENCES:

DESIGNED BY: AKS	DRAWN BY: AKS	CHECKED BY: AKS	SCALE: AKS	DATE: 02/06/15
---------------------	------------------	--------------------	---------------	-------------------

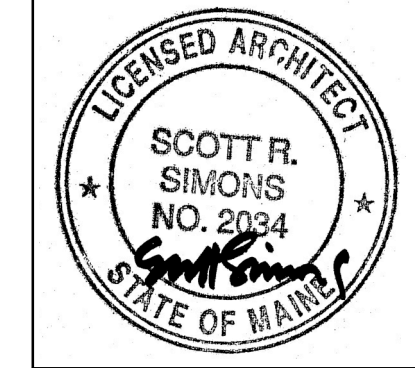

PORTLAND PUBLIC LIBRARY
BURBANK BRANCH
377 Stevens Avenue
Deering Center
Portland, Maine 04103

CITY OF PORTLAND, MAINE
Addition + Renovation for
The Burbank Branch Library
ISSUED FOR PERMITTING

SECOND FLOOR DEMOLITION PLAN

SHEET # **AD102**
PLAN NUMBER