


GENERAL NOTES



1. ELECTRICAL DEVICES TO BE REMOVED ARE INDICATED ON THE REMOVAL DRAWINGS. ITEMS TO REMAIN IN PLACE ARE INDICATED WITH "RM".
2. CONTRACTOR SHALL IDENTIFY DEVICES DURING INITIAL SITE VISIT AND REMOVE ALL DEVICES AS REQUIRED.
3. PROVIDE BLANK PLATES AT ABANDONED DEVICE LOCATIONS AND REMOVE WIRING BACK TO SOURCE PANEL. MAINTAIN CONTINUITY TO EXISTING DEVICES THROUGH SPLICES, (PER NEC), WHERE DEVICES ARE REMOVED ON COMMON CIRCUITS.
4. REMOVED LIGHT FIXTURES SHALL BE TURNED OVER TO OWNER. CONTRACTOR SHALL COORDINATE WITH THE OWNER FOR THE DISPOSAL OF UNWANTED FIXTURES.

FIRST FLOOR PLAN
SCALE: 3/16"=1'-0"

- ELECTRICAL KEY NOTES**
1. REMOVE EXISTING LIGHT FIXTURE.
 2. REMOVE AND RELOCATE EXISTING LIGHT SWITCHES.
 3. REMOVE EXISTING DEVICE ALONG WITH ASSOCIATED WIRING AND CONDUIT BACK TO PANEL. PROVIDE BLANK PLATE TO COVER DEVICE BOX. MARK PANEL BREAKER LOCATION AS "SPARE".
 4. REMOVE EXISTING FIRE ALARM DEVICE.
 5. REMOVE AND SAFELY DISCARD EXISTING CEILING FAN ALONG ALL ASSOCIATED SWITCHING AND WIRING. REMOVE WIRING BACK TO PANEL.
 6. REMOVE AND RELOCATE EXISTING 10X10X6 (APPROX) JUNCTION BOX, WIRING AND BACKER BOARD. REFER TO DRAWING E1 FOR NEW LOCATION.

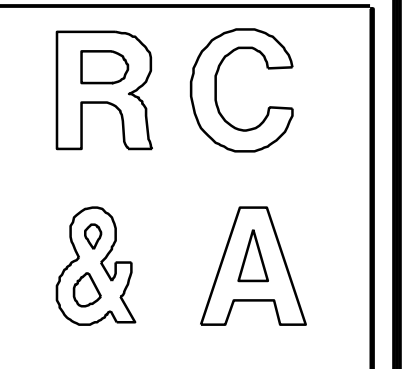

Richard Curtis & Associates
 PO Box 9739-1150
 Portland, ME 04104-5039
 Phone: (207)797-6300
 Fax: (207)797-6303
 rc Curtis Associates Inc@me.rr.com

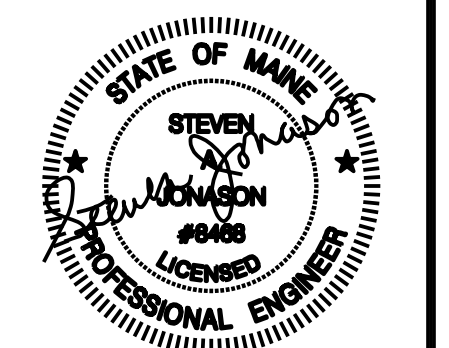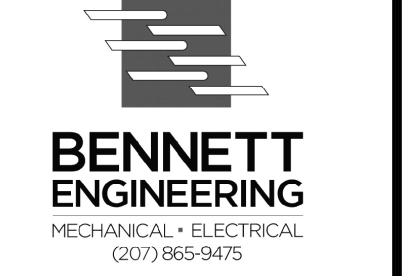

Owner:
 DIOCESAN BUREAU OF HOUSING
 800 FOREST AVE
 PORTLAND, ME

Contractor:
 DICON CONSTRUCTION
 510 OCEAN AVE
 Portland, ME

Project:
 RENOVATIONS TO DEERING PAVILION
 800 FOREST AVE
 PORTLAND, ME

Project No: 12404
 Drawing Title:
 FIRST FLOOR REMOVAL PLAN
 Scale: As Noted
 Date: 1 December 2014
 Revision Dates:

Drawing Number:
 ER1