


# Greenstar 151P Quick Reference Specifications

## Greenstar Combi 151P ZWB42-3

Fuel	NG or LP with optional gas conversion kit
Input Maximum (MBH)	151.6
Input Minimum (MBH)	36.0
AFUE	95%
DHW Flow Max ( $\Delta T$ at 72°F)	4.0 GPM
Dimensions (W x HxD)	17 1/2 x 33 1/2 x 13 1/2
Boiler Weight w/o packaging	110.2 lbs
Supply / Return Tappings	1"
Gas Connection Size	3/4"
Vent Size	2" -3"
Vent Material	PVC / CPVC / PP
Domestic Water Supply	3/4"
<b>Warranty</b>	<b>Limited Life Heat Exchanger</b> <b>5-Year Parts</b> <b>1-Year labor</b>

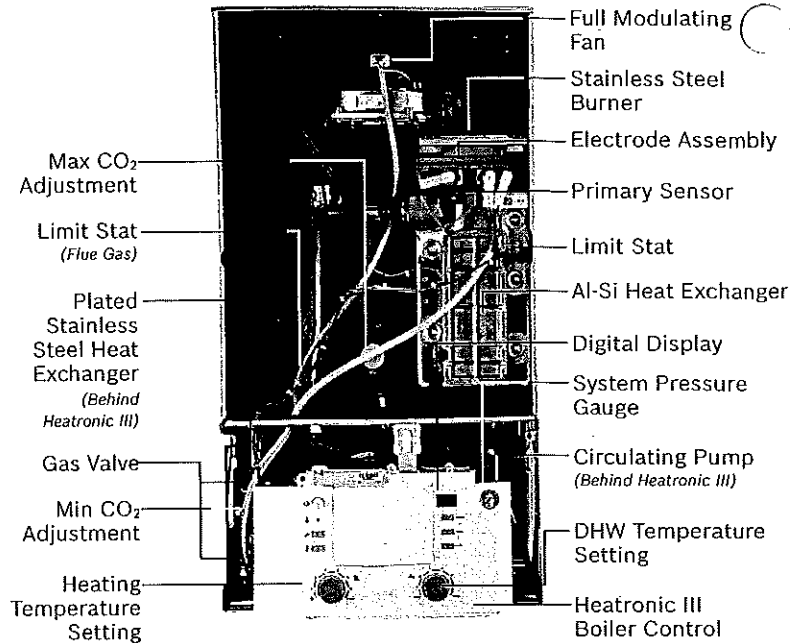

## Optional Controls and Accessories

Floor Base	FW200 Weather Compensation Boiler Control	NSC Controls	CT100 Control	Venting & Gas Conversion Kit	Maintenance Accessories
<p>Shown with and without cover</p> <p>The Greenstar installation stand is a convenient option to use the Greenstar wall-boilers on the floor when wall mounting is not convenient.</p> <p><b>Part # 77738111216</b></p>	<p>The FW200 digital thermostat and outdoor reset boiler control is programmable with up to six switching times throughout the day. The interface can be installed within the appliance or be wall mounted in any location in home. It provides feedback to the end-user and has built-in diagnostic to effortlessly pinpoint operational issues.</p> <p><b>Part # 87182262150</b></p>	<p>Bosch offers comfort room controllers that can be used in single or multi-zone applications, similar to conventional on/off thermostats in style and use but provide additional energy savings and comfort.</p> <ul style="list-style-type: none"> <li>▶ <b>CZM100:</b> Three zone control module, for circulator pumps or zone valve activation. <b>Part # 7738110112</b></li> <li>▶ <b>CRC200:</b> Programmable controller with an integrated temperature sensor. <b>Part # 7738111034</b></li> <li>▶ <b>CRC100:</b> Integrated temperature sensor with basic thermostat functions. <b>Part # 7738110090</b></li> </ul>	<p>Internet-connected control with advanced features such as: weather compensation, home presence detection for customized comfort levels; innovative programming for intelligent conversation with boiler and early warning via error messages to your smart device</p> <p><b>Part # 7736700988</b></p>	<p><b>Concentric up and out vent kit</b> <b>Part # 7738003218</b></p> <p><b>Twin Pipe Adapter</b> <b>Part # 87182262890</b></p> <p><b>Gas Conversion Kit ZWB41-31 from NG to LPG</b> <b>Part # 87377017460</b></p>	<p><b>Cleaning Brushes (Set of 5)</b> <b>Part # 7719002502</b></p> <p><b>Cleaning Tool</b> <b>Part # 7719002503</b></p> <p><b>Condensate Neutralizer &amp; Media JM-6C</b> <b>Part # 7738003181</b> <b>Media Part # 7738003184</b></p>

Bosch Thermotechnology Corp.  
Londonderry, NH • Ft. Lauderdale, FL  
General Inquiries: 1-866-642-3198  
Contractor Technical Support: 1-800-283-3787

www.boschheatingandcooling.com

Copyright© 2016 Bosch Thermotechnology Corp.  
All rights reserved.  
75H995171B 07/2016