


FLOOR PLAN

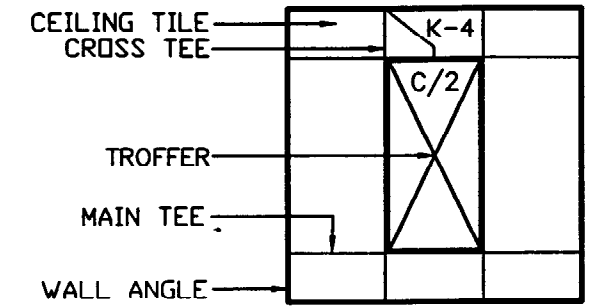

CEILING PLAN

USE ALL HOT LEADS FROM A-6 POWER ENTRY.

MODULAR WIRING SYSTEMS

NOTE: This system meets the 1996 NEC. All components used are UL approved or recognized standard. Installation of the Modular Wiring System constitutes customers agreement to the following: Final Electrical hook-up, Power run to building, installation of the breaker panel and on-site inspection of the system are to be done by a licensed electrician and prior to our installers finishing (if applicable) without causing delay. These services are not included in our package, regardless if National Partitions installs the building or not. Should any part be found faulty, National Partitions shall send a replacement part free in accordance to our Warranty, labor charges for any reason, such as inspection and replacement etc. are not covered under National Partitions Warranty.

Typical: Power entry ("A" assembly) originating from the breaker panel contains three branch circuits identified as follows: C/1 Red Wire (hot), C/2 Black Wire (hot), C/3 Blue Wire (hot). White and Gray wires are neutral, Green is ground. Flex conduit should be secured every 4-1/2 feet.

WARNING: Risk of fire or electrical shock. Do not electrically connect any panel or assembly to more than one power source. Always determine that each panel or assembly is connected to only one electrical power source.

NOTES:

1. ALL DIMENSIONS ARE CENTERLINE UNLESS OTHERWISE NOTED.
2. ALL PANELS OF LIKE SIZE ARE INTERCHANGEABLE.
3. SOME PIECES MAY REQUIRE FIELD CUTTING.
4. DOORS ARE STANDARD 36"X 84" HM AND INCLUDE: 3/16" TEMPERED SAFETY GLASS.
5. DRAWINGS ARE NOT TO SCALE UNLESS OTHERWISE SPECIFIED.
6. HL'S INCLUDE 3/16" TEMPERED SAFETY GLASS.
7. BREAKER-PANEL LOCATION TO BE FIELD VERIFIED.
8. TIE WIRE @ EVERY 4' ON MAIN TEE.
9. BLDG. TO BE FURNISHED W/TOUCH UP PAINT.
10. BLDG. TO BE FURNISHED W/1-1/2"X1-1/8' ROOF FASCIA -ANGLE.

SYMBOLS		PANELS		CUSTOMER	SHIP TO.	DRAWN BY:	PRODUCTION #
☐ DOUBLE SWITCH	⊕ A/C AIR CONDITION OUTLET	S SOLID PANEL 4FT.	EXTERIOR FINISH: ET. GRAY	COASTAL EQUIPMENT CORP. 142 PRESUMPCOT STREET PORTLAND, ME 04103	COASTAL TO FOLLOW	ARCILLA	802719
☐ DOUBLE STACKED OUTLETS	⊕ H HEATER OUTLET	S ₂ SOLID PANEL 2FT.	INTERIOR FINISH: ET. GRAY			CHCKED BY:	WAREHOUSE# 06
☐ STACKED OUTLETS & SWITCH	⊕ F FAN OUTLET	HL HALF LITE 4FT.	INSIDE HEIGHT: 88"	P.O. # 008507		REV:	2-10-00
☐ PHONE / DATA OUTLET	⊕ F DUPLEX OUTLET	HL ₂ HALF LITE 2FT.	PANEL HEIGHT: 96"			REV:	SHEET NO: 1 OF 2
		SG SLIDING GLASS DOOR	AIR COND. CUT OUT				
		DL DOOR LITE	HT: -----				
		DD DOUBLE DOOR	WT: -----				
		DL _{DL} DOUBLE DOOR LITE					

