



- FLOOR FINISH NOTES:
1. IN MOST PLACES THE TOP SHEATHING HAS BEEN REMOVED LEAVING ORIGINAL ROUGH SHEATHING & ONE LAYER OF 3/4\"
 2. AT CARPET, PROVIDE 1/2\"
 3. AT WD FINISH FLOORS, PROVIDE 1/2\"
 4. STRUCT LEVELING HAS BEEN ON GOING AND WILL NEED TO BE EVALUATED FOR LEVELNESS WHEN CONSTRUCTION BEGINS - WHERE THE FLOOR IS NOT LEVEL, PROVIDE LEVELING COMPOUND BEFORE FINISHES ARE APPLIED

FLOOR NOTE:
 FLOOR STRUCT NEEDS TO BE ADJUSTED/
 SUPPORTED FOR A FLAT SURFACE - IF
 FLOOR IS NOT FLAT, PROVIDE LEVELING
 COMPOUND (TYP)

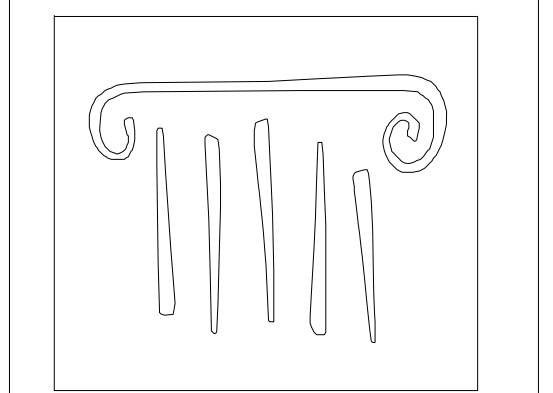

65 NEWBURY STREET
 PORTLAND, ME 04101
 207.761.9000
 info@portcityarch.com
 WWW.PORTCITYARCH.COM

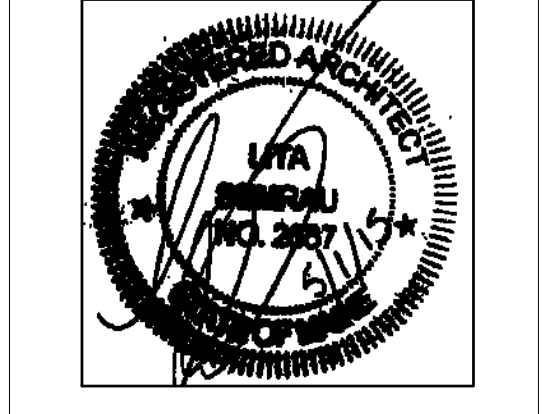

UNE
 UNIVERSITY OF
 NEW ENGLAND

Allied Engineering
 Structural Mechanical Electrical Commissioning

CONSIGLI
 Est. 1905

BECKER
 STRUCTURAL ENGINEERS

PERMIT SET

REVISIONS		
No.	Description	Date

**UNIVERSITY OF
 NEW ENGLAND**
 PORTLAND, MAINE

**ALUMNI HALL
 RENOVATION**

SECTION

Project Number 14525
 Date May 01, 2015
 Drawn by JP TS SM AR
 Checked by LAS

A3.1
 Scale AS NOTED

1 SECTION
 SCALE: 1/4" = 1'-0"