




Focus Industries - Aluminum Low Voltage Step/Deck/Brick Light Available w/ LED Lamp

Manufacturer: [Focus Industries](#)
Item Number: RLLD2125FOC

Outdoor Low Voltage Landscape Lighting Louvered Brick step/deck lighting specifications:

- FACE PLATE: Heavy duty stamped aluminum
- BACK BOX: Heavy duty stamped galvanized steel powder coated high reflective white
- LENS (-AL & -1L MODELS ONLY): High impact white acrylic
- GASKET: Black neosponge closed cell; .190" thickness
- LAMP SUPPLIED: 2 x 18 watt S-8 #1141; 1200 hours average rating (25w max.)
- LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 2.2w 50,000 hours average rating OMNI-2 LED
- LED lamp option: SC Base LED, 2700K, 50,000 hour average rated Operating range of 9v - 18v (OPTIMUM 10v-15v)
- SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s) with 200° C silicone lead wires
- WIRING: Black 3 foot 18/2 zip cord (12v. only)
- CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)
- FINISH: Aluminum - Black texture polyester powder coat; optional finishes available

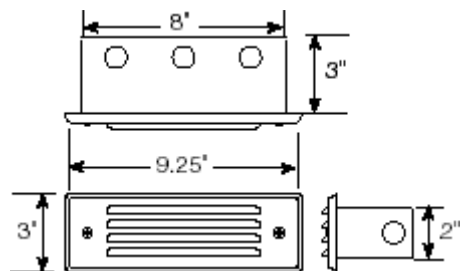

Read what other customers had to say about this product:

- See more at: http://www.residential-landscape-lighting-design.com/store/high_voltage_aluminum_recessed_step_lights_RLLD2125FOC.htm#sthash.fgGAbmFj.dpuf