

[Home](#)

[Cart](#)

NEW CLASSICS

[Exterior Lighting](#)

[Interior Lighting](#)

[Alabaster Lighting](#)

[Design Styles](#)

[Recent Additions](#)

Home > Exterior Lighting > London Lantern > London Scrolled Drop Exterior Wall Light >

London™ Lantern 7" Wide Scrolled Drop Exterior Wall Light



[Larger Photos](#)
[Email a Friend](#)



Light Fixtures Made for You
 Design Your Own



[learn more](#)

Our London Lantern's character was inspired by the stately glass-enclosed conservatories designed for elegant homes and country estates by 19th century British architects.

Starting Price \$860.00

Availability: Usually Ships in 2 to 3 Weeks

Product Code: EX-5707-A37

Choose Your Options:

- Finish*: [?](#) Select [View Metal Finish](#)
- Options
- Art [?](#) Select
- Glass*: [?](#) View Glass Panel Options
- Finial [?](#) Select
- Options*: [?](#) View Finial Options
- Socket [?](#) Select
- Type*: [?](#)
- Notes: [?](#)
- Tag: [?](#)

Qty: [+](#) [Add To Cart](#)

London™ Lantern 7" Wide Scrolled Drop Exterior Wall Light

- Dimensions as shown:
 - 7" roof width
 - 10 1/2" lantern height
 - 14 1/2" overall length
 - 11" projection
 - 5" w x 7 1/4" h mounting plate
- Socket Types:
 - Medium screw in base accepts:
 - 1/150 watt max. incandescent
 - or 1/42 watt max. self-ballasted compact fluorescent (CFL)
 - or self-driven LED
 - Candelabra base cluster accepts:
 - 2/60 watt max. incandescent
 - or 2/13 watt max. self-ballasted compact fluorescent
 - or 2 self-driven candelabra base LED's
 - GU24 base accepts:
 - 1/42 watt max. self-ballasted bi-pin fluorescents
- Handmade in U.S.A
- UL listed for exterior use

[Click to view all sizes and mounting options on the London Lantern Family.](#)

London Finial Options



Classical Acorn



Onion

Browse for more products in the same category as this item:

Exterior Lighting > London Lantern > London Scrolled Drop Exterior Wall Light
Exterior Lighting Mount Types > Exterior Wall Lights
Exterior Lighting > London Lantern > London Wall
Exterior Lighting > London Lantern

 [Home](#)

 [Showroom](#)

 [Cart](#)

[Contact Us](#)

[About Us](#)

[Resources](#)

Brass Light Gallery®

1101 West St. Paul Avenue Milwaukee, WI 53233
Copyright © 2014 Brass Light Gallery All Rights Reserved.

Ecommerce Software by Volusion




Focus Industries - Aluminum Low Voltage Step/Deck/Brick Light Available w/ LED Lamp

Manufacturer: [Focus Industries](#)
Item Number: RLLD2125FOC

Outdoor Low Voltage Landscape Lighting Louvered Brick step/deck lighting specifications:

- FACE PLATE: Heavy duty stamped aluminum
- BACK BOX: Heavy duty stamped galvanized steel powder coated high reflective white
- LENS (-AL & -1L MODELS ONLY): High impact white acrylic
- GASKET: Black neosponge closed cell; .190" thickness
- LAMP SUPPLIED: 2 x 18 watt S-8 #1141; 1200 hours average rating (25w max.)
- LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 2.2w 50,000 hours average rating OMNI-2 LED
- LED lamp option: SC Base LED, 2700K, 50,000 hour average rated Operating range of 9v - 18v (OPTIMUM 10v-15v)
- SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s) with 200° C silicone lead wires
- WIRING: Black 3 foot 18/2 zip cord (12v. only)
- CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)
- FINISH: Aluminum - Black texture polyester powder coat; optional finishes available

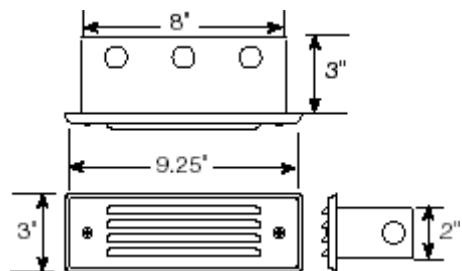

Read what other customers had to say about this product:

- See more at: http://www.residential-landscape-lighting-design.com/store/high_voltage_aluminum_recessed_step_lights_RLLD2125FOC.htm#sthash.fgGAbmFj.dpuf