

**City of Portland, Maine – Building or Use Permit Application** 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 777 Stevens Ave		Owner: Home for the Aged		Phone:		Permit No: 980005	
Owner Address:		Lessee/Buyer's Name:		Phone:		BusinessName:	
Contractor Name: Main Gas		Address: P.O. Box 1090 766 Roosevelt Trail Windham, ME 05062		Phone: 892-1683-1744		Permit Issued: JAN - 6 1998	
Past Use: Elderly Apts		Proposed Use: Same		COST OF WORK: \$		PERMIT FEE: \$ 35.00	
				FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group: Type:	
				Signature: [Signature]		Signature:	
Proposed Project Description: Install 1,000 gallon A/G Propane Tank				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)			
				Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/>			
				Signature:		Date:	
Permit Taken By: Mary Gresik		Date Applied For: 17 December 1998					

**PERMIT ISSUED**  
JAN - 6 1998  
**CITY OF PORTLAND**

Zone: CBL: 146-B-005  
Zoning Approval:  
Special Zone or Reviews:  
 Shoreland  
 Wetland  
 Flood Zone  
 Subdivision  
 Site Plan maj  minor  mm

Zoning Appeal  
 Variance  
 Miscellaneous  
 Conditional Use  
 Interpretation  
 Approved  
 Denied

Historic Preservation  
 Not in District or Landmark  
 Does Not Require Review  
 Requires Review

Action:  
 Approved  
 Approved with Conditions  
 Denied

Date: \_\_\_\_\_

- This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.

**PERMIT ISSUED WITH REQUIREMENTS**

**CERTIFICATION**

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT: Stephen McCusker ADDRESS: DATE: 17 December 1997 PHONE: 892 6744

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

CEO DISTRICT

## FIRE CODE PERMIT REPORT


DATE: 1/5/98 ADDRESS: 777 Stevens DrPERMIT TO: St. Marg's

OWNER/CONTRACTOR: \_\_\_\_\_


APPROVED  DENIED \_\_\_\_\_CONDITIONS OF APPROVAL/DENIAL

1. The boiler or furnace shall be protected by enclosing with one hour fire rated construction including fire doors and ceiling or by providing automatic extinguishment and smoke protected enclosure. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply system having a capacity sufficient to provide a 0.15 gpm, per square foot of floor throughout the entire area. An indicating shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
2. All required Fire Alarm Systems shall have the capability of "Zone Disconnect" via switches or key pad program provided the method is approved by the Fire Prevention Bureau.
3. All remote annunciators shall have a visible "trouble" indicator along with the Fire Alarm "Zone" indicators.
4. Any Master Box connected to the Municipal Fire Alarm System shall have a supervised Municipal Disconnect Switch.
5. All Master Box locations shall be approved by the Fire Department Director of Communications. A Master Box shall be located so that the center of the box is five feet above finished floor.
6. All Master Box locations are required to have a locked box (knobbox).
7. A fire alarm acceptance report shall be submitted to the Portland Fire Department.
8. All underground tank removal(s) and/or installation(s) shall be done in accordance with the Department of Environmental Regulations (Chapter 691).
9. No cutting of tanks on site. Cutting of tanks is to be done at an approved tank disposal site.
10. Fire Dispatcher must be at least 48 hours in advance of removal and/or transportation of tanks.
11. All above ground L/P storage tanks shall be located in accordance with NFPA 58 Standards.
12. Any tank located near the path of vehicle movement shall be protected with appropriate permanent barricades.

13. All piping shall be protected from possible mechanical damage and vandalism.
14. A 1" storm fire department connection is required.
15. Any new sprinkler construction over six sprinkler heads needs to have State Fire Marshal approval.
16. Any renovations of sprinkler systems over 20 sprinkler heads needs to have State Fire Marshal approval.
17. A sprinkler performance test shall be submitted to the Portland Fire Department after completion of sprinkler work.
18. State Fire Marshal approval is required for this project.

  
L. J. McDougall  
Fire Prevention Officer  
City of Portland

Temporary Heat

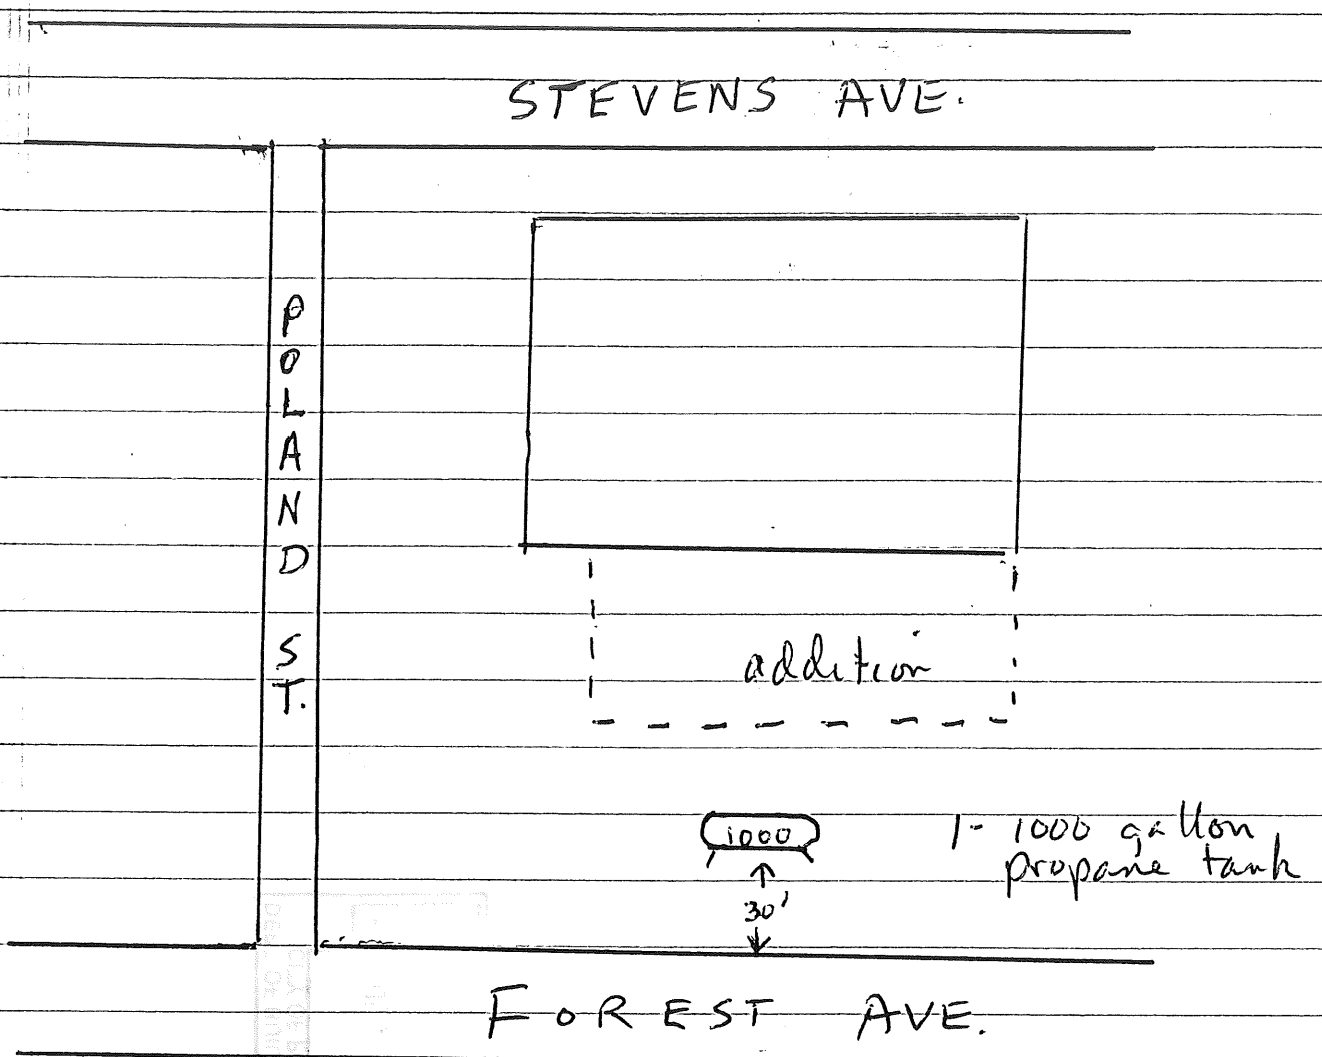

customer: Park Danforth #797-7710  
777 Stevens Ave.  
Portland, Maine 04103

Contractor: Maingas  
P.O. Box 1090  
Wintham, Me 04062