



September 1, 2015

TENG BARRY

1056 FOREST AVE

PORTLAND, ME 04103

CBL: 146 B011001

Located at 1056 FOREST AVE

NOTICE OF INTENT TO PROSECUTE

Dear Owner/Manager/Occupant,

An inspection of the property located at the address referenced above revealed that the structure and premises fail to comply with NFPA 2009 Fire Code and/or NFPA Life Safety Codes. Attached is a list of those violations.

The above-referenced property is in violation of the Chapter 10, Fire Prevention and Protection, Article 1 of the Portland City Code (the "Code") and National Fire Protection Association (NFPA) 101 Life Safety Code. Please note that the Code is available online at [www.portlandmaine.gov](http://www.portlandmaine.gov).

This is a notice of intent to prosecute. As such, the matter is being referred to the City of Portland Corporation Council for legal action and possible civil penalties as provided for in Chapter 10, Fire Prevention and Protection, 10-25 of the Code and in Title 30- A.M.R.S.A. 4452.

Please be advised that you will need to contact the Fire Prevention Bureau at 207-874-8400 before the court date on the attached Reference to Court letter to either schedule a re-inspection or to submit a plan of action to correct these violations.

Sincerely,

Portland Fire Department

Fire Prevention Bureau

**CITY OF PORTLAND  
PORTLAND FIRE DEPARTMENT**

380 Congress Street  
Portland, Maine 04101

**Inspection Violations**

<b>Owner/Manager</b> TENG BARRY		<b>Inspector</b> John Hardy, Iii	<b>Inspection Date</b> 8/31/2015
<b>Location</b> 1056 FOREST AVE	<b>CBL</b> 146 B011001	<b>Status</b> Failed	<b>Inspection Type</b> Fire Company-FP Routine Inspec

Code	Int/Ext	Floor	Unit No.	Area	Compliance Date
------	---------	-------	----------	------	-----------------

1) 9.002

**Violation:** NFPA 80- ANNEX D.4 1-HOUR FIRE DOORS ASSEMBLIES REQ; Listings are provided for floor fire door assemblies that are installed in fire-rated floor-ceiling or roof-ceiling assemblies that have been tested in accordance with the methods described in NFPA 288. The listing indicates the fire-rated assembly and the hourly rating (3 hours, 2 hours, 1.5 hours, 1 hour, .75 hours) for which the door can be permitted to be used so that access to the space above the ceiling or to the floor above can be provided without adversely affecting the fire resistance rating of the entire assembly. The listing provides limitations on the maximum size of an individual door opening and the total area of all door openings permitted for each 100 square feet of floor or ceiling.

**Notes:** ALL INTERIOR DOORS LEADING TO COMMON STAIRWAY NEED TO BE RATED FIRE DOORS,

2) 7.008

**Violation:** NFPA 101- 7.1.10.2.1 DEBRIS INSIDE BUILDING; NO FURNISHINGS, DECORATIONS, OR OTHER OBJECTS SHALL OBSTRUCT EXITS OR THEIR ACCESS THERETO, EGRESS THEREFROM, OR VISIBILITY THEROF.

**Notes:** REAR STAIRWAY FROM 1ST FLOOR TO 3RD FLOOR NEEDS TO HAVE ALL DEBRIS AND TRASH REMOVED

3) 8.001

**Violation:** NFPA 101- 9.6.10.1.1 SMOKE DETECTOR REQUIRED; Where required by another section of this code, single-station and multiple-station smoke alarms shall be in accordance with NFPA 72, National Fire Alarm Code, shall be provided in all occupiable areas in environments that are suitable for proper smoke detector operation.

**Notes:** NO SMOKE DETECTORS FOUND IN REAR STAIRWAY/AND BASEMENT

4) 2.120

**Violation:** NFPA 101- 8.3.5 HOLE IN WALL NEEDS REPAIR; The provisions of 8.3.5 shall govern the materials and methods of construction used to protect through-penetrations and membrane penetrations in fire walls, fire barrier walls, and fire resistance-rated horizontal assemblies. The provisions of 8.3.5 shall not apply to approved existing materials and methods of construction used to protect existing through-penetrations and existing membrane penetrations in fire walls, fire barrier walls, or fire resistance-rated horizontal assemblies, unless otherwise required by chapters 11 through 43.

**Notes:** NUMEROUS HOLES IN BOTH FRONT AND REAR STAIRWAYS NEED TO BE REPAIRED

5) 3.011

**Violation:** NFPA 101- 31.3.2.1.1 BOILER PROTECTION REQUIRED; THE AREAS DESCRIBED IN TABLE 31.3.2.1.1 SHALL BE PROTECTED AS INDICATED:  
BOILER AND FUEL-FIRED HEATER ROOMS SERVING MORE THAN A SINGLE DWELLING UNIT (MINIMUM SEPARATION/PROTECTION IS 1 HOUR OR SPRINKLERS)

**Notes:** NO BOILER PROTECTION OVER WALL MOUNTED GAS FURNACE

**Comments:**

STATE OF MAINE

DISTRICT COURT  
Location: Portland  
Docket No.

CITY OF PORTLAND and body politic and  
Corporate, located in the County of  
Cumberland and State of Maine,

Plaintiff,

v.

Barry Teng  
Defendant


**FIRE PREVENTION AND PROTECTION  
CODE VIOLATION**

**(M.R. CIV. P. 80H AND 80k)**

SUMMONS NUMBER: 354864

This matter has been referred to the Corporation Counsel's Office for immediate legal action with respect to the code violations detailed in the attached letter. It has been assigned the above summons number and will be filed with the Portland District Court and will be assigned for an initial appearance at the Portland District Court 205 Newbury Street Portland, Maine 04101 at 8:30 A.M. on 11/09/15. I strongly urge you to contact Victoria Meserve at Fire Prevention at (207)-874-8400 or via e-mail at [meservev@portlandmaine.gov](mailto:meservev@portlandmaine.gov) to set up an in-person meeting to resolve these issues or make alternative arrangements to relieve you of the requirement to appear in Court on 11/09/15.

Dated: 9/10/15

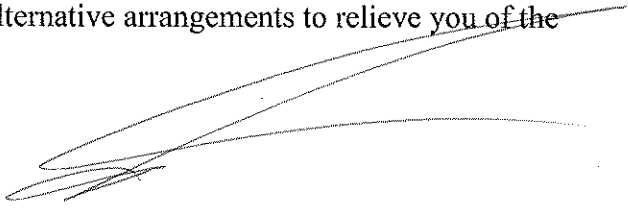

---

Adam R. Lee, Esq. Bar No. 4143  
Associate Corporation Council  
City of Portland  
389 Congress St  
Portland, ME 04101  
207-874-8480