
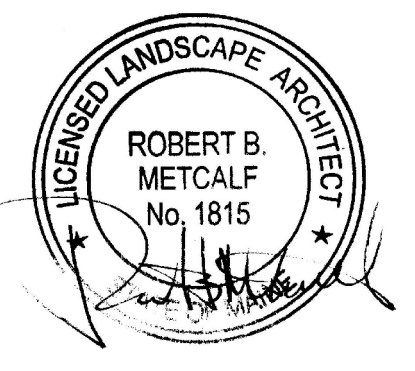


UTILITY NOTES

1. THE UNDERGROUND UTILITIES SHOWN HAVE BEEN LOCATED FROM FIELD SURVEY INFORMATION AND EXISTING DRAWINGS. THE SURVEYOR MAKES NO GUARANTEES THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. THE SURVEYOR FURTHER DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES. CALL DIGSAFE (1-888-344-7233) AT LEAST THREE BUSINESS DAYS BEFORE PERFORMING ANY CONSTRUCTION.
2. DO NOT SCALE THESE DRAWINGS. ANY DISCREPANCIES BETWEEN DRAWINGS, DETAILS, NOTES AND SPECIFICATIONS SHALL BE IMMEDIATELY REPORTED TO THE LANDSCAPE ARCHITECT FOR FURTHER DIRECTION AND RESOLUTION BEFORE ADDITIONAL WORK PROCEEDS.
3. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND GRADES ON THE GROUND. ANY DISCREPANCIES SHALL BE REPORTED IMMEDIATELY TO THE LANDSCAPE ARCHITECT FOR DIRECTION AND RESOLUTION PRIOR TO ANY FURTHER WORK.
4. CONTRACTOR SHALL FIELD VERIFY LOCATION AND DEPTH OF ALL EXISTING UTILITIES WITH THE APPROPRIATE UTILITY COMPANIES PRIOR TO EXCAVATION OF OR INSTALLATION OF ANY PART OF THIS WORK.
5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS. UTILITIES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE STANDARDS OF THE CITY OF PORTLAND AND AFFECTED UTILITY OWNERS. ALL UTILITIES SHALL BE INSTALLED IN CONFORMANCE WITH INDIVIDUAL UTILITY DISTRICT REQUIREMENTS. CONTRACTOR SHALL COORDINATE INSTALLATION WITH APPROPRIATE UTILITY DISTRICT BEFORE INSTALLATION.
6. LOCATION OF UTILITY STRUCTURES AND INVERTS OF PIPED UTILITIES MAY BE ADJUSTED TO MEET FIELD CONDITIONS ONLY AFTER PRIOR APPROVAL OF THE OWNER, THE AFFECTED UTILITY COMPANY, AND THE CITY OF PORTLAND.
7. CONTRACTOR SHALL CONDUCT TEST PIT EXCAVATION TO CONFIRM LOCATION OF EXISTING UTILITIES WHERE NEW BUILDING SANITARY SERVICE, GAS, WATER AND ELECTRIC SERVICE ARE PROPOSED AND WHERE STORMWATER OUTLETS INTO EXISTING STORM DRAIN.
8. WHERE STORM DRAINS HAVE LESS THAN FOUR (4) FEET OF COVER BETWEEN THE TOP OF PIPE AND FINISH GRADE, INSULATE PIPE USING TWO (2) INCH THICK STYROFOAM INSULATION BOARD OVER AND ALONG SIDES OF THE PIPE. ALL REQUIRED UTILITIES SERVING THE DEVELOPMENT SHALL BE COORDINATED AND CONSTRUCTED TO WITHIN 5 FEET OF THE BUILDINGS, AT A LOCATION COORDINATED WITH THE CONTRACTOR AND THE BUILDING PLANS. ALL REQUIRED CONNECTION FEES SHALL BE PAID BY CONTRACTOR.
9. ALL WATER UTILITY MATERIAL AND INSTALLATION METHODS SHALL CONFORM TO THE STANDARDS OF THE PORTLAND WATER DISTRICT. PORTLAND WATER DISTRICT CONTACT: JAMIE PASCHAL (207) 774-5961 x3051.
10. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF OVERHEAD AND UNDERGROUND TELEPHONE AND CABLE UTILITIES. CONTRACTOR SHALL BE RESPONSIBLE FOR CONDUITS. COORDINATE WITH FAIRPOINT COMMUNICATIONS, CONTACT: JOHN CAPRIO (207) 797-1678 AND TIME WARNER CABLE CONTACT: MARK PELLETIER (207) 253-2324.
11. DISCONTINUED UTILITY SERVICES INCLUDING SANITARY SEWER SHALL BE PERMANENTLY CAPPED CONFORMING TO CITY OF PORTLAND STANDARDS, CONTRACTOR SHALL COORDINATE WITH PUBLIC SERVICES.
12. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF OVERHEAD AND UNDERGROUND ELECTRIC WITH CENTRAL MAINE POWER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TOTAL INSTALLATION OF THE UNDERGROUND SERVICE INCLUDING, BUT NOT LIMITED TO, ALL TRENCHING, CONDUIT, PRIMARY AND SECONDARY CABLES, TERMINATORS, CONNECTORS, PULL WIRES, SPARE CONDUIT, ETC. CENTRAL MAINE POWER CONTACT: JAMIE COUGH, (207) 842-2367.
13. SANITARY SEWER PIPE SHALL BE POLYVINYL CHLORIDE PIPE MEETING THE REQUIREMENTS OF SDR-35 FOR GRAVITY PIPE, UNLESS OTHERWISE NOTED ON THE PLANS. ALL SEWER UTILITY MATERIALS AND INSTALLATION METHODS SHALL CONFORM TO STANDARDS OF THE CITY OF PORTLAND. COORDINATE WITH DEPARTMENT OF PUBLIC SERVICES. PORTLAND PUBLIC SERVICES CONTACT: DAVID MARGOLIS-PINEO, (207) 874-8850.
14. PIPE LENGTH EQUALS THE CENTER TO CENTER DISTANCES BETWEEN CATCH BASINS AND/OR MANHOLES MINUS ONE-HALF OF THE DIAMETER OF EACH CATCH BASIN OR MANHOLE.
15. ROOF DRAIN CONNECTIONS SHALL BE CONFIRMED WITH FINAL BUILDING PLANS.
16. THRUST BLOCKS OR LOCKING RETAINER GLANDS SHALL BE PLACED ON THE WATER DISTRIBUTION LINES AT ALL BENDS, TEES, FIRE HYDRANTS, VALVES, CHANGES IN DIRECTION, ETC. THE THRUST BLOCKS OR LOCKING RETAINER GLANDS SHALL MEET THE REQUIREMENTS OF THE PORTLAND WATER DISTRICT.
17. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF THE ONSITE NATURAL GAS SUPPLY SYSTEM WITH THE UNTIL THE CONTRACTOR IS RESPONSIBLE FOR EXCAVATION AND BACKFILL OF THE GAS LINE. UNTIL CONTACT: BRIDGET MATHERS, (207) 541-2505.
18. ALL WORK WITHIN THE ROAD RIGHT-OF-WAY AND ALL UTILITIES CONNECTING TO INFRASTRUCTURE WITHIN THE ROAD SHALL MEET CITY OF PORTLAND TECHNICAL MANUAL STANDARDS.
19. INSTALLATION OF NEW OR UPGRADES TO EXISTING SANITARY SEWERS, STORM DRAINS, WATER LINES OR OTHER UTILITIES SHALL MEET THE PROVISIONS OUTLINED IN SECTION 2 AND SECTION 9 OF THE CITY OF PORTLAND TECHNICAL MANUAL.

LEGEND

	EXISTING	PROPOSED
PROPERTY LINE	---	---
GRANITE MONUMENT	□	□
CATCHBASIN	⊙	⊙
MANHOLE	⊙	⊙
HYDRANT	⊕	⊕
UTILITY POLE	⊙	⊙
WATER VALVE	⊕ WV	⊕ SAN
SANITARY SEWER	ES	SAN
STORM DRAIN	ESD	H2O
WATER	EW	UG+T
TELEPHONE	T	UG+T
GAS	EG	GAS
OVERHEAD WIRES	EOHW	OHW
CMP CABLE LINES	E	UG+T
FOUNDATION DRAIN	---	FD
CLEAN OUT	---	C.O.
CURB	---	---
FENCE	X X	---
SIGN	+	---
DECIDUOUS TREE	⊙	⊙
EVERGREEN TREE	⊗	⊗
CONTOUR	-72-	-73-
SPOT ELEVATION	---	+ 74.00
WALL MOUNTED LIGHT	---	---
POLE MOUNTED LIGHT	---	---

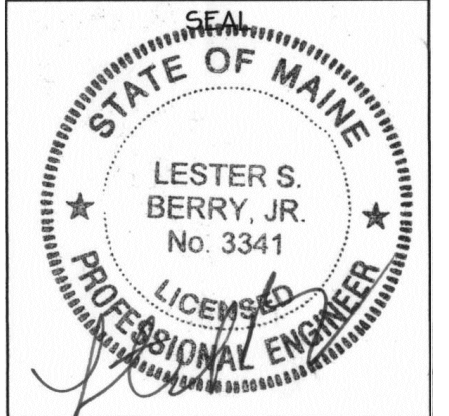

Prepared For:
 Owner:
 Home For The Aged
 777 Stevens Avenue
 Portland, Maine 04103
 Tel.: 207-797-7710

Applicant:
 The Park Danforth
 777 Stevens Avenue
 Portland, Maine 04103
 Tel.: 207-797-7710

Prepared By:
 MITCHELL & ASSOCIATES
 Landscape Architects
 The Staples School
 70 Center Street
 Portland, Maine 04101
 Tel.: 207-774-4427

The Park Danforth
 Portland, Maine
 777 Stevens Avenue


Date: OCTOBER 17, 2014

Issued For: PERMITTING

Revisions:
 NOV. 25, 2014: Per City of Portland Staff Review Comments
 JAN. 5, 2015: Per City of Portland Staff Review Comments
 MAR. 25, 2015: Site Pricing Set

Reproduction or reuse of this document without the expressed written consent of Mitchell & Associates is prohibited. © 2015

Title: UTILITIES PLAN

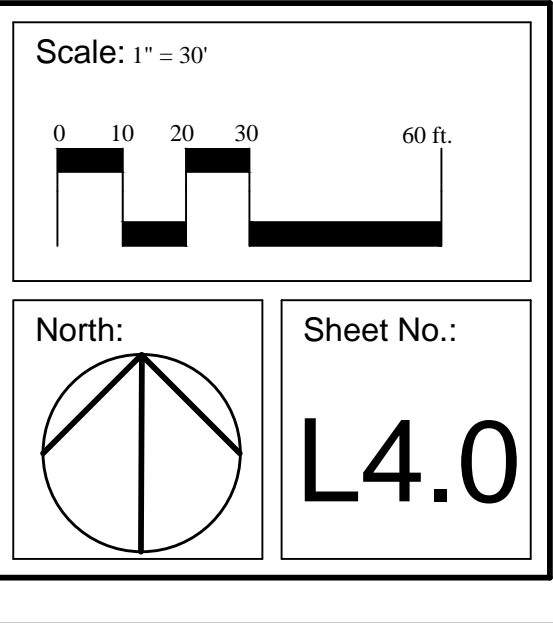

I:\Projects\04103\04103-25_ParkDanforth.mxd, 25/10/15 3:08 PM