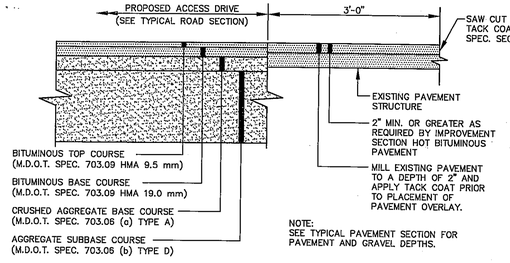

TYPICAL PAVEMENT JOINT
NOT TO SCALE

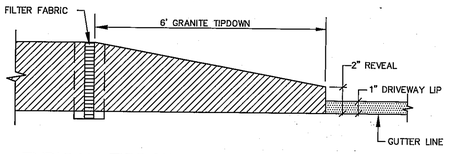

TYPICAL TIPDOWN CURB INSTALLATION
NOT TO SCALE



NOTES:
1. COMPACT GRAVEL SUBBASE AND BASE COURSES TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
2. HOT MIX ASPHALT SHALL BE COMPACTED TO 92% TO 97% OF ITS THEORETICAL MAXIMUM DENSITY AS DETERMINED BY ASTM D-2041.
3. APPLY TACK COAT BETWEEN SUCCESSIVE LIFTS OF BITUMINOUS PAVEMENT.
4. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.

TYPICAL PAVED SECTION
NOT TO SCALE

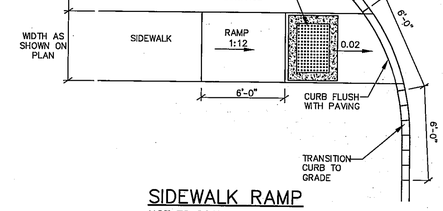

SIDEWALK RAMP
NOT TO SCALE

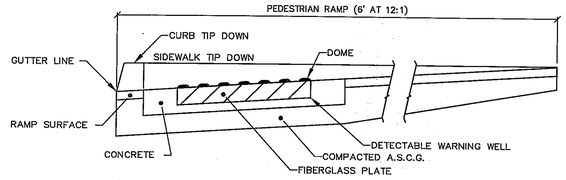

SIDE SECTION VIEW OF
DETECTABLE WARNING, WELL, CURB AND GUTTER

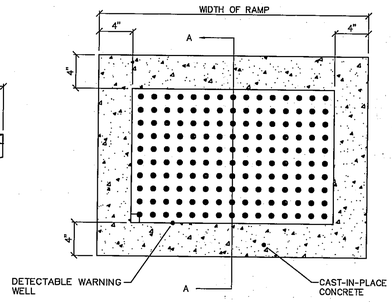

PLAN VIEW OF DETECTABLE WARNING AND WELL

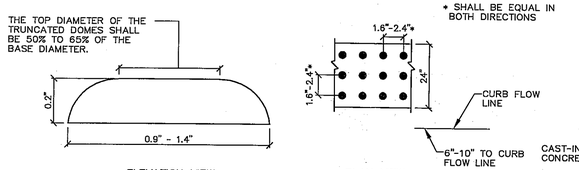

DOME AND DETECTABLE WARNING DETAILS

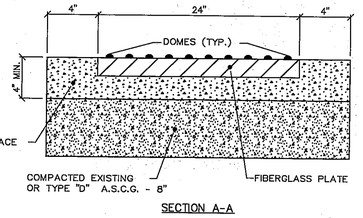

SECTION A-A

DETECTABLE WARNING SURFACE
NOT TO SCALE

NOTE:
ALL DETECTABLE WARNING AREAS SHALL START 6" - 10" FROM THE FLOW LINE OF THE CURB, BE 24" IN DEPTH, AND COVER THE COMPLETE WIDTH OF THE RAMP AREA ONLY.

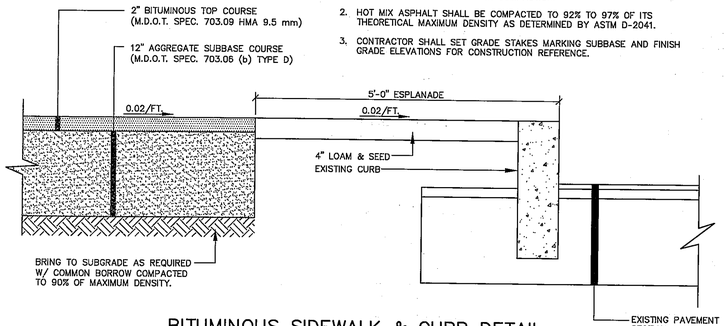

NOTES:
1. COMPACT GRAVEL SUBBASE AND BASE COURSES TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
2. HOT MIX ASPHALT SHALL BE COMPACTED TO 92% TO 97% OF ITS THEORETICAL MAXIMUM DENSITY AS DETERMINED BY ASTM D-2041.
3. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.

BITUMINOUS SIDEWALK & CURB DETAIL
NOT TO SCALE

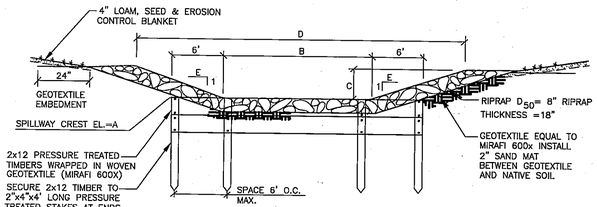

SPILLWAY	A	B	C	D	E
FB-1	73.0	6.0	1.0	12.0	3
GW-1	73.5	6.0	1.0	12.0	3
GW-2	74.6	15.0	1.6	24.6	3

SPILLWAY CROSS-SECTION
NOT TO SCALE

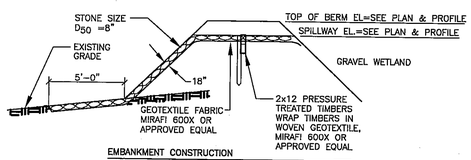

EMBANKMENT CONSTRUCTION
1. CONSTRUCTION OF COMMON BORROW MATERIAL MEETING M.D.O.T. SPECIFICATION.
2. PLACE BORROW MATERIAL IN 12" LIFTS COMPACTED TO 95% OF MAXIMUM DRY DENSITY.
3. INSTALL RIPRAP AND EROSION CONTROL MESH WHERE SPECIFIED ON PLANS
4. LOAM, SEED, AND STABILIZE IN ACCORDANCE WITH SEDIMENTATION AND EROSION CONTROL PLAN.

SPILLWAY SECTION
NTS

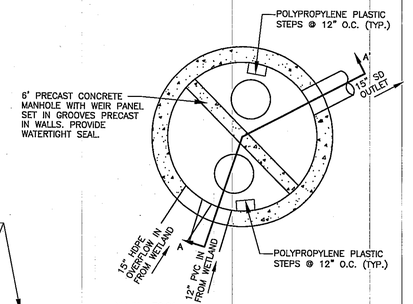

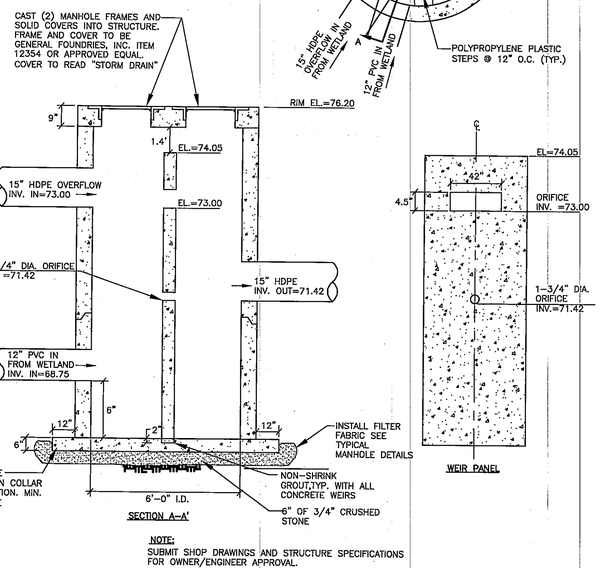

NOTE:
SUBMIT SHOP DRAWINGS AND STRUCTURE SPECIFICATIONS FOR OWNER/ENGINEER APPROVAL.

OUTLET CONTROL STRUCTURE
NOT TO SCALE

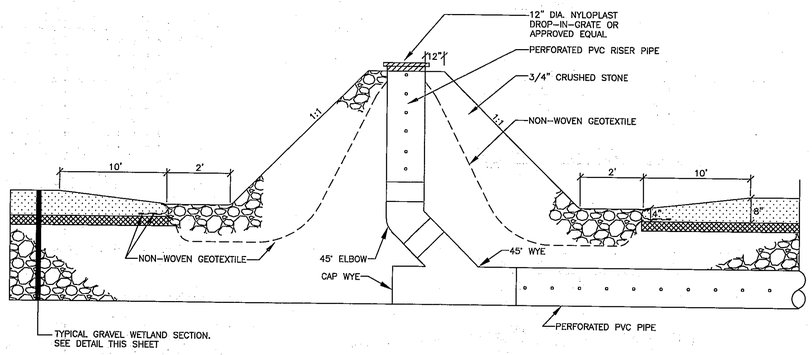

RISER PIPE DETAIL
NOT TO SCALE

OWENS McCULLOUGH, PE 7122

STATE OF MAINE
OWENS A. McCULLOUGH
No. 7122
REGISTERED PROFESSIONAL ENGINEER
Owens A. McCullough 5-7-15

DESIGNED	CHECKED
ACH	OAM

REV.	BY:	DATE:	STATUS:
A	OAM	09-10-15	ISSUED FOR CITY SITE PLAN REVIEW & APPROVAL

THIS PLAN SHALL NOT BE MODIFIED WITHOUT WRITTEN PERMISSION FROM "SEBAGO TECHNICS, INC." ANY ALTERATIONS, AUTHORIZED OR OTHERWISE, SHALL BE AT THE USER'S SOLE RISK AND WITHOUT LIABILITY TO SEBAGO TECHNICS, INC.

SEBAGO TECHNICS, INC.
WWW.SEBAGOTECHNICS.COM
75 John Roberts Rd. — South Portland, ME 04106
250 Goddard Rd. — Lewiston, ME 04240
Tel. 207-200-2100
Tel. 207-783-5566

SITE DETAILS
OF:
SAND & SALT STORAGE FACILITY
CANCO ROAD
PORTLAND, MAINE 04102
FOR:
CITY OF PORTLAND - DEPARTMENT OF PUBLIC SERVICES
55 PORTLAND STREET
PORTLAND, MAINE 04101

PROJECT NO.	SCALE
15056	NTS

SHEET 8 OF 10

15056D.dwg TAB:D3