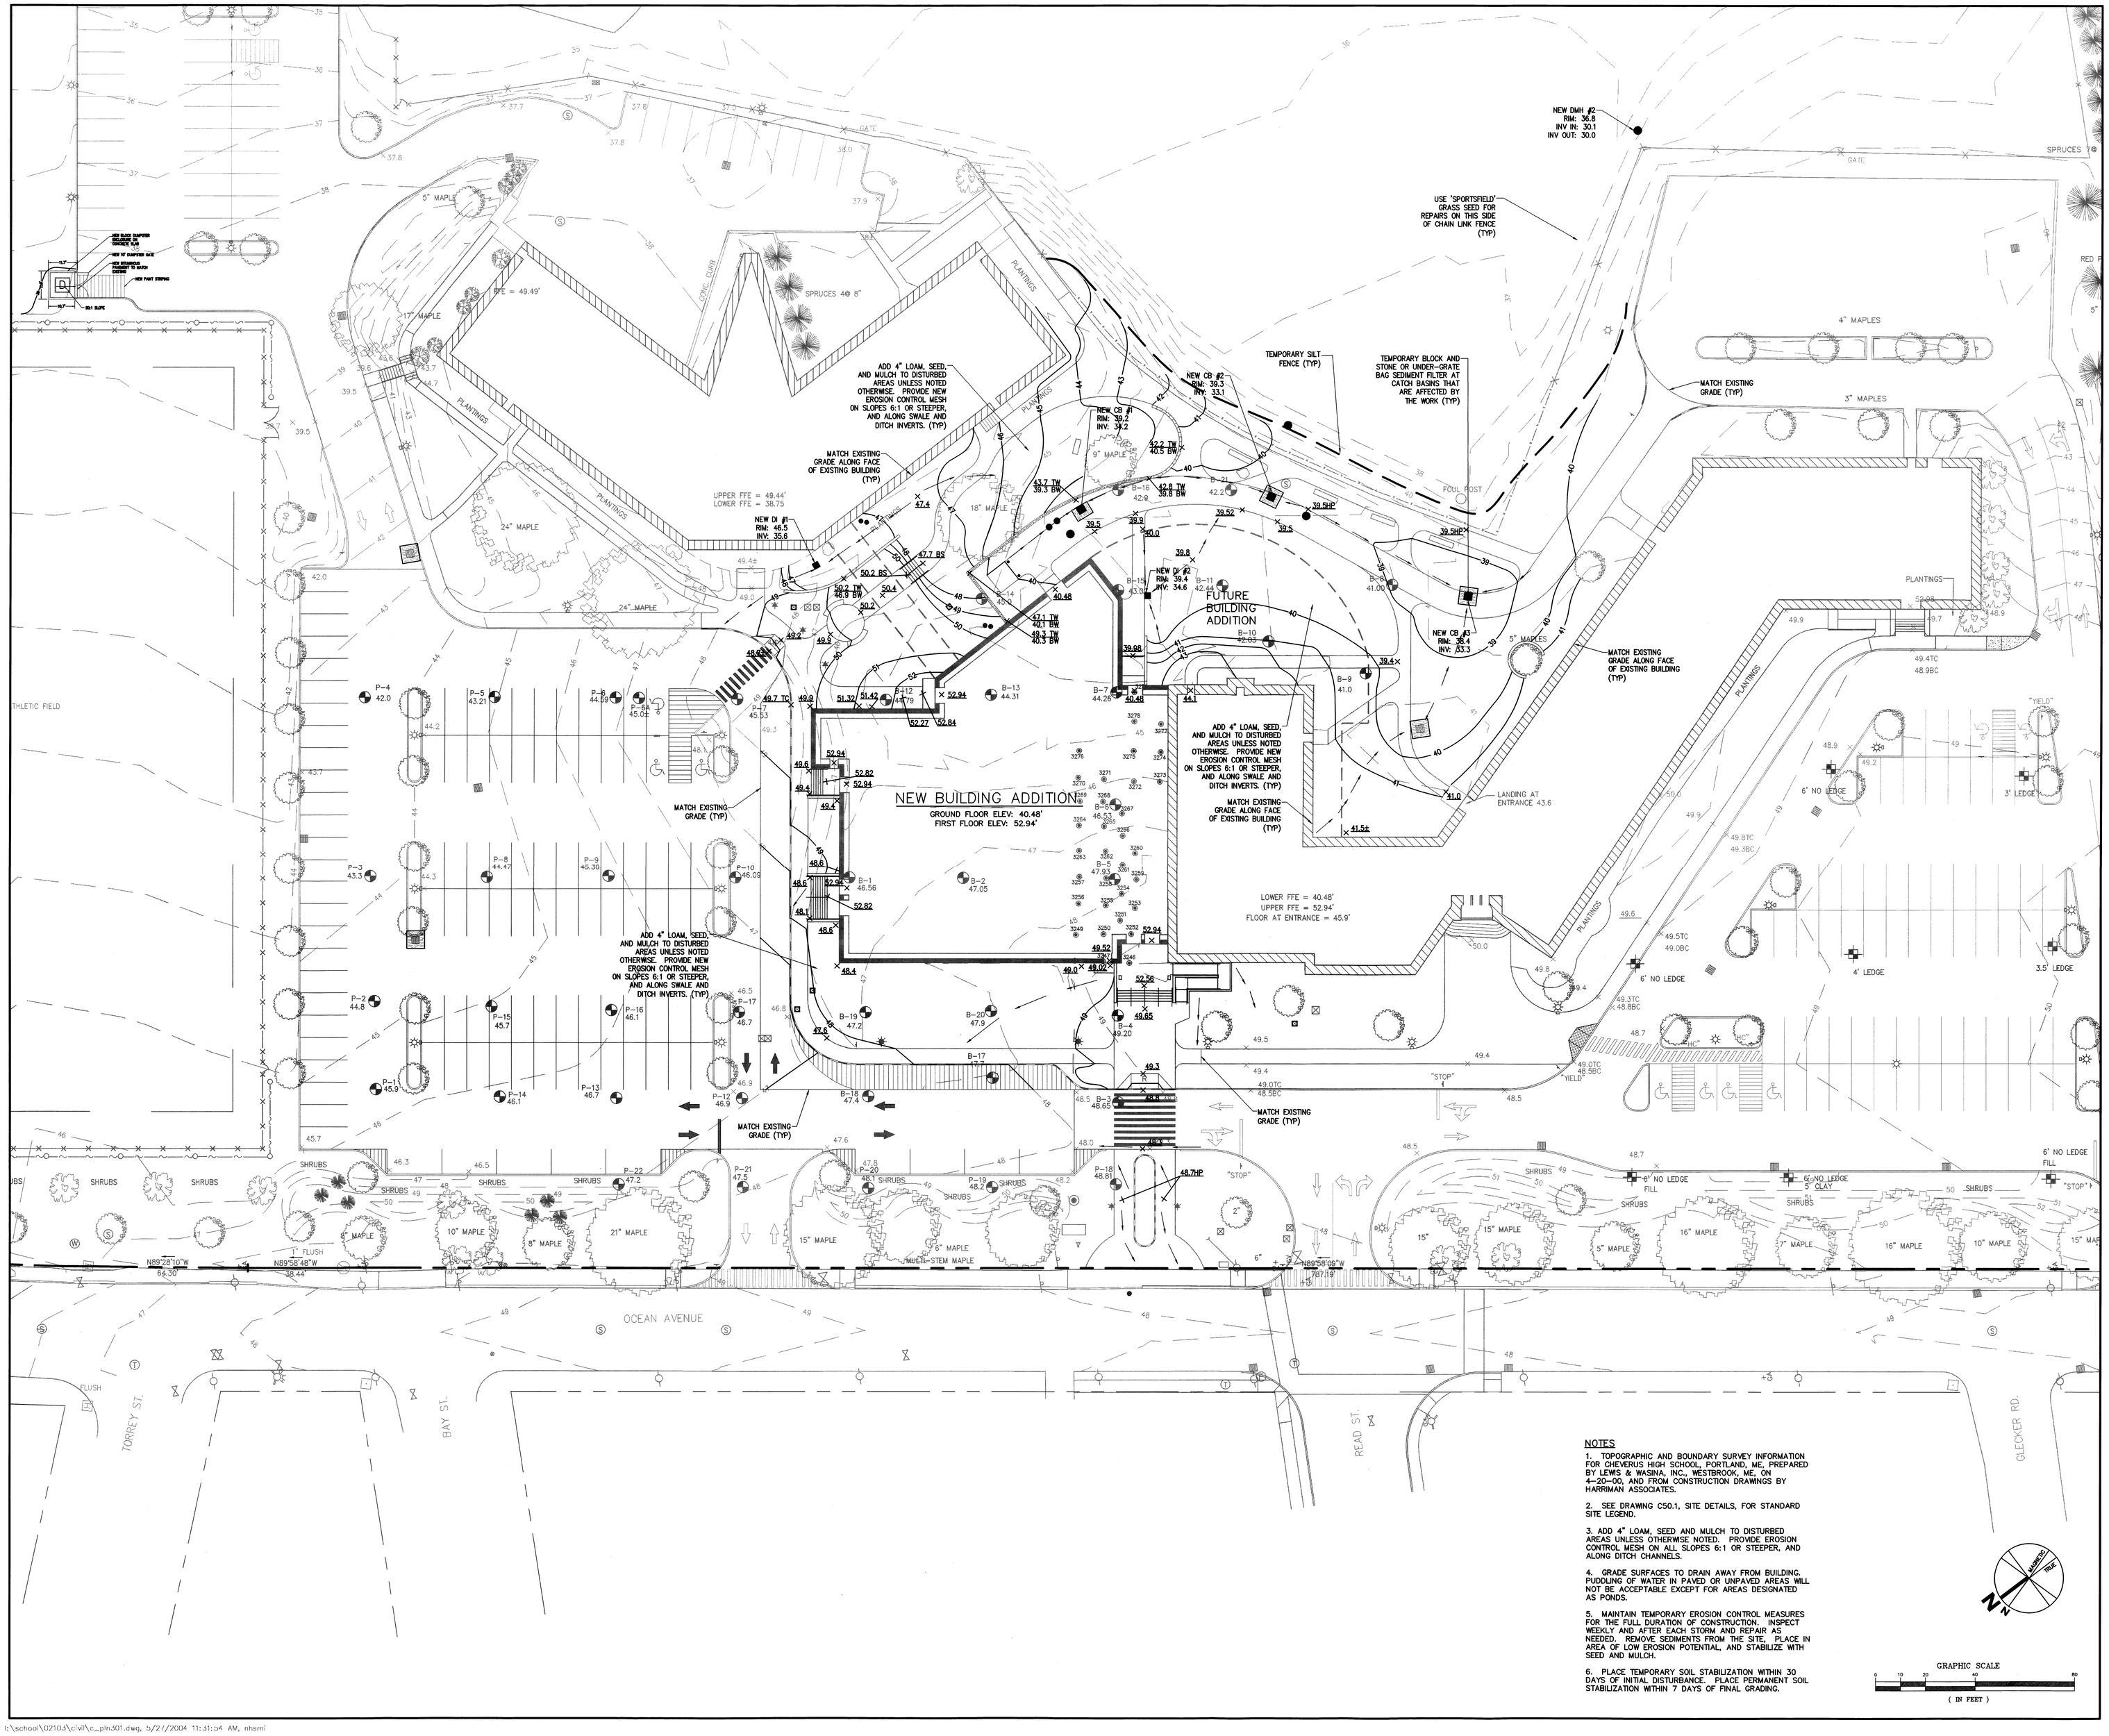

NOTES

1. TOPOGRAPHIC AND BOUNDARY SURVEY INFORMATION FOR CHEVERUS HIGH SCHOOL, PORTLAND, ME, PREPARED BY LEWIS & WASINA, INC., WESTBROOK, ME, ON 4-20-00, AND FROM CONSTRUCTION DRAWINGS BY HARRIMAN ASSOCIATES.

2. SEE DRAWING C50.1, SITE DETAILS, FOR STANDARD SITE LEGEND.

3. ADD 4" LOAM, SEED AND MULCH TO DISTURBED AREAS UNLESS OTHERWISE NOTED. PROVIDE EROSION CONTROL MESH ON ALL SLOPES 6:1 OR STEEPER, AND ALONG DITCH CHANNELS.

4. GRADE SURFACES TO DRAIN AWAY FROM BUILDING. PUDDLING OF WATER IN PAVED OR UNPAVED AREAS WILL NOT BE ACCEPTABLE EXCEPT FOR AREAS DESIGNATED AS PONDS.

5. MAINTAIN TEMPORARY EROSION CONTROL MEASURES FOR THE FULL DURATION OF CONSTRUCTION. INSPECT WEEKLY AND AFTER EACH STORM AND REPAIR AS NEEDED. REMOVE SEDIMENTS FROM THE SITE, PLACE IN AREA OF LOW EROSION POTENTIAL, AND STABILIZE WITH SEED AND MULCH.

6. PLACE TEMPORARY SOIL STABILIZATION WITHIN 30 DAYS OF INITIAL DISTURBANCE. PLACE PERMANENT SOIL STABILIZATION WITHIN 7 DAYS OF FINAL GRADING.

GRAPHIC SCALE
0 10 20 40 80
(IN FEET)

Architects + Engineers
HARRIMAN ASSOCIATES
One Auburn Business Park
Auburn, Me 04210
207.784.5100 tel
207.782.3017 fax
www.harriman.com
Building communities
since 1970
© 2004
STATE OF MAINE
FRANK L. CRABTREE
3993
REGISTERED PROFESSIONAL ENGINEER

Project Title

CHEVERUS HIGH SCHOOL PHASE 3–ADDITIONS & RENOVATIONS

PORTLAND, ME

HA Project No.	02103

Key Plan

Mark	Date	Description
	05-28-04	ISSUED FOR BID
	05-17-04	OWNER REVIEW
	02-27-04	D.D. REVIEW
	08-29-03	PLANNING BOARD

Issue Dates

Drawing Status

Drawing Title

SITE GRADING AND EROSION CONTROL PLAN

PA / PE: FLC	Drawn By: MRL/NHS

Drawing Number

C30.1