




Mark	Date	Description
03-28-14	ISSUED FOR BID	
05-17-14	OWNER REVIEW	

Drawing Status	
----------------	--

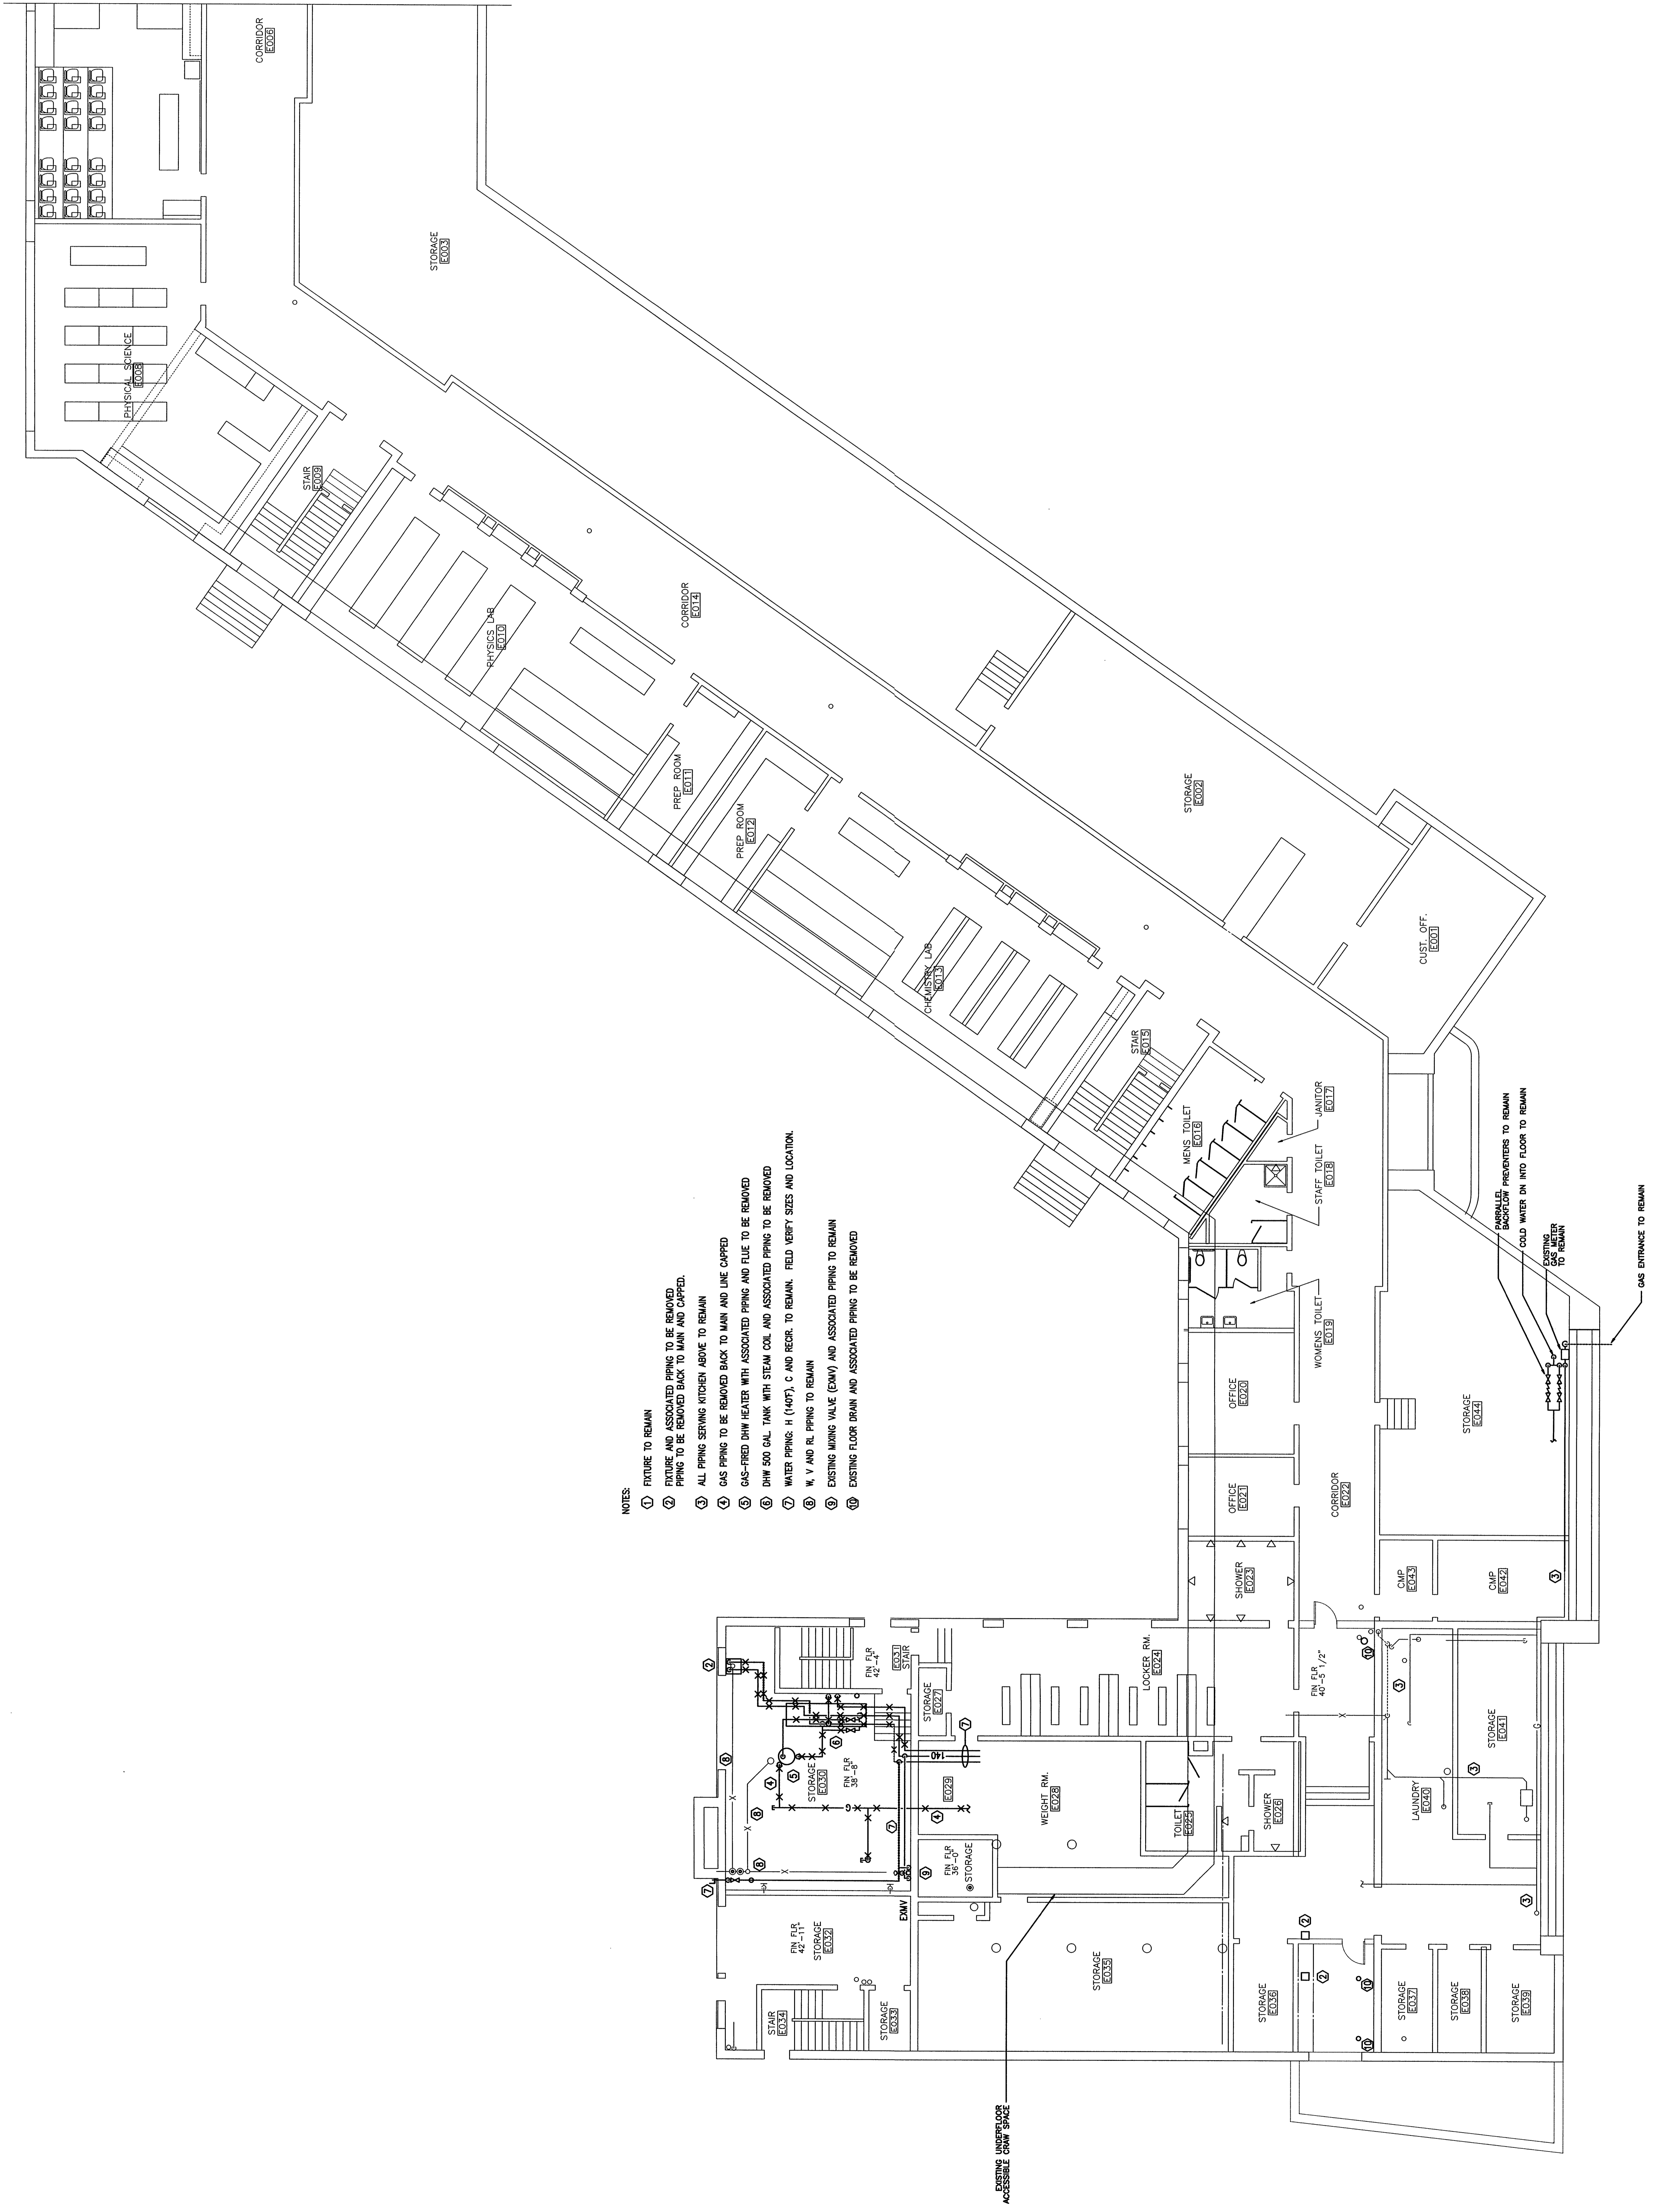

- NOTES:
- 1 FUTURE TO REMAIN
 - 2 FIXTURE AND ASSOCIATED PIPING TO BE REMOVED. PIPING TO BE REINSTALLED TO MAIN AND CAPPED.
 - 3 ALL PIPING SERVING KITCHEN ABOVE TO REMAIN
 - 4 GAS PIPING TO BE REMOVED BACK TO MAIN AND LINE CAPPED
 - 5 GAS-PROD. DRY HEATER WITH ASSOCIATED PIPING AND FLEX TO BE REMOVED
 - 6 DHW 500 GAL. TANK WITH STEAM COIL AND ASSOCIATED PIPING TO BE REMOVED
 - 7 WATER PIPING: H (HOT), C AND REGR. TO REMAIN. FIELD VERIFY SIZES AND LOCATION.
 - 8 W, V AND RL PIPING TO REMAIN
 - 9 EXISTING MANG VALVE (EMV) AND ASSOCIATED PIPING TO REMAIN
 - 10 EXISTING FLOOR DRAIN AND ASSOCIATED PIPING TO BE REMOVED

GROUND FLOOR PLUMBING DEMOLITION PLAN
 SCALE: 1/8" = 1'-0"