


bil-jax™
A Member of the plettac Group

125 Taylor Parkway Archbold, OH 43502-9309 Ph: (419) 445-8815 or (800) 537-0540 Fax: (419) 445-0367, www.biljax.com

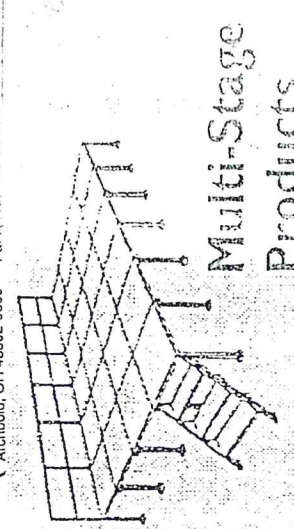

Multi-Stage Products

Sizes available for the Multi-Stage decks include the popular 4' square section, a 2' x 4' section and a 45° corner section. Standard decks include a 3/4" AC exterior plywood stained in gray enclosed in a steel frame edge protector. Other deck options are available.


**CAPACITY 150 PSF
(732kg per sq. meter)**

Standard on all decks is the original cam lock feature which firmly fastens stage sections together from the top of the stage platform. Cam lock holes are neatly plugged with a cap to fill the surface.



STAIR OPTIONS

Stage adjustable stair packages come complete with stair step stringers, stair stringer extensions, hand rail aluminum stair planks. These stair packages offer easy access to the stage platform area and can stand to fit various stage heights within the package range.



The new Ultra-Stair decreases set up time and labor. Multiple units are available for platform heights from 24". The units, with detachable handrails, fold flat for storage and ease in shipment.

Package Sizes Available:

12'-18"	Stage Ht. Pkg.
2'-3'	Stage Ht. Pkg.
3'-4'	Stage Ht. Pkg.
4'-6'	Stage Ht. Pkg.

