


**GRADING NOTES**

- ALL WALKWAYS, PEDESTRIAN AREAS AND ACCESSIBLE PARKING AISLES SHALL CONFORM WITH THE APPROPRIATE ADA GUIDELINES. GRADING SHALL BE AS FOLLOWS:
- 1.1. WALKWAYS SHALL HAVE A MAXIMUM CROSS SLOPE (PERPENDICULAR TO THE DIRECTION OF TRAVEL) OF 2% AND A MAXIMUM LONGITUDINAL SLOPE (ALONG THE DIRECTION OF TRAVEL) OF 5%.
  - 1.2. CURB RAMP MAY HAVE A RUNNING SLOPE OF UP TO 8% (1" PER FOOT) HOWEVER, THE MAXIMUM CROSS SLOPE IS STILL 2%.
  - 1.3. LANDING AREAS, PATIO AREAS AND AREAS WHERE PEDESTRIANS ARE TURNING SHALL HAVE A MAXIMUM SLOPE OF 2% IN ALL DIRECTIONS.
  - 1.6. ALL SIDEWALKS SHALL HAVE A MAXIMUM CROSS SLOPE OF SIDEWALK SHALL BE A 2%. PARTICULAR ATTENTION SHALL BE PAID TO DRIVEWAYS.
  - 1.7. IF THE CONTRACTOR DETERMINES THAT ANY OF THE ABOVE STANDARDS ARE NOT COMPATIBLE WITH SITE CONDITIONS THEY SHALL CONTACT THE ENGINEER/OWNER UPON DISCOVERY AND REQUEST GUIDANCE. JOHN MAHONEY: 207-831-6165
  - 1.8. ANY WORK DONE OUTSIDE OF THESE GUIDELINES (WITHOUT FIRST REQUESTING GUIDANCE FROM THE ENGINEER) SHALL BE REMOVED AND REPLACED AT NO ADDITIONAL COST TO THE OWNER.

Project:  
**MONTE'S FINE FOODS**  
 788 WASHINGTON AVENUE  
 PORTLAND, MAINE  
 Applicant:  
 Quattrucci & Rouda, LLC  
 109 Sheridan Street  
 Portland, Maine 04101  
 207-939-5616  
 stevequattrucci@gmail.com

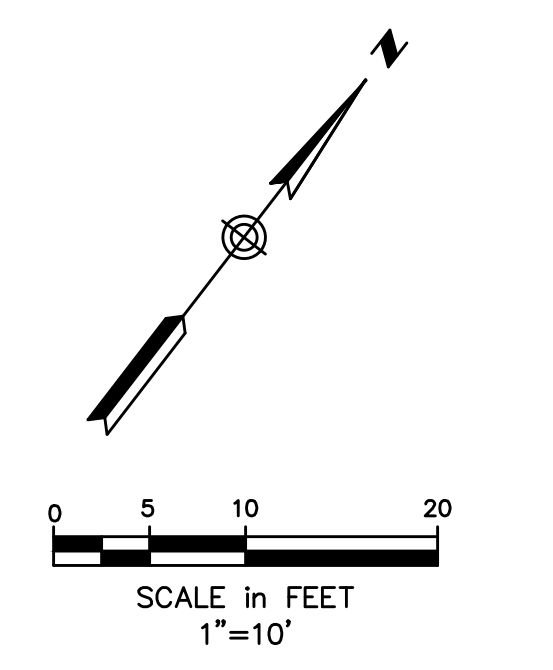

Civil Engineer  
 Ransom Consulting, Inc.  
 400 Commercial Street, Suite 404  
 Portland, Maine 04101  
 207-772-2891



**STORMWATER, GRADING, & EROSION CONTROL PLAN**

No.	Revision/Issue	Date
D	BUILDING PERMIT	8-7-18
C	BUILDING PERMIT	7-17-18
B	PERMITTING	6-8-18
A	PROGRESS PRINT	5-14-18

Design by:	JIM	Checked by:	SJB
Drawn by:	JIM	Approved by:	SJB

Project:  
181.06031

Sheet No:

**C2**

**FOR PERMITTING**

P:\2018\181.06031\_Monte's\Drawings\Working\Drawings\181-06031\_Monte's\_Ransom\_Plan\_Seg C-2\_Aug 07,2018- 4:52pm