

MORE ENERGY. FOR LIFE™



• 20.4% efficiency


Ideal for roofs where space is at a premium or where future expansion might be needed.

High performance

Delivers excellent performance in real world conditions, such as high temperatures, clouds and low light. 1, 2, 3

• Proven value

Designed for residential rooftops, E-Series panels deliver the features, value and performance for any home.



Maxeon® Solar Cells: Fundamentally better.

Engineered for performance, designed for durability.

Engineered for peace of mind

Designed to deliver consistent, trouble-free energy over a very long lifetime.^{4,5}

Designed for durability

The SunPower® Maxeon Solar Cell is the only cell built on a solid copper foundation. Virtually impervious to the corrosion and cracking that degrade Conventional Panels.^{4,5}

#1 Ranked in Fraunhofer durability test. ¹⁰ **100% power** maintained in Atlas 25⁺ comprehensive PVDI Durability test. ¹¹

HIGH PERFORMANCE & EXCELLENT DURABILITY





E20 - 327 PANEL

HIGH EFFICIENCY®


Generate more energy per square foot


E-Series residential panels convert more sunlight to electricity producing 36% more power per panel, 1 and 60% more energy per square foot over 25 years. 3,4

HIGH ENERGY PRODUCTION 7

Produce more energy per rated watt

High year one performance delivers 7-9% more energy per rated watt.³ This advantage increases over time, producing 20% more energy over the first 25 years to meet your needs.⁴

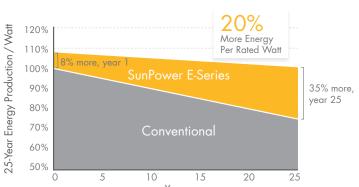






MORE ENERGY. FOR LIFE™

SUNPOWER OFFERS THE BEST COMBINED POWER AND PRODUCT WARRANTY




More guaranteed power: 95% for first 5 years, -0.4%/yr. to year 25.8

ELEC	TRICAL DATA	
	E20-327	E19-320
Nominal Power ¹² (Pnom)	327 W	320 W
Power Tolerance	+5/-0%	+5/-0%
Avg. Panel Efficiency ¹³	20.4%	19.9%
Rated Voltage (Vmpp)	54.7 V	54.7 V
Rated Current (Impp)	5.98 A	5.86 A
Open-Circuit Voltage (Voc)	64.9 V	64.8 V
Short-Circuit Current (Isc)	6.46 A	6.24 A
Maximum System Voltage	600 V UL & 1000 V IEC	
Maximum Series Fuse	20 A	
Power Temp Coef. (Pmpp)	-0.38% / °C	
Voltage Temp Coef. (Voc)	−176.6 mV / °C	
Current Temp Coef. (Isc)	3.5 mA / °C	

REFERENCES:


- 1 All comparisons are SPR-E20-327 vs. a representative conventional panel: 240W, approx. $1.6\ m^2$, 15% efficiency.
- 2 PVEvolution Labs "SunPower Shading Study," Feb 2013.
- 3 Typically 7-9% more energy per watt, BEW/DNV Engineering "SunPower Yield Report," Jan 2013.
- 4 SunPower 0.25%/yr degradation vs. 1.0%/yr conv. panel. Campeau, Z. et al. "SunPower Module Degradation Rate," SunPower white paper, Feb 2013; Jordan, Dirk "SunPower Test Report," NREL, Oct 2012.
- 5 "SunPower Module 40-Year Useful Life" SunPower white paper, Feb 2013. Useful life is 99 out of 100 panels operating at more than 70% of rated power.
- 6 Out of all 2600 panels listed in Photon International, Feb 2012.
- 7 8% more energy than the average of the top 10 panel companies tested in 2012 (151 panels, 102 companies), Photon International, March 2013.
- 8 Compared with the top 15 manufacturers. SunPower Warranty Review, Feb 2013.
- 9 Some exclusions apply. See warranty for details.
- 10 5 of top 8 panel manufacturers were tested by Fraunhofer ISE, "PV Module Durability Initiative Public Report," Feb 2013.
- 11 Compared with the non-stress-tested control panel. Atlas 25+ Durability test report, Feb 2013.
- 12 Standard Test Conditions (1000 W/m² irradiance, AM 1.5, 25° C).
- 13 Based on average of measured power values during production.



Combined Power and Product Defect 25 year coverage that includes panel replacement costs. 9

OPERATIN	IG CONDITION AND MECHANICAL DATA
Temperature	- 40°F to +185°F (- 40°C to +85°C)
Max load	Wind: 50 psf, 2400 Pa, 245 kg/m² front & back Snow: 112 psf, 5400 Pa, 550kg/m² front
lmpact resistance	1 inch (25 mm) diameter hail at 52 mph (23 m/s)
Appearance	Class A
Solar Cells	96 Monocrystalline Maxeon Gen II Cells
Tempered Glass	High Transmission Tempered Anti-Reflective
Junction Box	IP-65 Rated
Connectors	MC4 Compatible
Frame	Class 1 black anodized, highest AAMA Rating
Weight	41 lbs (18.6 kg)

	TESTS AND CERTIFICATIONS
Standard tests	UL 1703, IEC 61215, IEC 61730
Quality tests	ISO 9001:2008, ISO 14001:2004
EHS Compliance	RoHS, OHSAS 18001:2007, lead-free, PV Cycle
Ammonia test	IEC 62716
Salt Spray test	IEC 61701 (passed maximum severity)
PID test	Potential-Induced Degradation free: 1000V 10
Available listings	CEC, JET, KEMCO, MCS, FSEC, CSA, UL, TUV



See http://www.sunpowercorp.com/facts for more reference information.

For further details, see supplementary specs: www.sunpowercorp.com/datasheets. Read safety and installation instructions before using this product.