

NEW ENERGY STAR WINDOW:
 NEW CONSTRUCTION VINYL DOUBLE HUNG
 U-FACTOR 0.30
 SHGC 0.31
 VISIBLE LIGHT TRANSMITTANCE 0.55

NEW ENERGY STAR ENTRY DOOR:
 NEW CONSTRUCTION CLAD FULL LITE DOOR
 U-FACTOR 0.28
 SHGC 0.32
 VISIBLE LIGHT TRANSMITTANCE 0.54


NEW ROOF BUILD-UP:
 FLINTLASTIC SELF ADHEARING ROOF MEMBRANE
 5/8" CDX ROOF SHEATHING
 2X8 RAFTERS @ 16" O.C.
 6" ccSPF INSULATION R-42

NEW EXTERIOR WALLS:
 SAME AS DORMER

NEW FLOOR BUILD-UP:
 CERAMIC TILE FLOORING
 1/2" CEMENT BOARD
 3/4" T&G ADVANTECH
 2X8 JOISTS @ 16" O.C.
 6" ccSPF INSULATION R-42
 1-1/2" XPS RIDGD UNDER FRAMING
 5/8" T&G ADVANTECH ATOP RIGID

EXISTING FIRST FLOOR
 FLUSH WITH NEW MUDROOM FLOOR

SECTION - ELEVATION A-A'

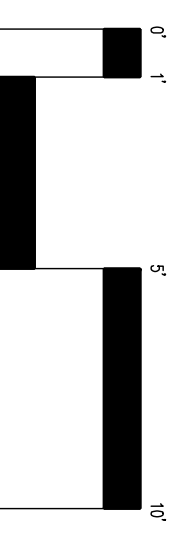

title
**FIRST FLOOR
 MUDROOM
 SECTION A-A'**

BY RW
 DATE 08.24.15
 SCALE 1/4"=1'-0"

HILLIS STREET RESIDENCE
 PORTLAND, MAINE

187 anderson street
 portland - maine - 04101
 t.207.776.2287
 www.portlandrenovations.com



A4.0