


- EXISTING ROOF TO BE REMOVED
- NEW ROOF BUILD-UP:
 - FLINTLASTIC SELF ADHERING ROOF MEMBRANE
 - 5/8" CDX ROOF SHEATHING
 - 2X8 RAFTERS @ 16" O.C.
 - 6" ccspf INSULATION R-42
- NEW EXTERIOR WALLS:
 - VINYL SIDING TO MATCH EXISTING
 - 1/2" CDX SHEATHING
 - 2X6 @ 16" O.C.
 - 2X8 INSULATED BOX HEADER
 - 3" ccspf INSULATION R-21
 - BEDROOM CLOSET WALL SHOWN BEYOND EXISTING HALLWAY WALLS
- NEW ENERGY STAR WINDOWS:
 - NEW CONSTRUCTION VINYL DOUBLE HUNG
 - U-FACTOR 0.30
 - SHGC 0.31
 - VISIBLE LIGHT TRANSMITTANCE 0.55

SECTION G-G'

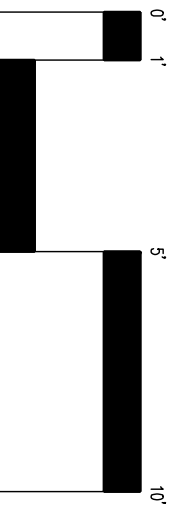

A8.0

BY: RW
 DATE: 08.24.15
 SCALE: 1/4"=1'-0"

TITLE
**SECOND FLOOR
 SECTION G-G'**

HILLIS STREET RESIDENCE
 PORTLAND, MAINE

187 anderson street
 portland - maine - 04101
 t.207.776.2287
 www.portlandrenovations.com

