

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 282-284 Stevens Ave		Owner: John & Sarah Lufkin		Phone: 828-4337 828-4859	Permit No: 980525
Owner Address: 75 Four Winds Rd Portland, ME 04102		Lessee/Buyer's Name:		Phone:	BusinessName:
Contractor Name: B&C Inc.		Address: 223A Cumberland Ave Portland, ME 04101		Phone: 773-1527	
Past Use: Residential	Proposed Use: Same	COST OF WORK: \$ 2,500.00		PERMIT FEE: \$ 35.00	
Proposed Project Description: Repair/Replace as needed elements of front porches		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group 17 Type 50B Signature: [Signature]	
		Signature:		Signature:	
Permit Taken By:		Date Applied For: 14 May 1998			

PERMIT ISSUED
MAY 20 1998
CITY OF PORTLAND

Zone: CBL: 176-B-004
Zoning Approval:
Special Zone or Reviews:
 Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal
 Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation
 Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:
 Approved
 Approved with Conditions
 Denied

Date: _____

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

14 May 1998

SIGNATURE OF APPLICANT _____ ADDRESS: _____ DATE: _____ PHONE: _____

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ PHONE: _____

CEO DISTRICT

COMMENTS

6/30/98 Front Porch + deck was replaced
on porch + railings + balusters
OK completed now

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

BUILDING PERMIT REPORT

DATE: 15 MAY 98 ADDRESS: 282-284 - (176-H-004)
REASON FOR PERMIT: Repair & replace porches
BUILDING OWNER: John & Sarah Lufkin
CONTRACTOR: BRC Inc.
PERMIT APPLICANT: _____
USE GROUP R-3 BOCA 1996 CONSTRUCTION TYPE 513

CONDITION(S) OF APPROVAL

This Permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: *1, *2, *8, *10, *29, *30

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approval from the ~~Development Review Coordinator~~ and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3. Precaution must be taken to protect concrete from freezing.
4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
7. Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42" , except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".
9. Headroom in habitable space is a minimum of 7'6".
10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
14. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)
15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
16. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):


- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
19. The Sprinkler System shall maintained to NFPA #13 Standard.
20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
25. All requirements must be met before a final Certificate of Occupancy is issued.
26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
28. Please read and implement the attached Land Use-Zoning report requirements.

*29. This permit authorize the replacement & repair only of the existing porches - NO increase in the footprint of the original porches is authorized.

31. _____
32. _____


 P. Samuel Hoffses, Code Enforcement

cc: Lt. McDougall, PFD
 Marge Schmuckal

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

**Building or Use Permit Application
Attached Single Family Dwellings/Two-Family Dwelling
Multi-Family or Commercial Structures and Additions Thereto**

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTEIf you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.**

Location/Address of Construction: 282/284 Stevens Ave.		
Total Square Footage of Proposed Structure: 250 s.f.	Square Footage of Lot: 6498	
Tax Assessor's Chart, Block & Lot Number Chart# 176 Block# H Lot# 4	Owner: John N + Sarah J. Luffin	Telephone#: 828-4559
Owner's Address: 75 Four Winds Rd. Portland ME 04102	Lessee/Buyer's Name (If Applicable)	Cost Of Work: \$ 2500.00
Proposed Project Description:(Please be as specific as possible) Repair/replace as needed elements of front porches		
Contractor's Name, Address & Telephone BRC INC 223A Cumberland Ave Portland ME 04101 773-1527 Ca 11		
Current Use: Deck Residential	Proposed Use: Deck Residential	

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

- All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II.
- All plumbing must be conducted in compliance with the State of Maine Plumbing Code.
- All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.
- HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.

You must Include the following with you application:

- 1) A Copy of Your Deed or Purchase and Sale Agreement
- 2) A Copy of your Construction Contract, if available
- 3) A Plot Plan/Site Plan

*faxed OK 5/14/98
fee: \$35.00*


Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional.

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.




Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant: <i>[Signature]</i>	Date: 5/12/98
--	---------------

Building/Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.
Additional Site review and related fees are attached on a separate addendum

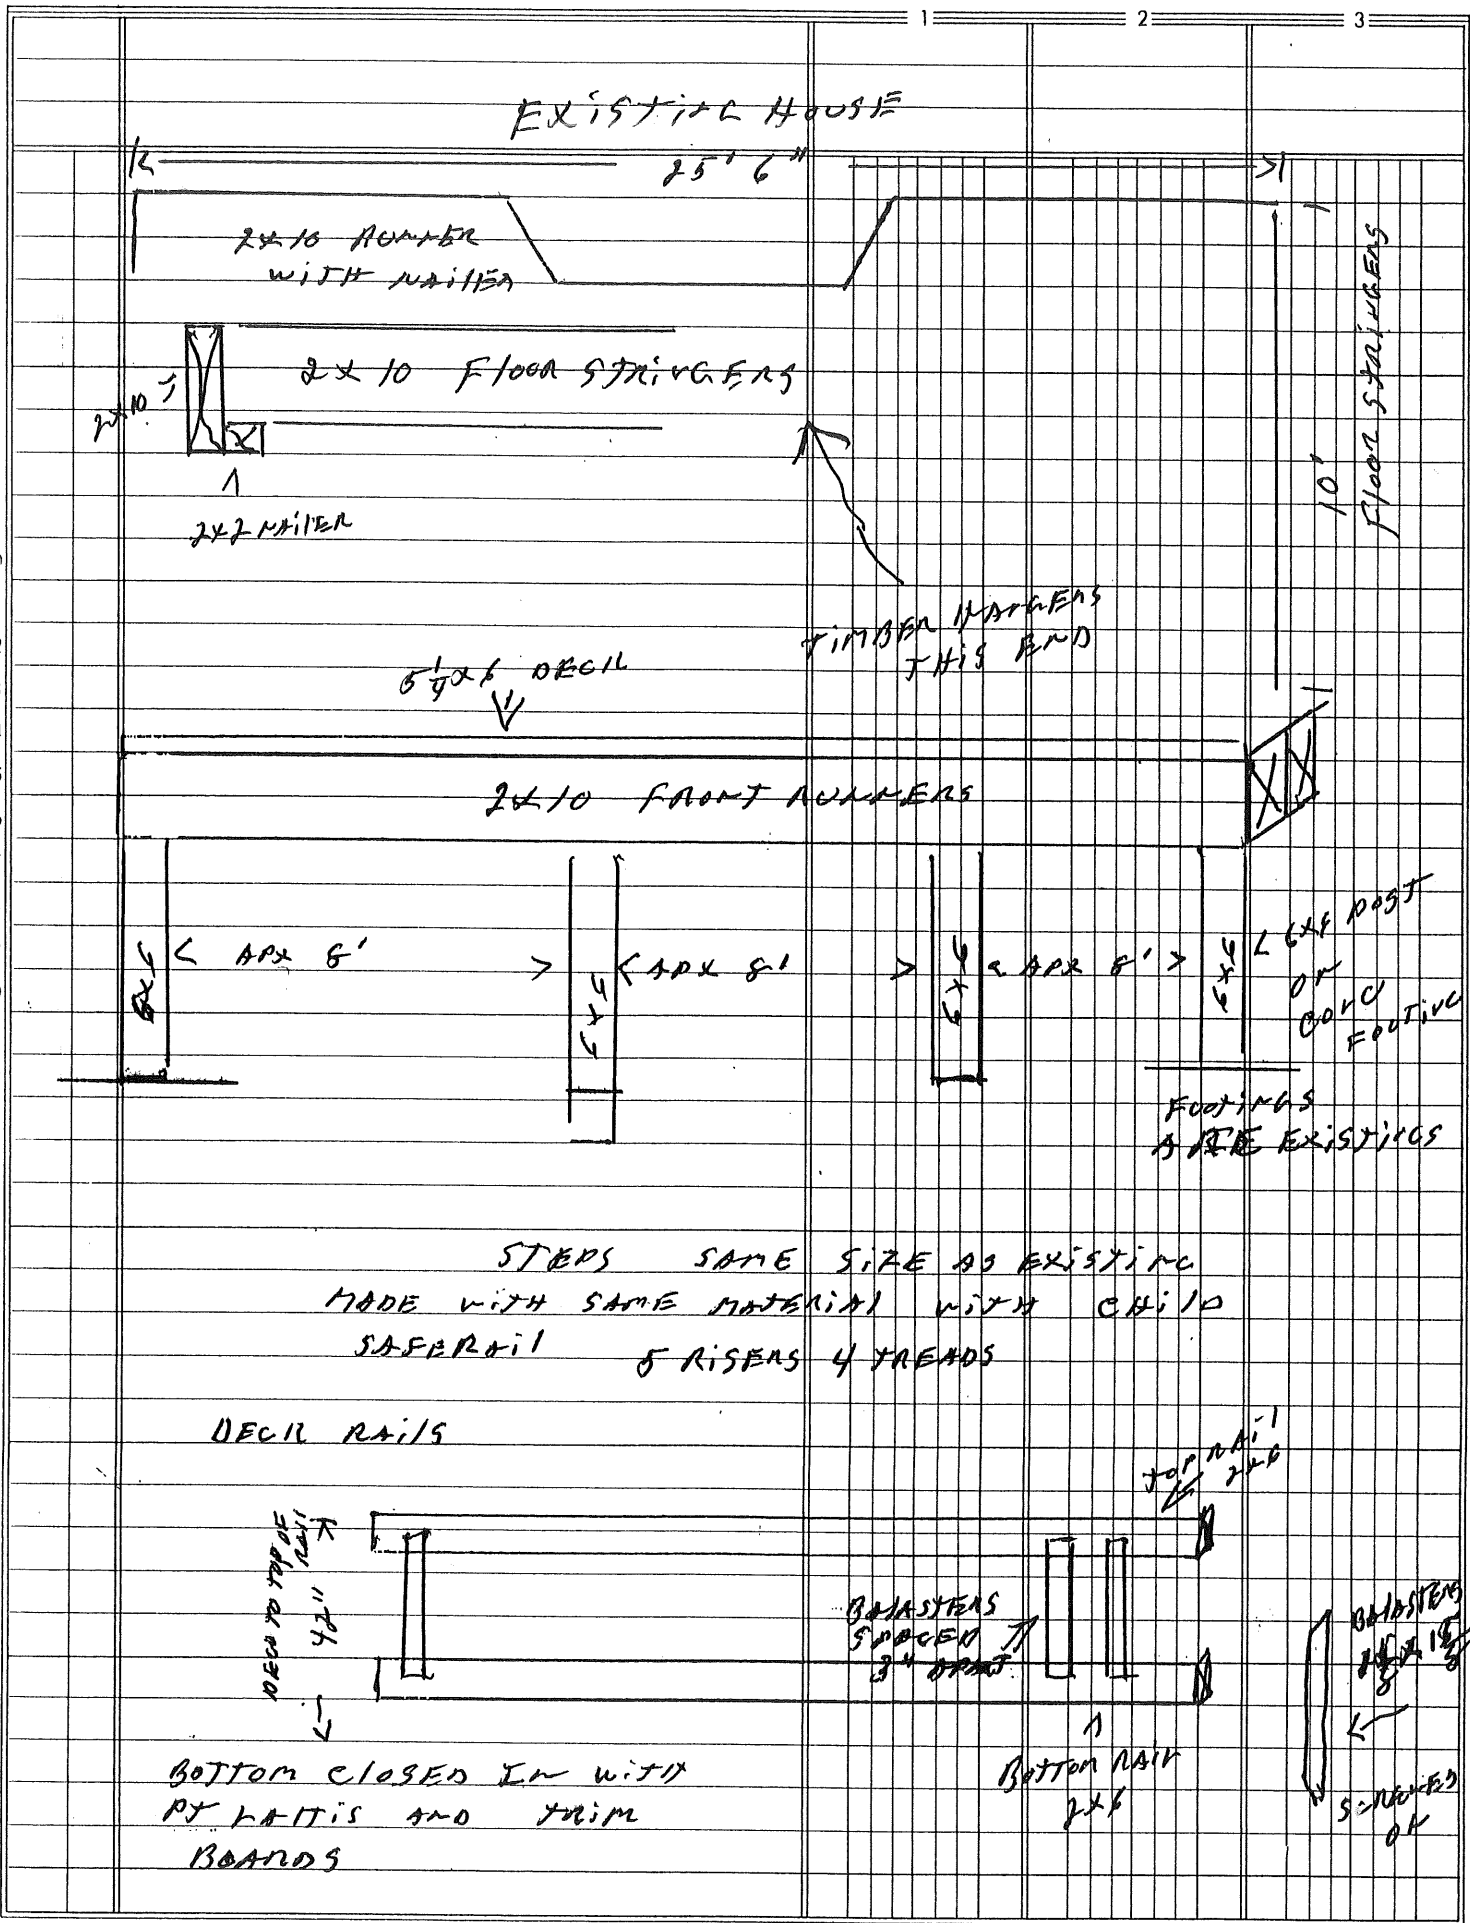

EXISTING HOUSE

25' 6"

2x10 RUMBER WITH NAILER

2x10 FLOOR STRINGERS

2x2 NAILER

5/8x6 DECK

TIMBER NAILS THIS END

2x10 FRONT RUNNERS

APX 8'

APX 8'

APX 8'

CONCRETE FOOTINGS ARE EXISTING

FOOTINGS ARE EXISTING

STEPS SAME SIZE AS EXISTING MADE WITH SAME MATERIAL WITH CHILD SAFERAIL 5 RISES 4 TREADS

DECK RAILS

NEW TO TOP OF RAIL 4 1/2"

BALUSTERS SPACED 3' ON CENTER

BOTTOM RAIL 2x4

BALUSTERS SPACED 3' ON CENTER

BOTTOM CLOSED IN WITH PLY WOOD AND TRIM BOARDS

SPACED 3' ON CENTER

1 2 3

27' 2" Existing Building

DECK

25' 8"

7'

FENCE

8' 4"

STEPS

8' 4"

70' 4"

6' 1"

5' 4"

78' 4"


SIDE WALL

DRIVEWAY

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40

AVENUE

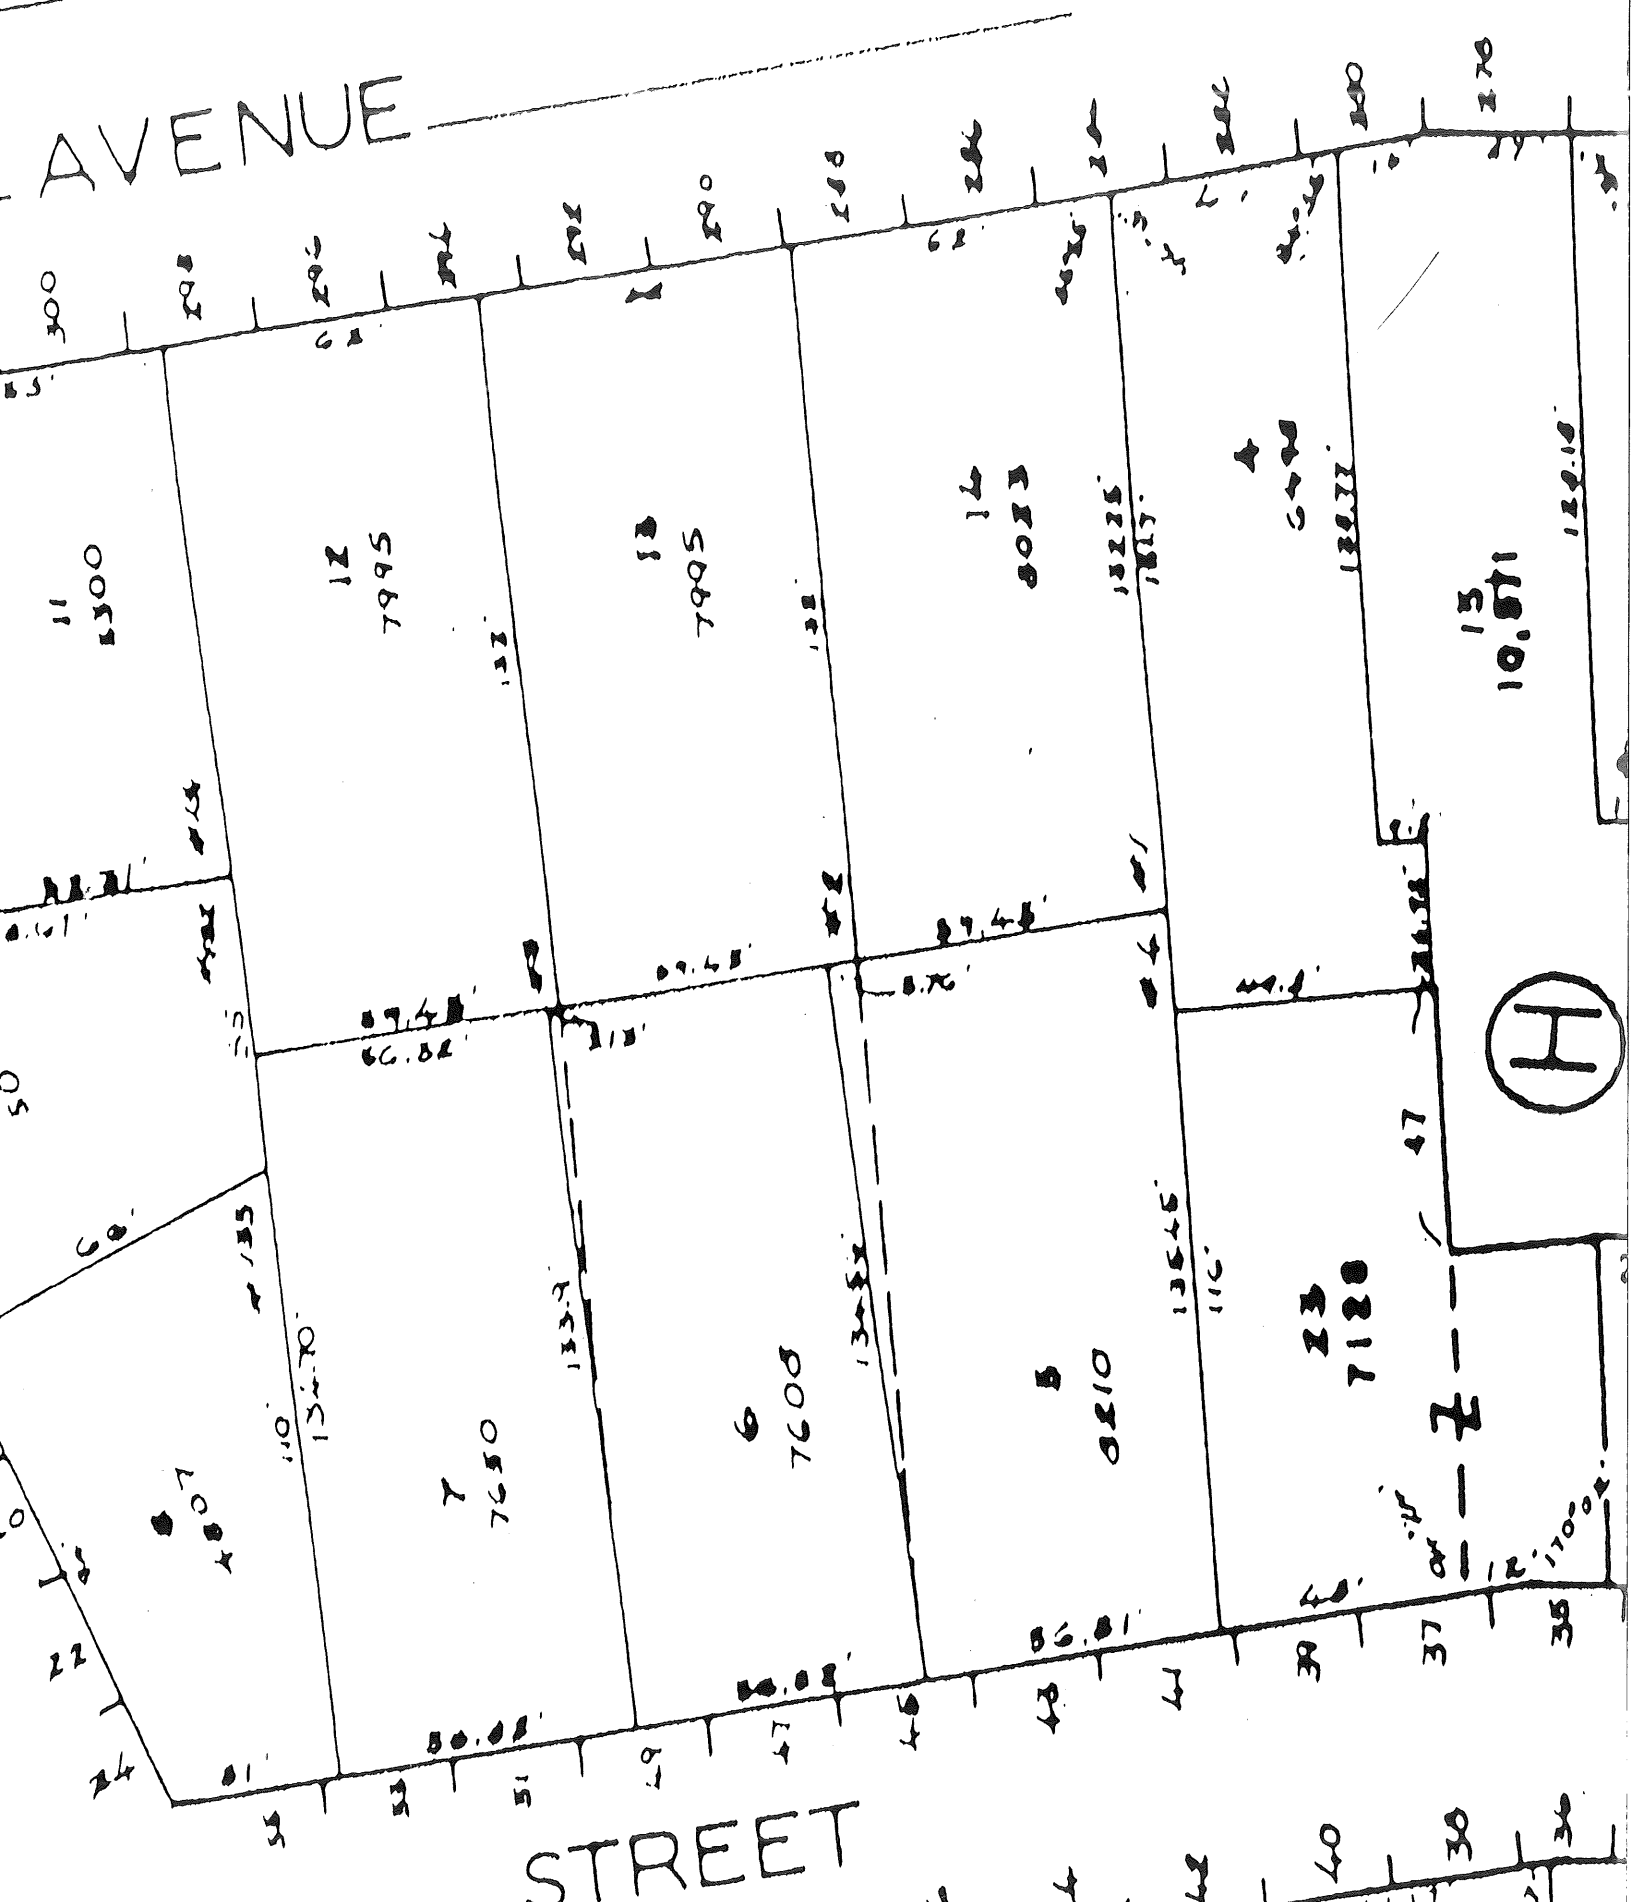

STREET



Z

300

298

296

294

292

290

288

286

284

282

280

278

11
1300

12
7995

13
7995

14
8023

15
14501

16
7608

17
7650

18
8810

19
7120

22

24

31

33

35

37

47

46

43

41

39

37

35

35

33

31

29

27

25

23

21

19

17

15

40

38

36

30

28

26

24

22

20

18

16

14

12

10

8

6

4

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45

43

41

39

37

35

33

31

29

50

48

46

44

42

40

38

36

34

32

30

28

26

24

50

48

46

44

42

40

38

36

34

32

30

28

26

24

55

53

51

49

47

45