

961180

Location of Construction: 100 Sewall St		Owner: Concord Trailways		Phone:	
Owner Address:		Leasee/Buyer's Name:		Phone:	
Contractor Name: Ludgewood, Inc.		Address: P.O. Box 8107 Portland, ME 04104		Phone: 767-1866	
Past Use: Bus Terminal		Proposed Use: Same		COST OF WORK: \$	
				PERMIT FEE: \$ 35.00	
				FIRE DEPT. <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied	
				INSPECTION: Use Group: Type:	
		Signature: <i>[Signature]</i>		Signature:	
Proposed Project Description: Install above-ground propane tank (1,000 gallon)		PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.)			
		Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/>			
		Signature:		Date:	
Permit Taken By: Mary Gresik		Date Applied For: 26 November 1996			

PERMIT ISSUED
Permit Issued:
DEC - 4 1996
CITY OF PORTLAND

Zone: I-2 CBL: 189-G-01
Zoning Approval: *[Signature]*
Special Zone or Reviews:
 Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal
 Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation
 Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:
 Approved
 Approved with Conditions
 Denied
Date: *[Signature]*

1. This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

[Signature]

26 November 1996

SIGNATURE OF APPLICANT Joseph Satlik ADDRESS: DATE: PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:


PERMIT ISSUED WITH REQUIREMENTS

CEO DISTRICT 4

COMMENTS

12/30/90 Not permanently installed yet.

1/6/97- Final C of I inspection. Inspected by Lt. McDougall Sd.

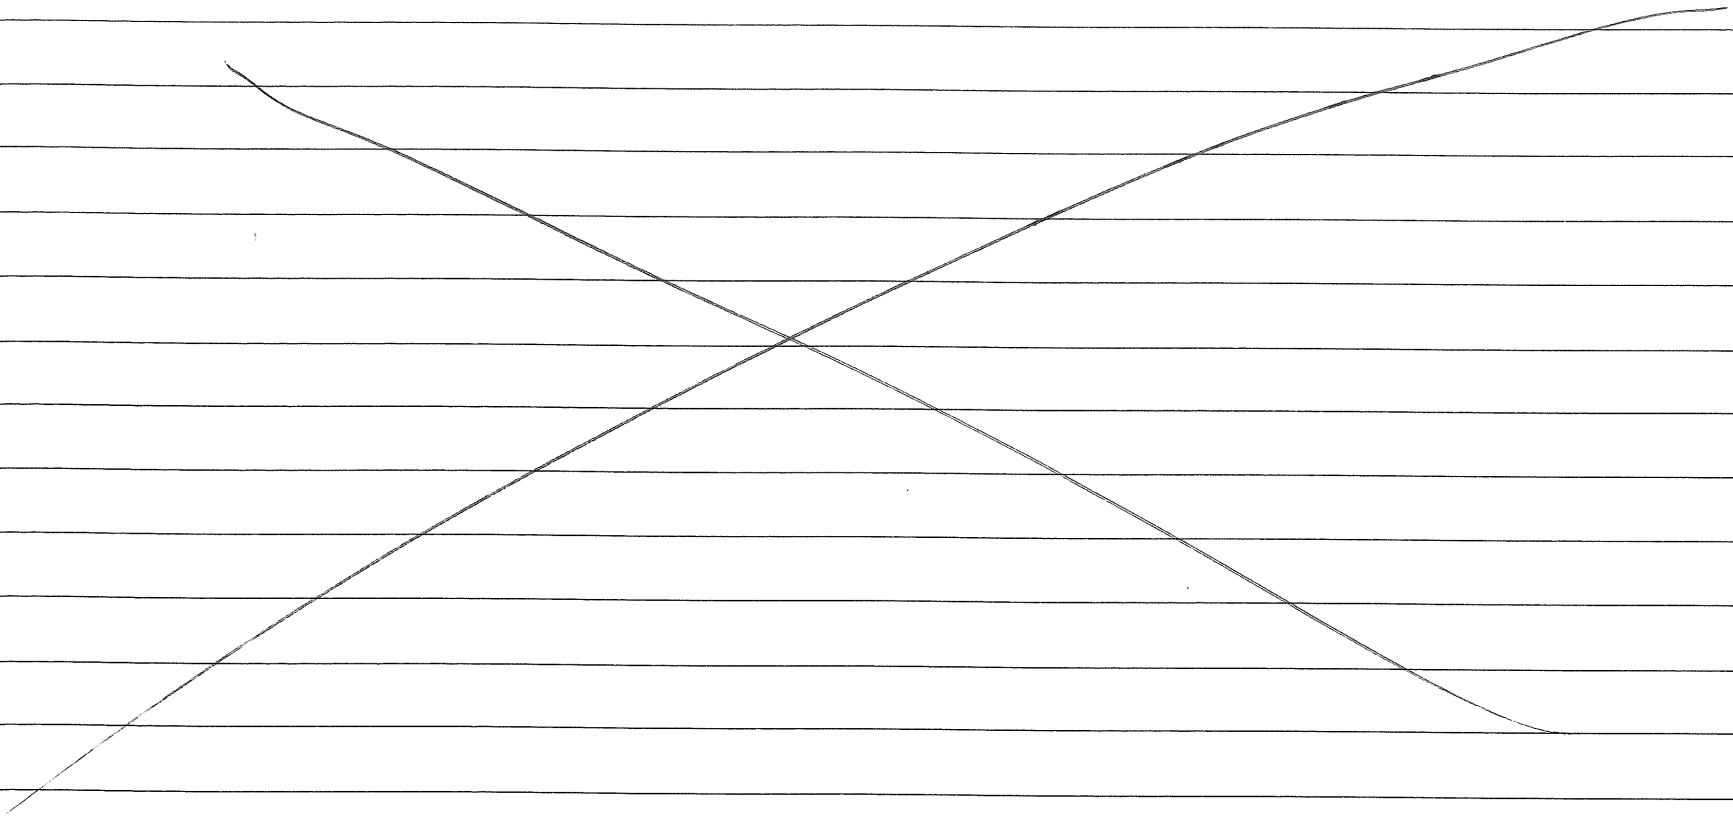

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

FIRE CODE PERMIT REPORT

DATE: 11/24/76 ADDRESS: 101 S.W. 11 St

PERMIT TO: Lodge Wood Inc


OWNER/CONTRACTOR: _____

APPROVED *11/24/76 DENIED _____

CONDITIONS OF APPROVAL/DENIAL

1. The boiler or furnace shall be protected by enclosing with one hour fire rated construction including fire doors and ceiling or by providing automatic extinguishment and smoke protected enclosure. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply system having a capacity sufficient to provide a 0.15 gpm, per square foot of floor throughout the entire area. An indicating shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
2. All required Fire Alarm Systems shall have the capability of "Zone Disconnect" via switches or key pad program provided the method is approved by the Fire Prevention Bureau.
3. All remote annunciators shall have a visible "trouble" indicator along with the Fire Alarm "Zone" indicators.
4. Any Master Box connected to the Municipal Fire Alarm System shall have a supervised Municipal Disconnect Switch.
5. All Master Box locations shall be approved by the Fire Department Director of Communications. A Master Box shall be located so that the center of the box is five feet above finished floor.
6. All Master Box locations are required to have a locked box (knoxbox).
7. A fire alarm acceptance report shall be submitted to the Portland Fire Department.
8. All underground tank removal(s) and/or installation(s) shall be done in accordance with the Department of Environmental Regulations (Chapter 691).
9. No cutting of tanks on site. Cutting of tanks is to be done at an approved tank disposal site.
10. Fire Dispatcher must be at least 48 hours in advance of removal and/or transportation of tanks.
11. All above ground L/P storage tanks shall be located in accordance with NFPA 58 Standards.
12. Any tank located near the path of vehicle movement shall be protected with appropriate permanent barricades.

13. All piping shall be protected from possible mechanical damage and vandalism.
14. A 4" storz fire department connection is required.
15. Any new sprinkler construction over six sprinkler heads needs to have State Fire Marshal approval.
16. Any renovations of sprinkler systems over 20 sprinkler heads needs to have State Fire Marshal approval.
17. A sprinkler performance test shall be submitted to the Portland Fire Department after completion of sprinkler work.
18. State Fire Marshal approval is required for this project.



Lt. G. McDougall
Fire Prevention Officer
City of Portland