

NOTES:

- #1 - INFILL EXISTING WINDOWS WITH METAL STUDS INSULATION AND 5/8" GWB BOTH SIDES. FLUSH GWB WITH FINISH ON BOTH SIDES OF WALL. SEE SHEET A-602
- #2 - INFILL EXISTING WINDOWS WITH METAL STUDS INSULATION AND 5/8" GWB ON THE SIDE OF THE WINDOW OPENING SHOWN ON THE PLANS. PROVIDE FLUSH CONDITION ON FACE SHOWN ON PLANS. PROVIDE GWB HEAD AND JAMB FINISH ON RECESSED SIDE OF OPENING. PROVIDE NEW PAINTED WOOD SILL ON RECESSED SIDE OF OPENING. SEE DETAILS A-602

- #3 - RELOCATE AND ENLARGE MASONRY OPENING FOR NEW CORRIDOR. PROVIDE NEW LINTEL PER STRUCT DRWGS.
- #4 - REMOVE EXISTING WINDOW SILL TO BELOW NEW EXPANSION FLOOR. PROVIDE GWB FINISHED HEAD AND JAMBS OVER EXISTING BRICK AND HEAD LINTEL
- #5 - INFILL EXISTING WINDOW WITH METAL STUDS INSULATION AND 5/8" GWB. PROVIDE FLUSH CONDITION ON FACE SHOWN ON PLANS. REUSE NEW SILL PROVIDED IN PHASE 1. SEE DETAILS A-602
- #6 - INFILL EXISTING WINDOW WITH METAL STUDS INSULATION AND 5/8" GWB. PROVIDE FLUSH CONDITION ON FACE SHOWN ON PLANS. BRICK HEAD, JAMB AND SILL TO REMAIN EXPOSED ON FORMER EXTERIOR WALL. SEE DETAILS A-602


- #7 - SEE INTERIOR ELEVATIONS FOR EXTENT OF REMOVAL OF EXISTING EXTERIOR BRICK IN AREAS NOTED. REMOVE BRICK WHERE SHOWN AND INFILL WITH METAL STUDS INSULATION AND 5/8" GWB. PROVIDE FLUSH CONDITION WITH FACE OF BRICK AS SHOWN ON ELEVATIONS. REMOVE WINDOW SILL AT LOCATIONS SHOWN ON INTERIOR ELEVATIONS. SEE DETAILS ON SHEET A-602
- #8 - SEE INTERIOR ELEVATIONS FOR LAYOUT OF LIBRARY ANNEX. ALL ITEMS IN LIBRARY ANNEX TO BE FABRICATED BY MILLWORK SUPPLIER INCLUDING CLOSET DOORS, SHELVING, CABINETS, ETC. ALL HARDWARE REQUIRED SUPPLIED BY MILLWORK.

GRAPHIC KEY:

- NEW CONSTRUCTION
NOTE: NEW INTERIOR PARTITIONS MAY CONTAIN GLAZING BEYOND 6' AFF. SEE INTERIOR ELEVATIONS FOR WALL DETAIL
- EXISTING CONSTRUCTION TO REMAIN
- EXAM SINK AND/OR CASEWORK WITH CABINETS ABOVE
- WORK COUNTERS AND CASEWORK ABOVE
- COAT CLOSET WITH HANGING ROD AND SHELF
- WALL MOUNTED LIGHT FIXTURE SEE ELEC DRWGS
- WALL WITH INTERIOR GLAZING
- SKYLIGHT

FLOORING KEY:


- EXIST CPT EXISTING CARPET TO REMAIN
- CPT NEW CARPET
- CT NEW CERAMIC TILE
- CPT NEW CARPET
- VCT NEW VINYL TILE
- CPT NEW CARPET
- CT NEW CERAMIC TILE

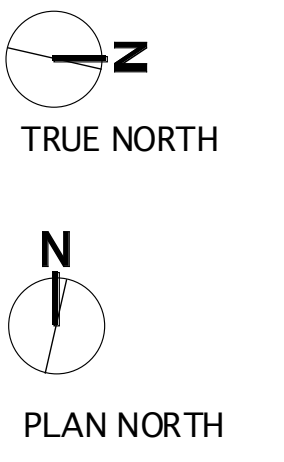

HC 5' DIA WHEELCHAIR TURNING

Design Firm
HKTA Architects, Inc.
 4005 Street
 Portland, Maine 04102
 Phone: 207-774-6998
 Fax: 207-774-6999
 www.hkta.com

Consultant

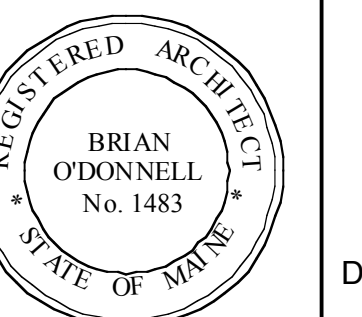

Project Title

ORTHOPAEDIC ASSOCIATES, PA
 BUILDING EXPANSION
 33 SEWALL STREET
 PORTLAND, MAINE

Mark	Date	Description
Issue Revision		
Project ID	20040180A	
CAD File Name	2004018 CA Phase I	
Drawn By		
Checked By		
Issue Date	2/2/05	
Plot Date	2/2/05	
Reviewed by		
Designed by		
Submitted by		
Drawing Code	Floor Plan-2	
Sheet Title		

Floor Plan-2

Drawing No.

A-102

of

1 SECOND FLOOR PLAN - PHASE 2
A-102 Scale: 1/8" = 1'-0"

- GEN. NOTES:
- 1. PROVIDE BLOCKING IN NEW AND EXISTING WALLS REQUIRED FOR SECURE ATTACHMENT OF WALL HUNG CASEWORK, SEATING, WORKSURFACES, GRAB BARS, TOILET ACCESSORIES, TOILET PARTITIONS AND WALL MOUNTED EQUIPMENT PROVIDED BY THE CONTRACTOR AND/OR OWNER.
 - 2. WHERE SHOWERS ARE SHOWN ON THE PLAN CONFIRM WITH SHOWER TYP THE REQUIREMENTS FOR DEPRESSED FLOOR SLAB TO MAINTAIN HANDICAPPED ACCESS PER ADA REQUIREMENTS.
 - 3. CONTRACTOR TO VERIFY ALL DIMENSIONS IN FIELD PRIOR TO CONSTRUCTION. DIMENSIONS THAT VARY +/- 2" FROM PLAN DIMENSIONS REQUIRE ARCHITECT VERIFICATION PRIOR TO INSTALLATION OF ANY NEW CONSTRUCTION.
 - 4. WHERE SHOWN PROVIDE BENCHES AND/OR SHELVING. SEE INTERIOR ELEVATIONS AND SPECIFICATION.